
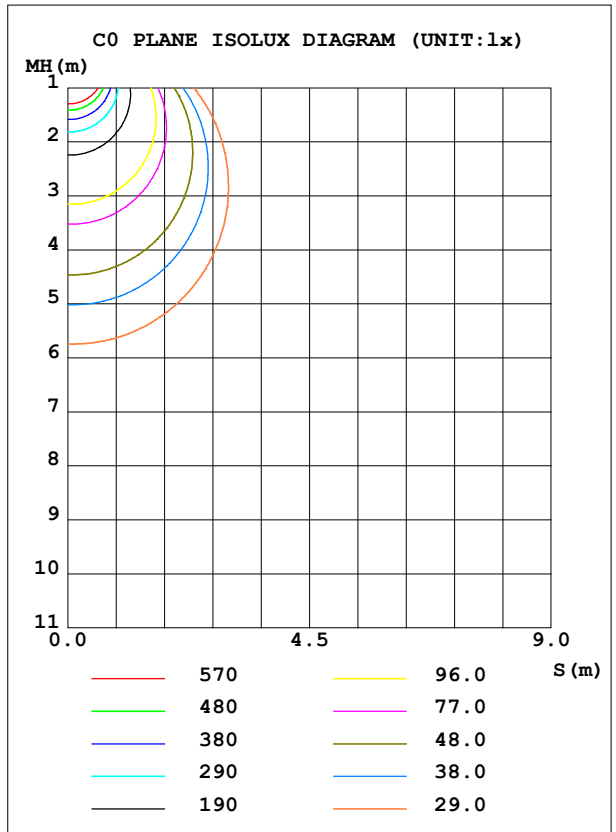


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.36V I:0.1092A P:24.787W PF:0.9446 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3691.7x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	E-B40W	Imax (cd)	957.4	S/MH (C0/180)	1.34
NOMINAL POWER (W)	25	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	3691.7	η UP, DN (C0-180)	6.4, 43.0
NOMINAL FLUX (lm)	3691.7	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	7.0, 43.5
LAMPS INSIDE	1	η up (%)	13.5	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	240	η down (%)	86.5	CIBSE SHR MAX	1.50

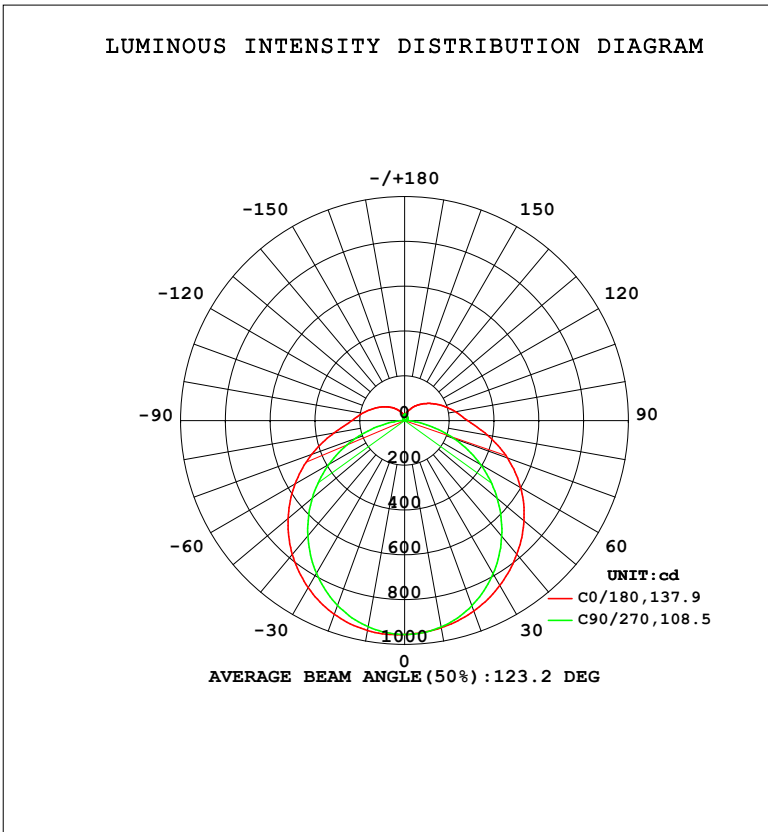

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	952.2	945.5	935.5	936.0	939.7	936.5	936.3	945.5	0- 10	90.52	90.52	2.45,2.45
20	920.2	903.4	878.0	890.0	904.8	890.4	879.7	903.2	10- 20	260.4	350.9	9.5,9.5
30	861.7	831.1	788.0	819.7	850.6	820.5	790.1	830.2	20- 30	398.0	748.9	20.3,20.3
40	780.5	733.6	672.5	729.8	779.9	731.0	675.1	732.5	30- 40	487.7	1237	33.5,33.5
50	679.3	617.9	538.2	625.8	696.0	626.4	540.4	615.8	40- 50	521.2	1758	47.6,47.6
60	564.5	490.5	389.9	511.1	598.5	511.4	391.5	487.8	50- 60	497.9	2256	61.1,61.1
70	441.4	358.6	233.7	389.8	488.6	389.5	234.5	355.5	60- 70	423.6	2679	72.6,72.6
80	320.2	234.1	85.68	270.9	375.3	270.4	85.63	231.0	70- 80	313.3	2993	81.1,81.1
90	235.7	151.4	1.903	182.0	282.2	181.9	1.761	148.7	80- 90	201.6	3194	86.5,86.5
100	191.6	116.7	3.576	141.6	231.2	142.0	3.611	114.6	90-100	144.2	3339	90.4,90.4
110	154.2	91.06	6.500	112.6	188.2	113.0	6.923	89.93	100-110	112.5	3451	93.5,93.5
120	122.7	65.61	9.524	90.62	151.4	91.26	10.41	65.27	110-120	84.79	3536	95.8,95.8
130	95.68	46.42	12.32	73.45	119.3	73.90	13.56	47.17	120-130	60.88	3597	97.4,97.4
140	72.87	34.37	14.71	59.24	91.52	59.62	16.32	34.87	130-140	41.87	3639	98.6,98.6
150	53.12	25.46	18.65	47.35	66.69	47.75	19.15	26.03	140-150	27.01	3666	99.3,99.3
160	36.99	21.21	23.06	37.23	46.83	36.00	23.63	20.98	150-160	15.87	3681	99.7,99.7
170	24.38	19.19	26.52	26.88	29.62	26.53	27.21	19.14	160-170	7.966	3689	99.9,99.9
180	17.98	28.35	28.72	28.50	18.00	28.37	28.77	28.46	170-180	2.266	3692	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1496.7 lm

%lum = 40.5%

%lamp = 40.5%

Conical surface Flux(120deg): 2255.8 lm

%lum = 61.1%


%lamp = 61.1%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.36V I:0.1092A P:24.787W PF:0.9446 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3691.7x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

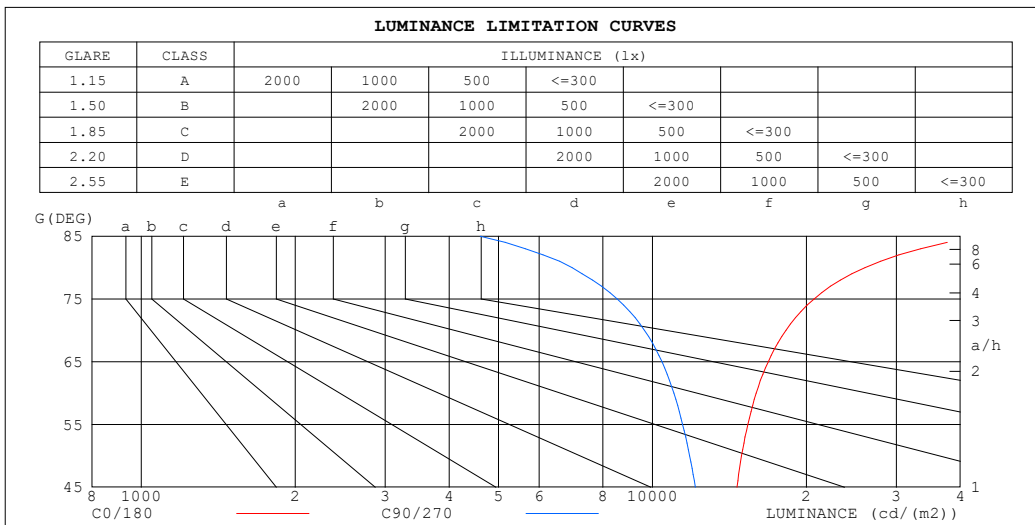

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	43741	4604
80	26057	6967
75	20706	8528
70	18236	9648
65	16848	10434
60	15955	11010
55	15372	11457
50	14934	11823
45	14630	12129


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.36V I:0.1092A P:24.787W PF:0.9446 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3691.7x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.96	.96	.96	.90	.90	.90	.87
1.0	.98	.93	.89	.95	.90	.86	.88	.84	.81	.82	.79	.76	.76	.73	.71	.68
2.0	.84	.77	.71	.81	.75	.69	.76	.70	.65	.70	.66	.62	.65	.62	.58	.55
3.0	.74	.65	.58	.71	.63	.57	.66	.59	.54	.61	.56	.51	.57	.53	.49	.46
4.0	.65	.56	.49	.63	.54	.47	.58	.51	.45	.54	.48	.43	.51	.46	.41	.39
5.0	.58	.48	.41	.56	.47	.41	.52	.45	.39	.49	.42	.37	.45	.40	.36	.33
6.0	.52	.43	.36	.50	.41	.35	.47	.39	.34	.44	.37	.32	.41	.35	.31	.29
7.0	.47	.38	.31	.45	.37	.31	.42	.35	.30	.40	.33	.29	.37	.32	.28	.25
8.0	.42	.34	.28	.41	.33	.27	.39	.32	.26	.36	.30	.25	.34	.29	.25	.22
9.0	.39	.31	.25	.38	.30	.25	.36	.29	.24	.34	.27	.23	.32	.26	.22	.20
10.0	.36	.28	.23	.35	.27	.22	.33	.26	.21	.31	.25	.21	.29	.24	.20	.18

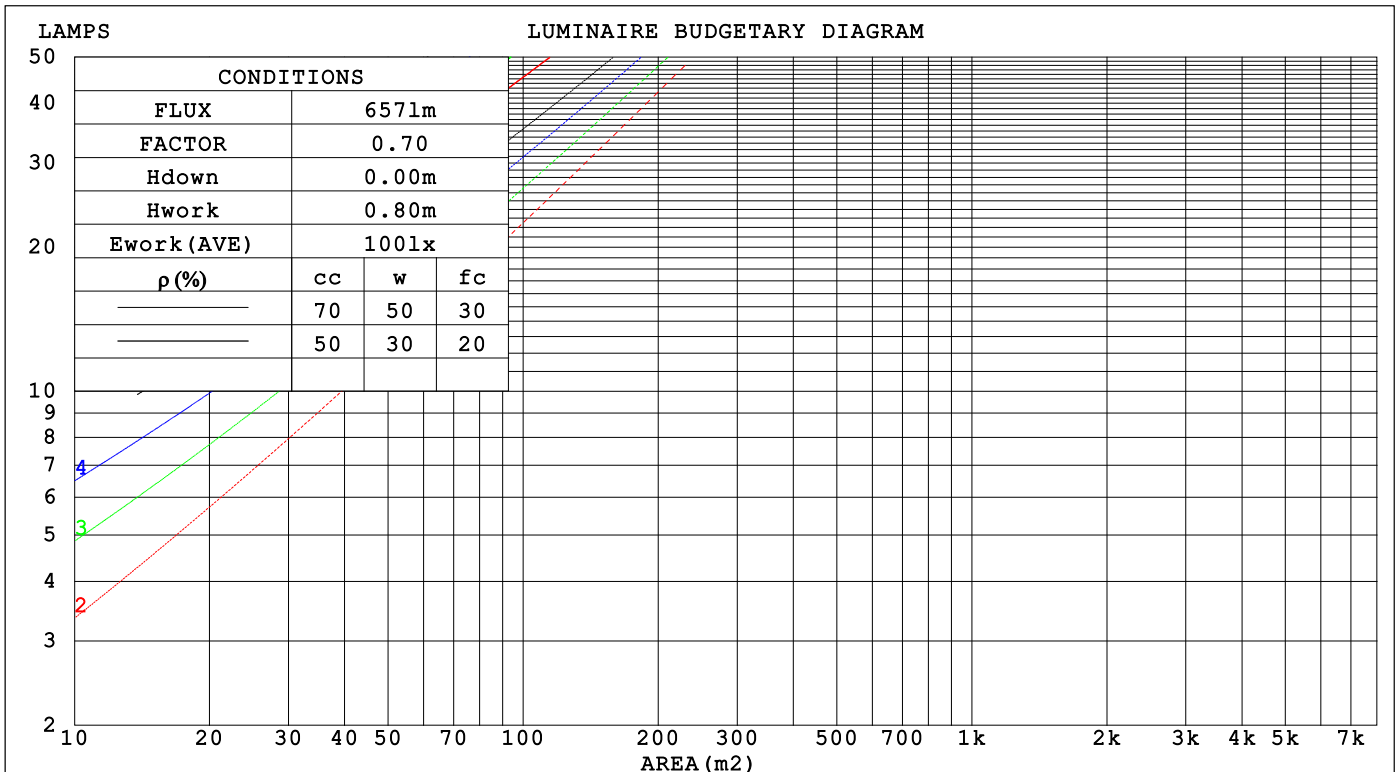

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.36V I:0.1092A P:24.787W PF:0.9446 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3691.7x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.358	.203	.064	.346	.197	.063	.325	.187	.060	.306	.176	.057	.288	.167	.054	
2.0	.318	.174	.053	.307	.169	.052	.288	.160	.050	.271	.152	.048	.255	.144	.045	
3.0	.286	.152	.046	.277	.148	.045	.260	.141	.043	.244	.134	.041	.229	.127	.039	
4.0	.260	.135	.040	.251	.132	.039	.236	.125	.037	.221	.119	.036	.208	.113	.034	
5.0	.237	.121	.035	.230	.118	.034	.216	.112	.033	.203	.107	.032	.191	.102	.031	
6.0	.218	.109	.031	.212	.107	.031	.199	.102	.030	.187	.097	.029	.176	.093	.027	
7.0	.202	.100	.028	.196	.098	.028	.184	.093	.027	.173	.089	.026	.163	.085	.025	
8.0	.188	.092	.026	.182	.090	.025	.172	.086	.024	.162	.082	.024	.152	.078	.023	
9.0	.175	.085	.024	.170	.083	.023	.160	.079	.022	.151	.076	.022	.143	.072	.021	
10.0	.164	.079	.022	.160	.077	.022	.151	.074	.021	.142	.071	.020	.134	.068	.019	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.293	.293	.293	.251	.251	.251	.171	.171	.171	.098	.098	.098	.031	.031	.031	
2.0	.287	.259	.234	.246	.222	.201	.168	.153	.139	.097	.089	.081	.031	.029	.026	
3.0	.280	.236	.199	.240	.203	.172	.164	.141	.120	.095	.082	.070	.030	.026	.023	
4.0	.272	.219	.177	.233	.189	.153	.160	.131	.108	.093	.077	.063	.030	.025	.021	
5.0	.265	.206	.162	.227	.178	.141	.156	.124	.099	.090	.073	.059	.029	.024	.019	
6.0	.257	.196	.152	.221	.170	.132	.152	.119	.093	.088	.070	.055	.028	.023	.018	
7.0	.250	.188	.144	.215	.163	.126	.148	.114	.089	.086	.067	.053	.028	.022	.017	
8.0	.243	.182	.139	.209	.158	.121	.144	.110	.086	.084	.065	.051	.027	.021	.017	
9.0	.236	.176	.135	.203	.153	.118	.141	.107	.083	.082	.063	.050	.026	.021	.016	
10.0	.230	.171	.132	.198	.149	.115	.137	.104	.082	.080	.062	.049	.026	.020	.016	
10.0	.224	.167	.129	.193	.145	.113	.134	.102	.080	.078	.060	.048	.025	.020	.016	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.36V I:0.1092A P:24.787W PF:0.9446 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3691.7x1 lm										
NAME: E-B40W				TYPE: 25W				WEIGHT:		
SPEC.: 3000K				DIM.:				SERIAL No.:		
MFR.: EVERFINE				SUR.: 1.161*0.061				Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.7	23.1	22.1	23.5	24.0	20.4	21.8	20.8	22.2	22.7
3H	23.9	25.2	24.4	25.6	26.1	21.8	23.1	22.3	23.6	24.1
4H	25.0	26.2	25.5	26.7	27.3	22.4	23.6	22.9	24.1	24.6
6H	26.2	27.4	26.8	27.9	28.4	22.7	23.9	23.2	24.4	24.9
8H	26.9	28.0	27.4	28.5	29.1	22.8	23.9	23.3	24.4	25.0
12H	27.7	28.7	28.2	29.3	29.8	22.8	23.9	23.4	24.4	25.0
4H 2H	22.2	23.4	22.7	23.9	24.5	21.3	22.5	21.8	23.0	23.5
3H	24.6	25.7	25.2	26.2	26.8	23.0	24.0	23.5	24.6	25.1
4H	25.9	26.9	26.5	27.5	28.1	23.7	24.7	24.2	25.2	25.8
6H	27.3	28.2	27.9	28.8	29.4	24.2	25.1	24.8	25.6	26.3
8H	28.1	28.9	28.7	29.5	30.2	24.4	25.2	25.0	25.8	26.4
12H	29.0	29.8	29.6	30.4	31.1	24.4	25.2	25.1	25.8	26.5
8H 4H	26.2	27.0	26.8	27.6	28.3	24.3	25.2	24.9	25.7	26.4
6H	27.9	28.6	28.5	29.2	29.9	25.2	25.9	25.8	26.5	27.2
8H	28.8	29.4	29.5	30.1	30.8	25.5	26.1	26.1	26.7	27.5
12H	30.0	30.5	30.6	31.1	31.9	25.7	26.3	26.4	26.9	27.7
12H 4H	26.2	27.0	26.8	27.6	28.3	24.5	25.3	25.1	25.9	26.6
6H	28.0	28.6	28.6	29.2	30.0	25.5	26.1	26.1	26.7	27.5
8H	29.0	29.5	29.7	30.2	31.0	26.0	26.5	26.6	27.2	27.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.5				

CIE Pub.117, 3692 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.5)
 Area: 0.070821 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.36V I:0.1092A P:24.787W PF:0.9446 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3691.7x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	51	39	31	50	38	31	48	37	31	24
0.80	60	48	40	59	47	39	56	46	39	31
1.00	68	56	48	66	55	47	63	55	46	38
1.25	75	63	55	73	62	54	69	60	53	44
1.50	80	69	61	78	67	60	73	64	58	48
2.00	87	77	69	84	75	68	79	72	66	55
2.50	92	82	75	89	80	73	83	76	70	59
3.00	95	87	80	92	84	78	86	80	75	62
4.00	100	92	87	96	90	84	90	85	80	67
5.00	102	96	91	99	93	88	92	88	84	70
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.36V I:0.1092A P:24.787W PF:0.9446 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3691.7x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

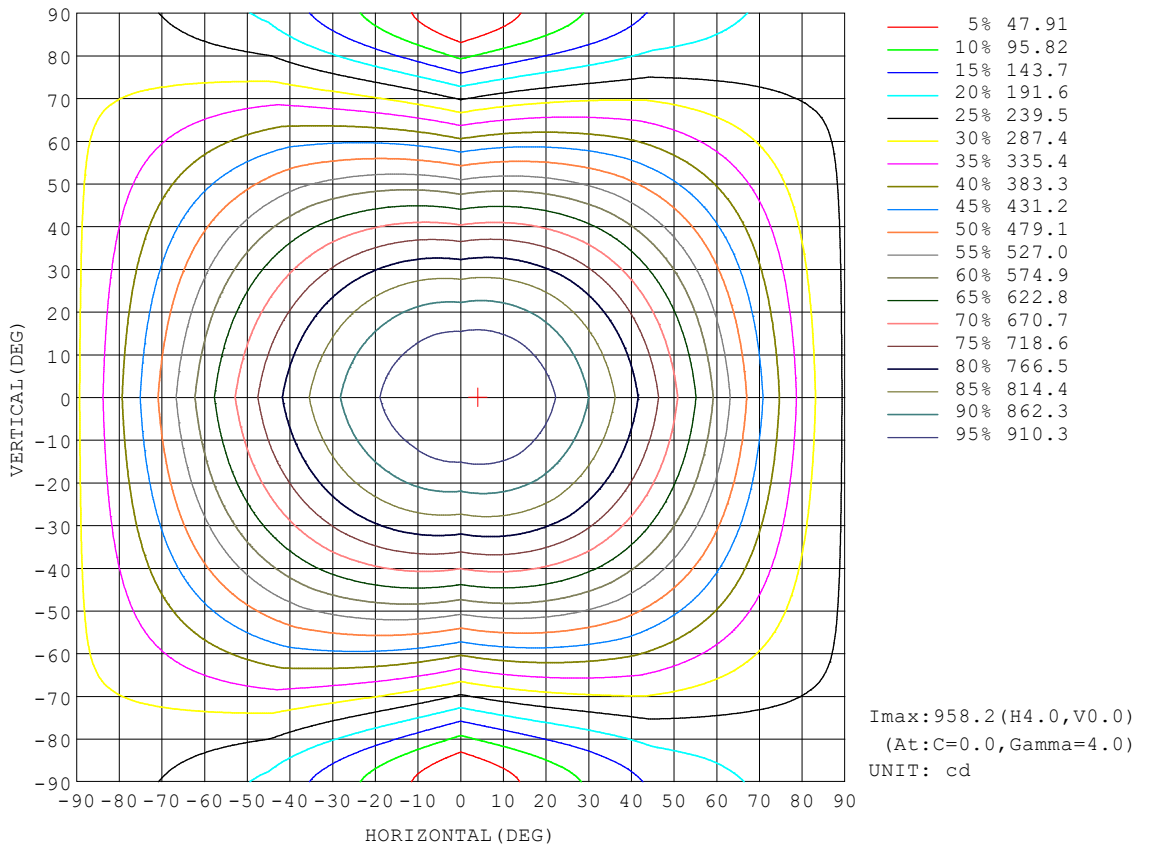


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.36V I:0.1092A P:24.787W PF:0.9446 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3691.7x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

Flux out:2013 lm

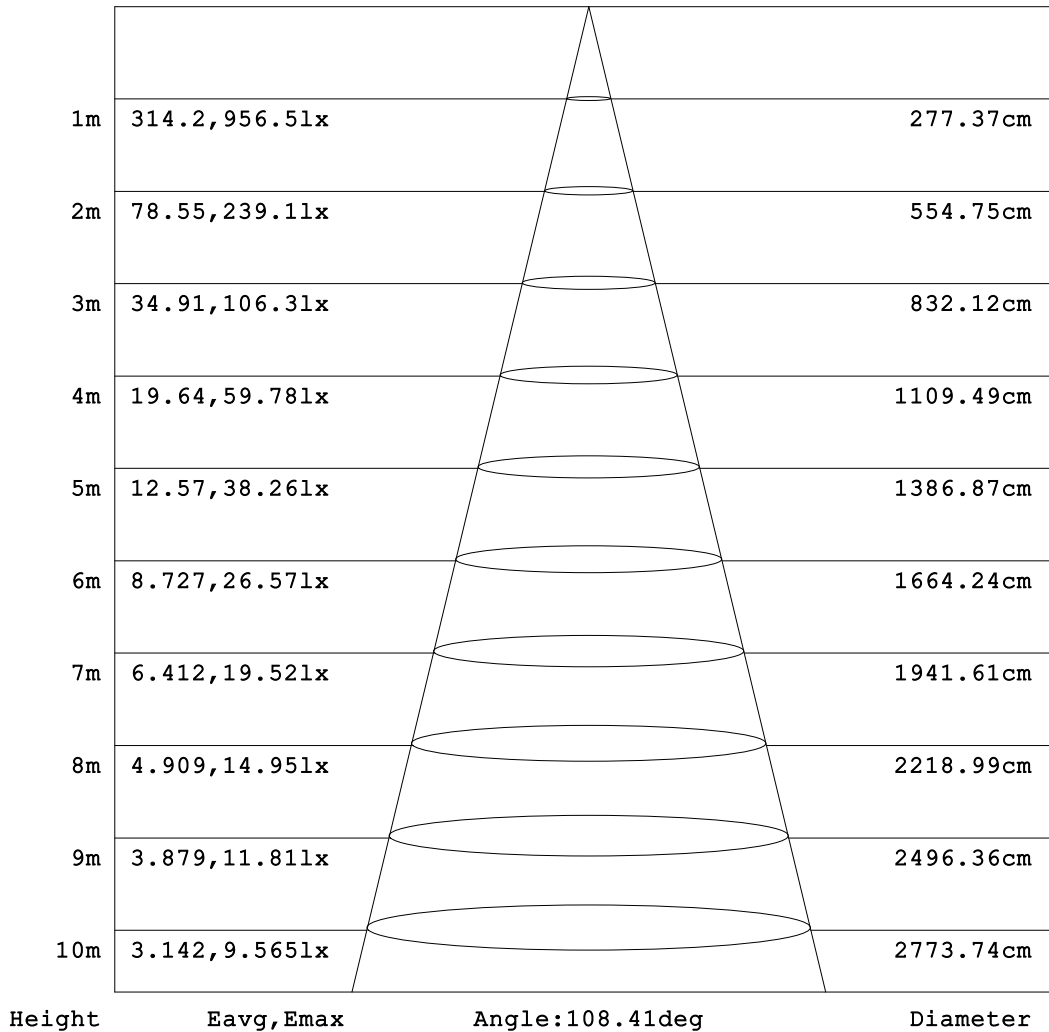


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.36V I:0.1092A P:24.787W PF:0.9446 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3691.7x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

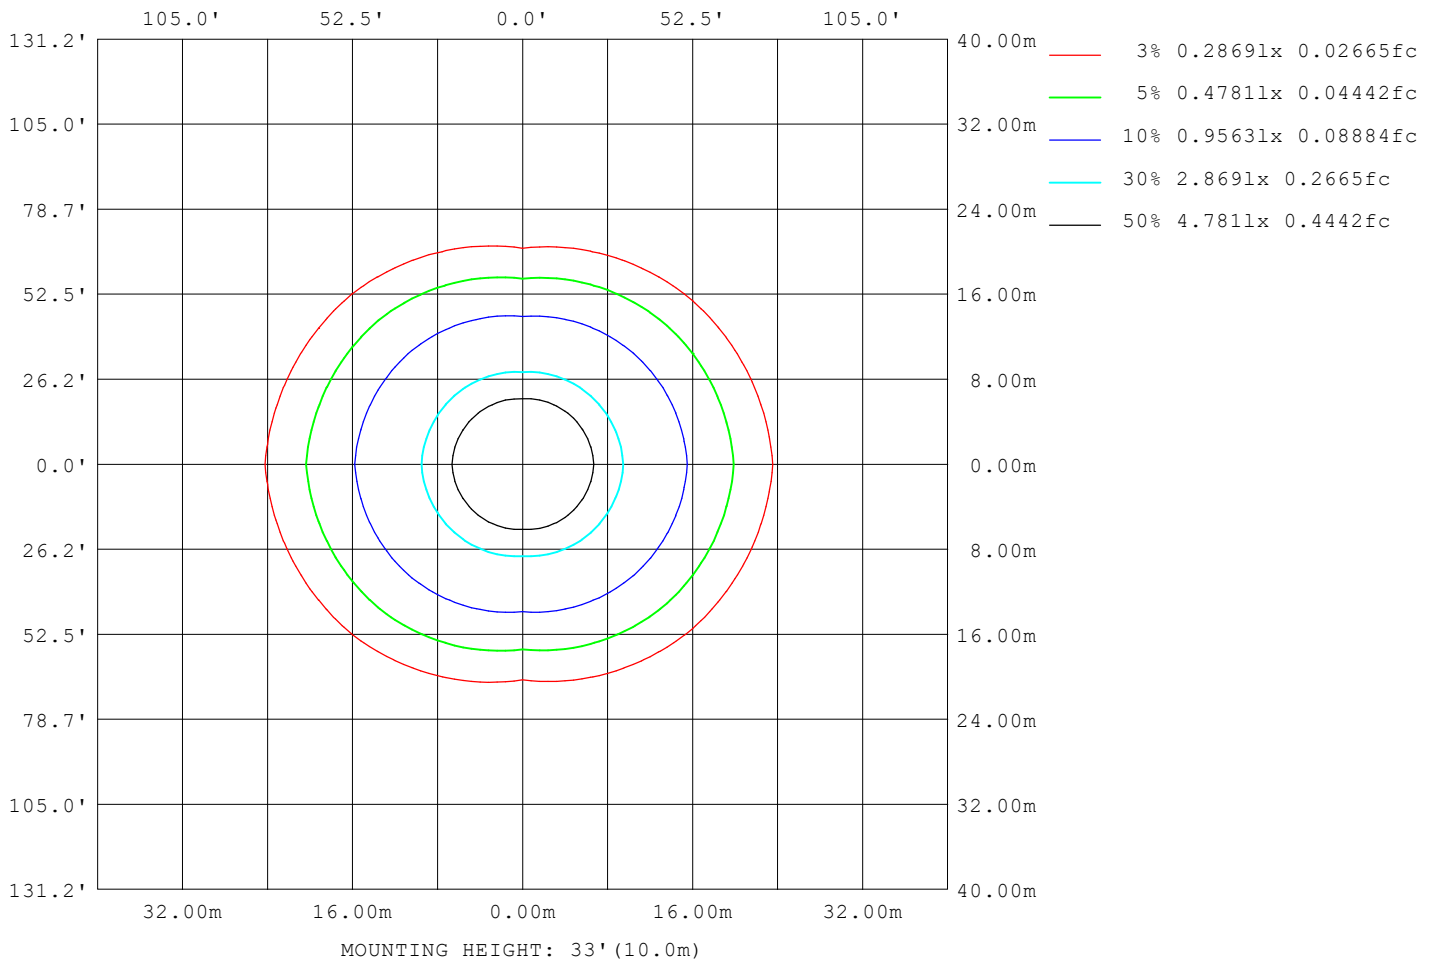

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.36V I:0.1092A P:24.787W PF:0.9446 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3691.7x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	17518
L_0~180 (75) av	22127
L_0~180 (85) av	48040
L_90~270 (65) av	10457
L_90~270 (75) av	8562
L_90~270 (85) av	4606
L_45 (65) av	14599
L_45 (75) av	16944
L_45 (85) av	32536

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

Planar Illuminance Curve

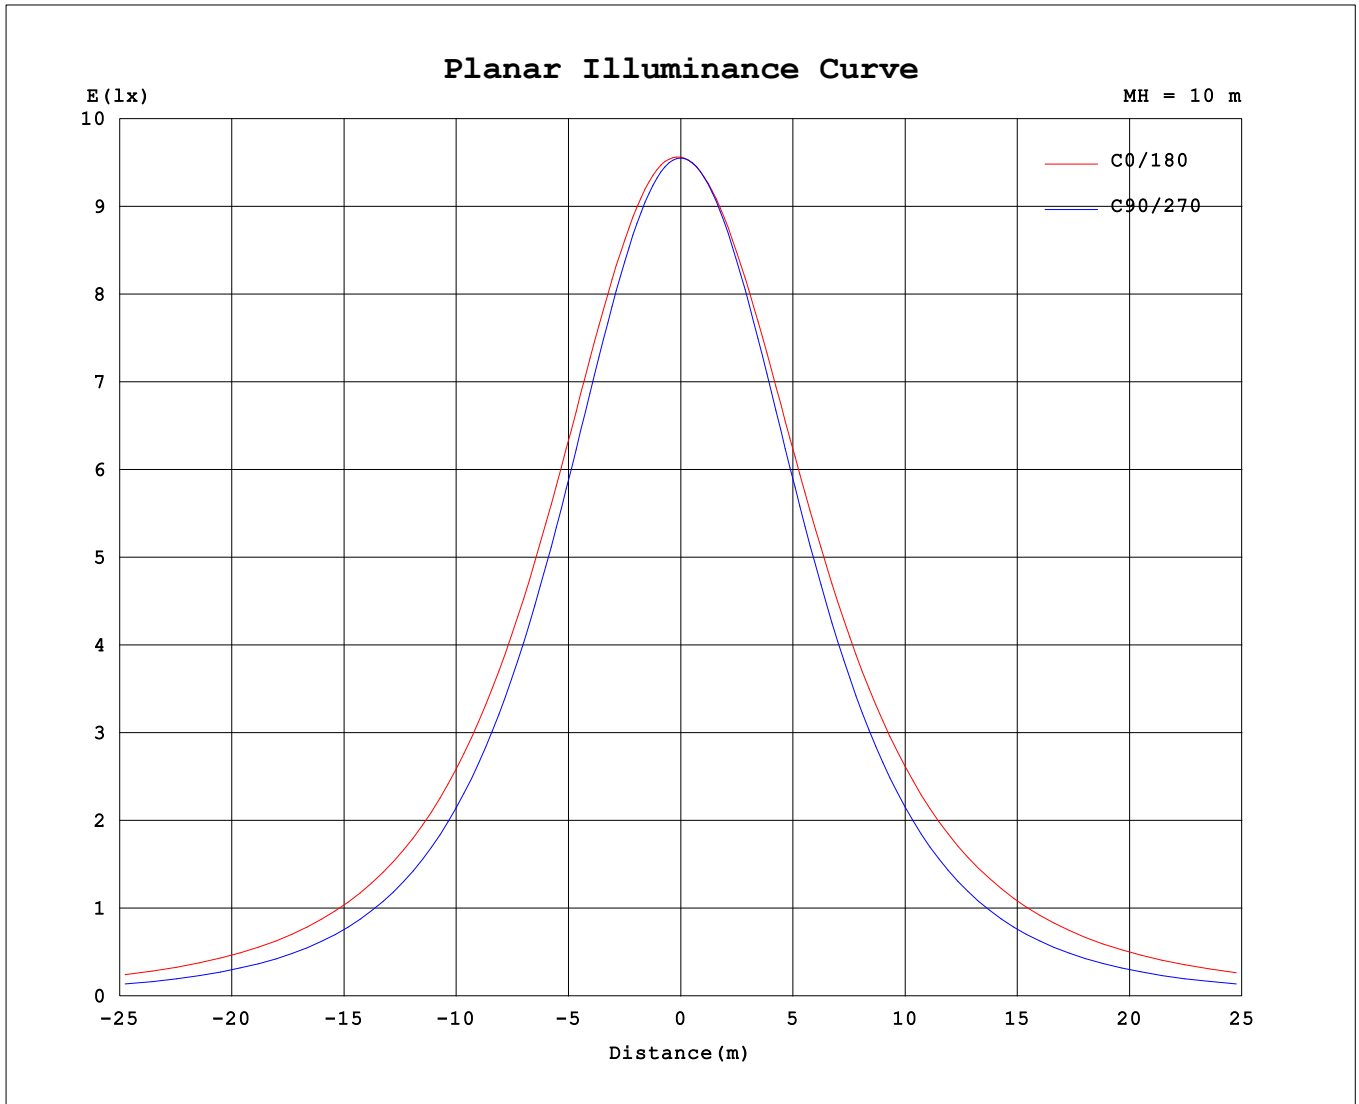

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.36V I:0.1092A P:24.787W PF:0.9446 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3691.7x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315										
0	956	956	956	956	956	956	956	956										
5	957	955	950	949	950	950	951	954										
10	952	946	935	936	940	936	936	946										
15	940	928	911	916	924	917	913	928										
20	920	903	878	890	905	890	880	903										
25	894	871	837	858	880	858	839	870										
30	862	831	788	820	851	821	790	830										
35	823	785	733	777	817	778	735	784										
40	781	734	672	730	780	731	675	732										
45	732	677	607	679	740	680	610	676										
50	679	618	538	626	696	626	540	616										
55	624	555	465	569	649	570	467	553										
60	565	491	390	511	599	511	392	488										
65	504	425	312	451	545	451	314	421										
70	441	359	234	390	489	389	234	355										
75	379	294	156	329	432	328	158	291										
80	320	234	85.7	271	375	270	85.6	231										
85	270	185	28.4	219	323	219	28.4	181										
90	236	151	1.90	182	282	182	1.76	149										
95	213	132	2.40	159	255	160	2.15	130										
100	192	117	3.58	142	231	142	3.61	115										
105	172	103	5.01	126	209	126	5.20	101										
110	154	91.1	6.50	113	188	113	6.92	89.9										
115	138	76.3	8.03	101	170	101	8.68	76.5										
120	123	65.6	9.52	90.6	151	91.3	10.4	65.3										
125	109	54.9	11.0	81.6	135	82.1	12.1	55.8										
130	95.7	46.4	12.3	73.4	119	73.9	13.6	47.2										
135	83.9	39.9	13.6	66.1	105	66.5	15.0	40.3										
140	72.9	34.4	14.7	59.2	91.5	59.6	16.3	34.9										
145	62.6	29.5	16.2	53.0	79.1	53.4	17.5	30.0										
150	53.1	25.5	18.7	47.3	66.7	47.8	19.2	26.0										
155	44.6	22.3	20.9	42.2	54.7	42.1	21.4	22.9										
160	37.0	21.2	23.1	37.2	46.8	36.0	23.6	21.0										
165	30.7	20.0	25.0	31.2	38.3	31.1	25.7	19.8										
170	24.4	19.2	26.5	26.9	29.6	26.5	27.2	19.1										
175	15.0	22.9	27.8	28.2	16.6	27.8	28.2	23.3										
180	18.0	28.4	28.7	28.5	18.0	28.4	28.8	28.5										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks: