
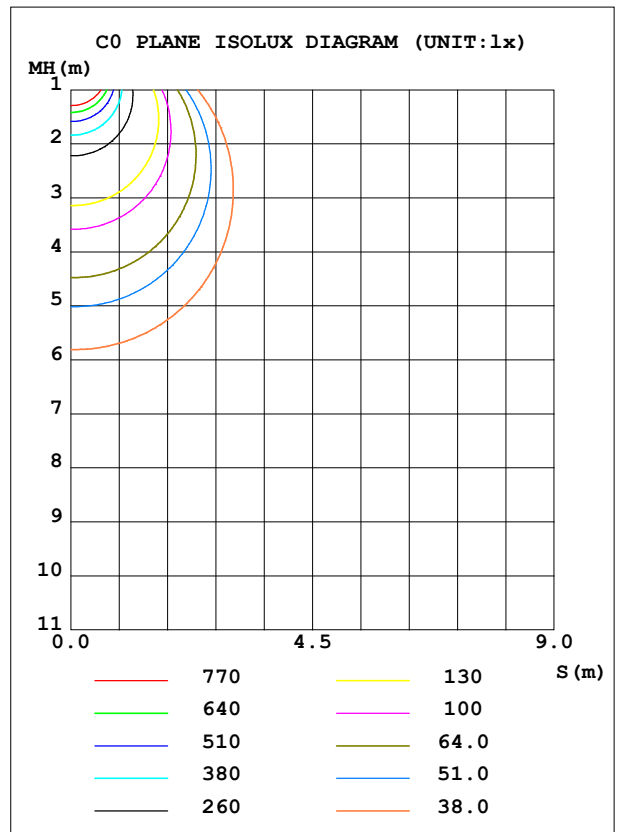


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.36V I:0.1471A P:33.862W PF:0.9579 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4941.89x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	E-B40W	Imax (cd)	1281	S/MH (C0/180)	1.34
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	4941.9	η UP, DN (C0-180)	6.4, 43.0
NOMINAL FLUX (lm)	4941.89	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	7.0, 43.5
LAMPS INSIDE	1	η up (%)	13.5	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	240	η down (%)	86.5	CIBSE SHR MAX	1.50

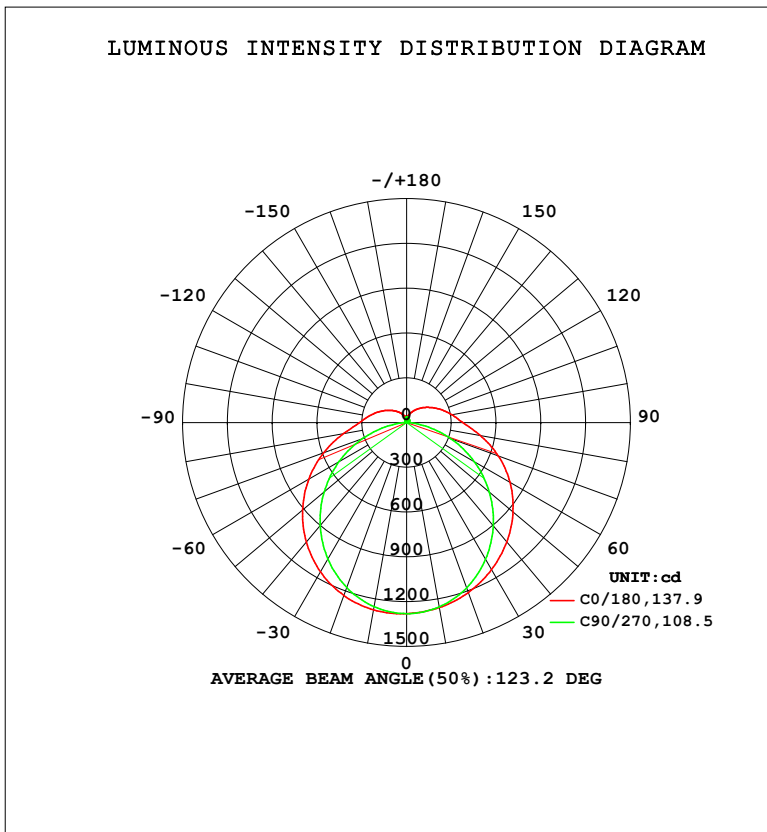

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1274	1266	1253	1253	1258	1253	1254	1267	0- 10	121.2	121.2	2.45,2.45
20	1232	1210	1176	1191	1211	1192	1178	1210	10- 20	348.6	469.8	9.51,9.51
30	1154	1114	1056	1097	1138	1098	1058	1113	20- 30	533.0	1003	20.3,20.3
40	1045	983.0	900.8	976.8	1044	977.7	904.0	981.0	30- 40	653.0	1656	33.5,33.5
50	909.6	827.9	720.9	837.0	930.8	837.4	723.4	825.0	40- 50	697.8	2354	47.6,47.6
60	756.2	657.6	522.3	683.9	800.1	683.6	524.0	653.9	50- 60	666.5	3020	61.1,61.1
70	591.4	480.8	312.8	521.1	653.9	520.5	313.9	476.8	60- 70	567.1	3587	72.6,72.6
80	429.4	314.4	113.8	362.1	501.8	360.9	114.8	310.0	70- 80	419.4	4007	81.1,81.1
90	315.9	202.5	2.530	242.1	377.3	242.6	2.410	199.5	80- 90	269.8	4276	86.5,86.5
100	256.9	156.7	4.791	188.7	309.0	189.3	4.884	153.5	90-100	193.0	4469	90.4,90.4
110	207.1	122.2	8.749	150.6	251.5	150.7	9.272	120.1	100-110	150.6	4620	93.5,93.5
120	164.3	87.97	12.79	121.2	201.8	121.3	13.91	87.49	110-120	113.4	4733	95.8,95.8
130	128.0	62.27	16.50	98.20	159.4	98.24	18.18	63.12	120-130	81.40	4815	97.4,97.4
140	97.13	46.06	19.72	79.18	122.5	79.58	21.86	46.66	130-140	55.98	4871	98.6,98.6
150	71.19	34.15	25.02	63.31	90.23	63.74	25.58	34.79	140-150	36.14	4907	99.3,99.3
160	49.55	28.42	30.91	49.55	61.40	49.44	31.65	28.15	150-160	21.35	4928	99.7,99.7
170	32.60	25.69	35.52	35.77	39.48	35.44	36.38	25.61	160-170	10.62	4939	99.9,99.9
180	24.06	38.00	38.40	38.07	24.10	38.01	38.45	38.05	170-180	3.031	4942	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2004 lm

%lum = 40.6%

%lamp = 40.6%

Conical surface Flux(120deg): 3020.2 lm

%lum = 61.1%


%lamp = 61.1%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.36V I:0.1471A P:33.862W PF:0.9579 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4941.89x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

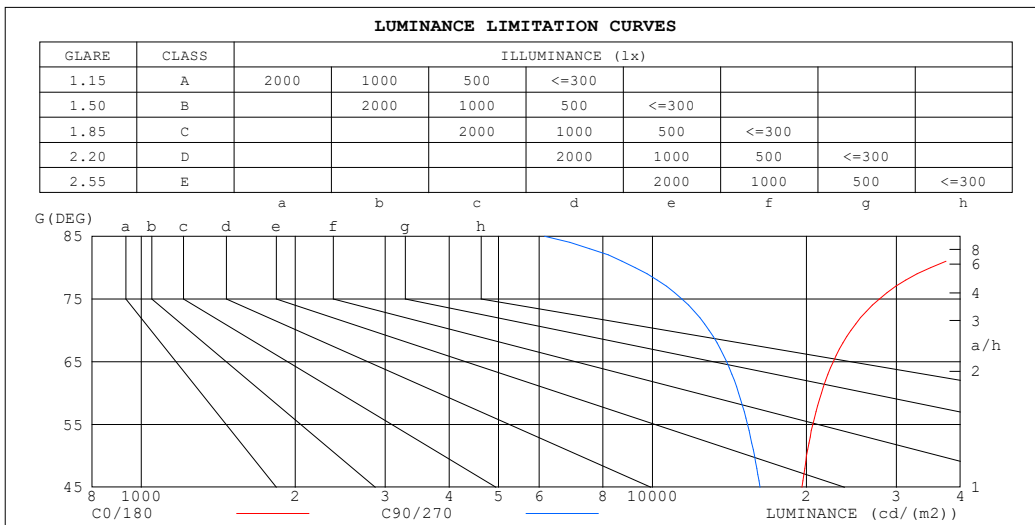


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.36V I:0.1471A P:33.862W PF:0.9579 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4941.89x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.96	.96	.96	.90	.90	.90	.87
1.0	.98	.93	.89	.95	.90	.86	.88	.84	.81	.82	.79	.76	.76	.73	.71	.68
2.0	.84	.77	.71	.81	.75	.69	.76	.70	.65	.70	.66	.62	.65	.62	.58	.55
3.0	.74	.65	.58	.71	.63	.57	.66	.59	.54	.61	.56	.51	.57	.53	.49	.46
4.0	.65	.56	.49	.63	.54	.47	.58	.51	.45	.54	.48	.43	.51	.46	.41	.39
5.0	.58	.48	.41	.56	.47	.41	.52	.45	.39	.49	.42	.37	.45	.40	.36	.33
6.0	.52	.43	.36	.50	.41	.35	.47	.39	.34	.44	.37	.32	.41	.35	.31	.29
7.0	.47	.38	.31	.45	.37	.31	.42	.35	.30	.40	.33	.29	.37	.32	.28	.25
8.0	.43	.34	.28	.41	.33	.27	.39	.32	.26	.36	.30	.25	.34	.29	.25	.22
9.0	.39	.31	.25	.38	.30	.25	.36	.29	.24	.34	.27	.23	.32	.26	.22	.20
10.0	.36	.28	.23	.35	.27	.22	.33	.26	.21	.31	.25	.21	.29	.24	.20	.18

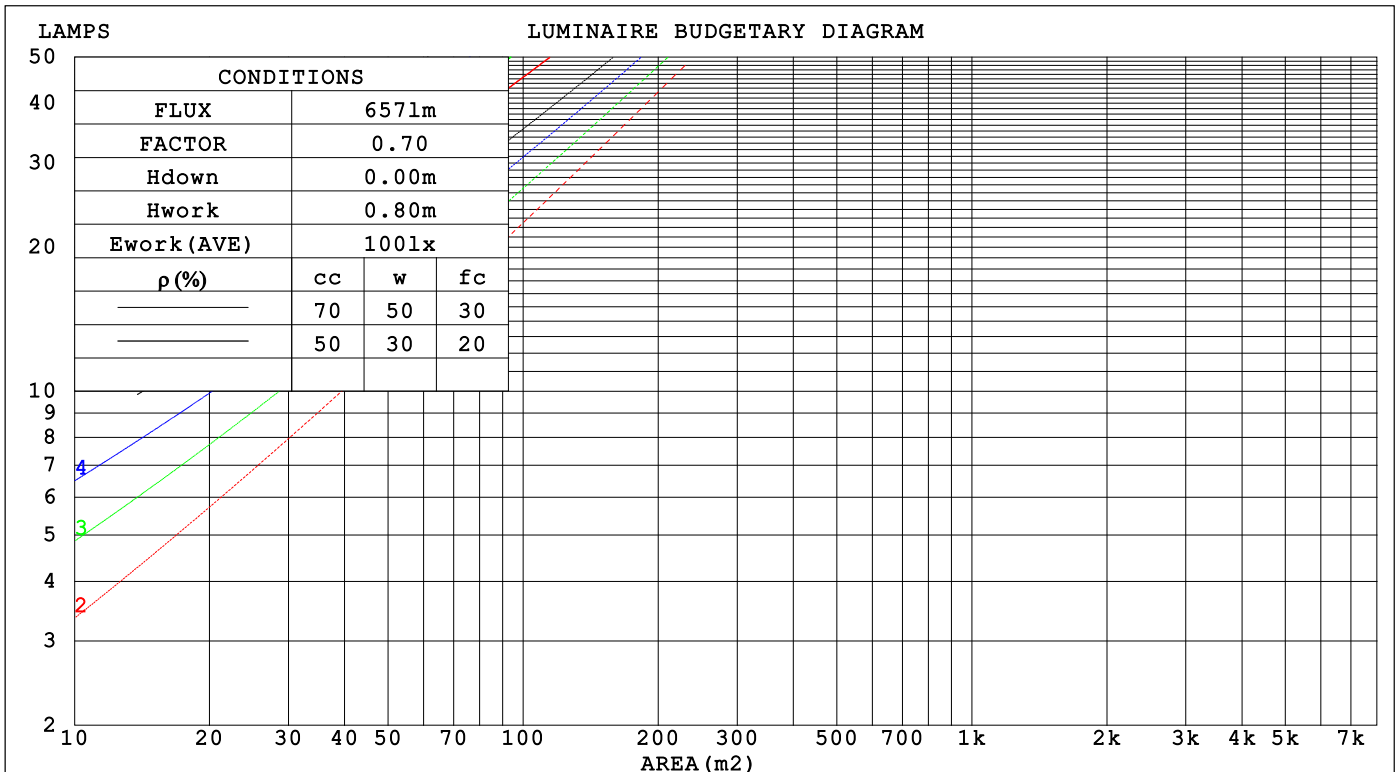

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.36V I:0.1471A P:33.862W PF:0.9579 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4941.89x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.358	.203	.064	.346	.197	.063	.325	.187	.060	.306	.176	.057	.288	.167	.054	
2.0	.318	.174	.053	.307	.169	.052	.288	.160	.050	.271	.152	.048	.255	.144	.045	
3.0	.286	.152	.046	.277	.148	.045	.260	.141	.043	.244	.134	.041	.229	.127	.039	
4.0	.260	.135	.040	.251	.132	.039	.236	.125	.037	.221	.119	.036	.208	.113	.034	
5.0	.237	.121	.035	.230	.118	.034	.216	.112	.033	.203	.107	.032	.191	.102	.031	
6.0	.218	.109	.031	.212	.107	.031	.199	.102	.030	.187	.097	.029	.176	.093	.027	
7.0	.202	.100	.028	.196	.098	.028	.184	.093	.027	.173	.089	.026	.163	.085	.025	
8.0	.188	.092	.026	.182	.090	.025	.172	.086	.024	.162	.082	.024	.152	.078	.023	
9.0	.175	.085	.024	.170	.083	.023	.161	.079	.022	.151	.076	.022	.143	.072	.021	
10.0	.164	.079	.022	.160	.077	.022	.151	.074	.021	.142	.071	.020	.134	.068	.019	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.293	.293	.293	.250	.250	.250	.171	.171	.171	.098	.098	.098	.031	.031	.031	
1.0	.287	.259	.234	.246	.222	.201	.168	.153	.139	.097	.089	.081	.031	.029	.026	
2.0	.280	.236	.199	.240	.203	.172	.164	.141	.120	.095	.082	.070	.030	.026	.023	
3.0	.272	.219	.177	.233	.189	.153	.160	.131	.107	.093	.077	.063	.030	.025	.021	
4.0	.265	.206	.162	.227	.178	.141	.156	.124	.099	.090	.073	.059	.029	.024	.019	
5.0	.257	.196	.152	.221	.170	.132	.152	.119	.093	.088	.070	.055	.028	.023	.018	
6.0	.250	.188	.144	.215	.163	.126	.148	.114	.089	.086	.067	.053	.028	.022	.017	
7.0	.243	.182	.139	.209	.157	.121	.144	.110	.086	.084	.065	.051	.027	.021	.017	
8.0	.236	.176	.135	.203	.153	.117	.141	.107	.083	.082	.063	.050	.026	.021	.016	
9.0	.230	.171	.132	.198	.149	.115	.137	.104	.081	.080	.062	.049	.026	.020	.016	
10.0	.224	.167	.129	.193	.145	.113	.134	.102	.080	.078	.060	.048	.025	.020	.016	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.36V I:0.1471A P:33.862W PF:0.9579 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4941.89x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.7	24.1	23.1	24.5	25.0	21.4	22.8	21.9	23.2	23.7
3H	24.9	26.2	25.4	26.6	27.2	22.8	24.1	23.3	24.6	25.1
4H	26.0	27.3	26.5	27.8	28.3	23.4	24.6	23.9	25.1	25.6
6H	27.3	28.4	27.8	28.9	29.5	23.7	24.9	24.3	25.4	26.0
8H	27.9	29.0	28.5	29.5	30.1	23.8	24.9	24.4	25.5	26.0
12H	28.7	29.8	29.2	30.3	30.9	23.8	24.9	24.4	25.4	26.0
4H 2H	23.2	24.5	23.7	24.9	25.5	22.3	23.5	22.8	24.0	24.5
3H	25.6	26.7	26.2	27.2	27.8	24.0	25.0	24.5	25.6	26.2
4H	26.9	27.9	27.5	28.5	29.1	24.7	25.7	25.3	26.2	26.8
6H	28.4	29.2	28.9	29.8	30.5	25.2	26.1	25.8	26.7	27.3
8H	29.1	29.9	29.7	30.5	31.2	25.4	26.2	26.0	26.8	27.5
12H	30.0	30.8	30.7	31.4	32.1	25.5	26.2	26.1	26.8	27.5
8H 4H	27.2	28.1	27.8	28.6	29.3	25.4	26.2	26.0	26.8	27.4
6H	28.9	29.6	29.5	30.2	30.9	26.2	26.9	26.8	27.5	28.2
8H	29.8	30.5	30.5	31.1	31.8	26.5	27.1	27.2	27.8	28.5
12H	31.0	31.5	31.7	32.2	32.9	26.8	27.3	27.4	27.9	28.7
12H 4H	27.3	28.0	27.9	28.6	29.3	25.5	26.3	26.1	26.9	27.6
6H	29.0	29.6	29.6	30.2	31.0	26.5	27.1	27.2	27.8	28.5
8H	30.0	30.6	30.7	31.2	32.0	27.0	27.5	27.6	28.2	28.9

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.1 / - 0.1	+ 0.1 / - 0.2
1.5H	+ 0.2 / - 0.2	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.5

CIE Pub.117, 4942 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.6)
Area: 0.070821 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.640m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.36V I:0.1471A P:33.862W PF:0.9579 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4941.89x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	51	39	31	50	38	31	48	37	31	24
0.80	60	48	40	59	47	39	56	46	39	31
1.00	68	56	48	66	55	47	63	55	46	38
1.25	75	63	55	73	62	54	69	60	53	44
1.50	80	69	61	78	67	60	73	64	58	48
2.00	87	77	69	85	75	68	79	72	66	55
2.50	92	82	75	89	80	73	83	76	70	59
3.00	95	87	80	92	84	78	86	80	75	62
4.00	100	92	87	96	90	84	90	85	80	67
5.00	102	96	91	99	93	88	92	88	84	70
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.36V I:0.1471A P:33.862W PF:0.9579 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4941.89x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

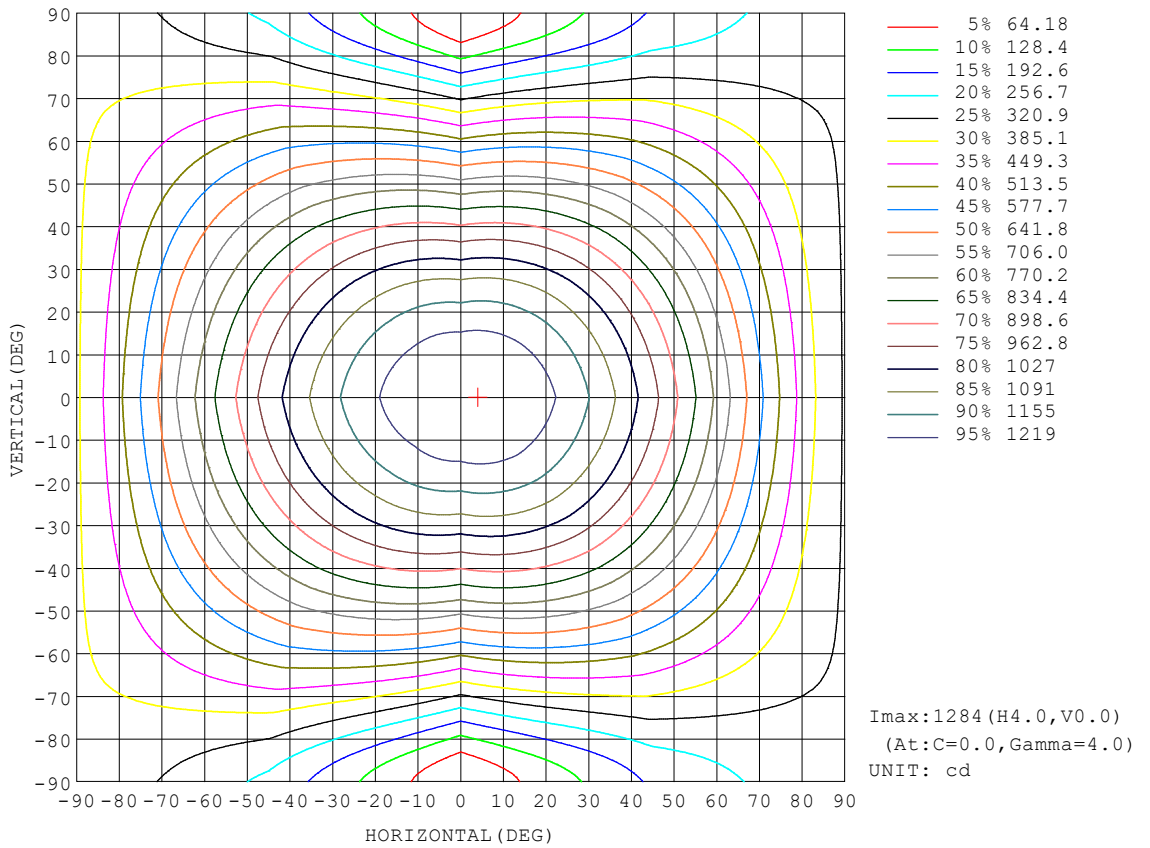


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.36V I:0.1471A P:33.862W PF:0.9579 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4941.89x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

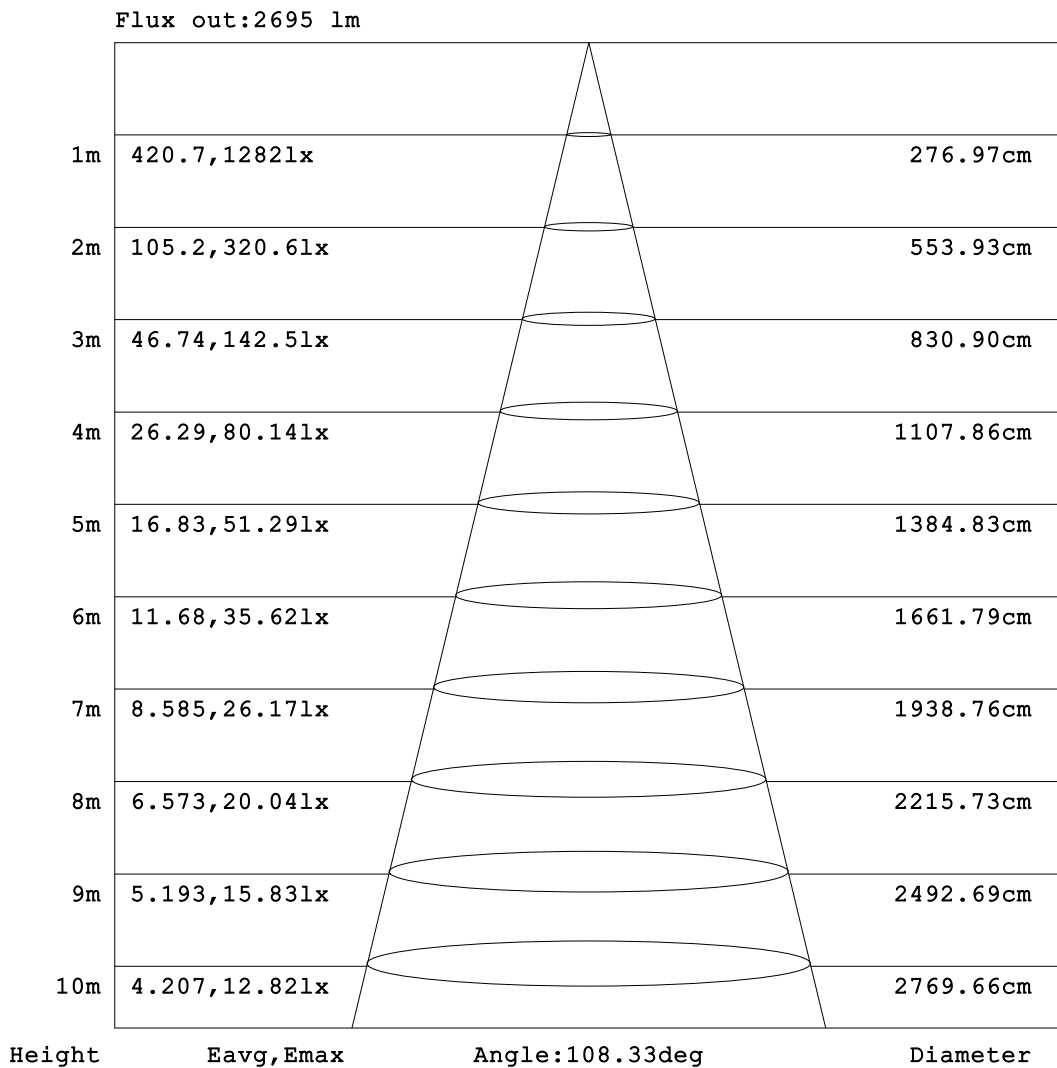


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.36V I:0.1471A P:33.862W PF:0.9579 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4941.89x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

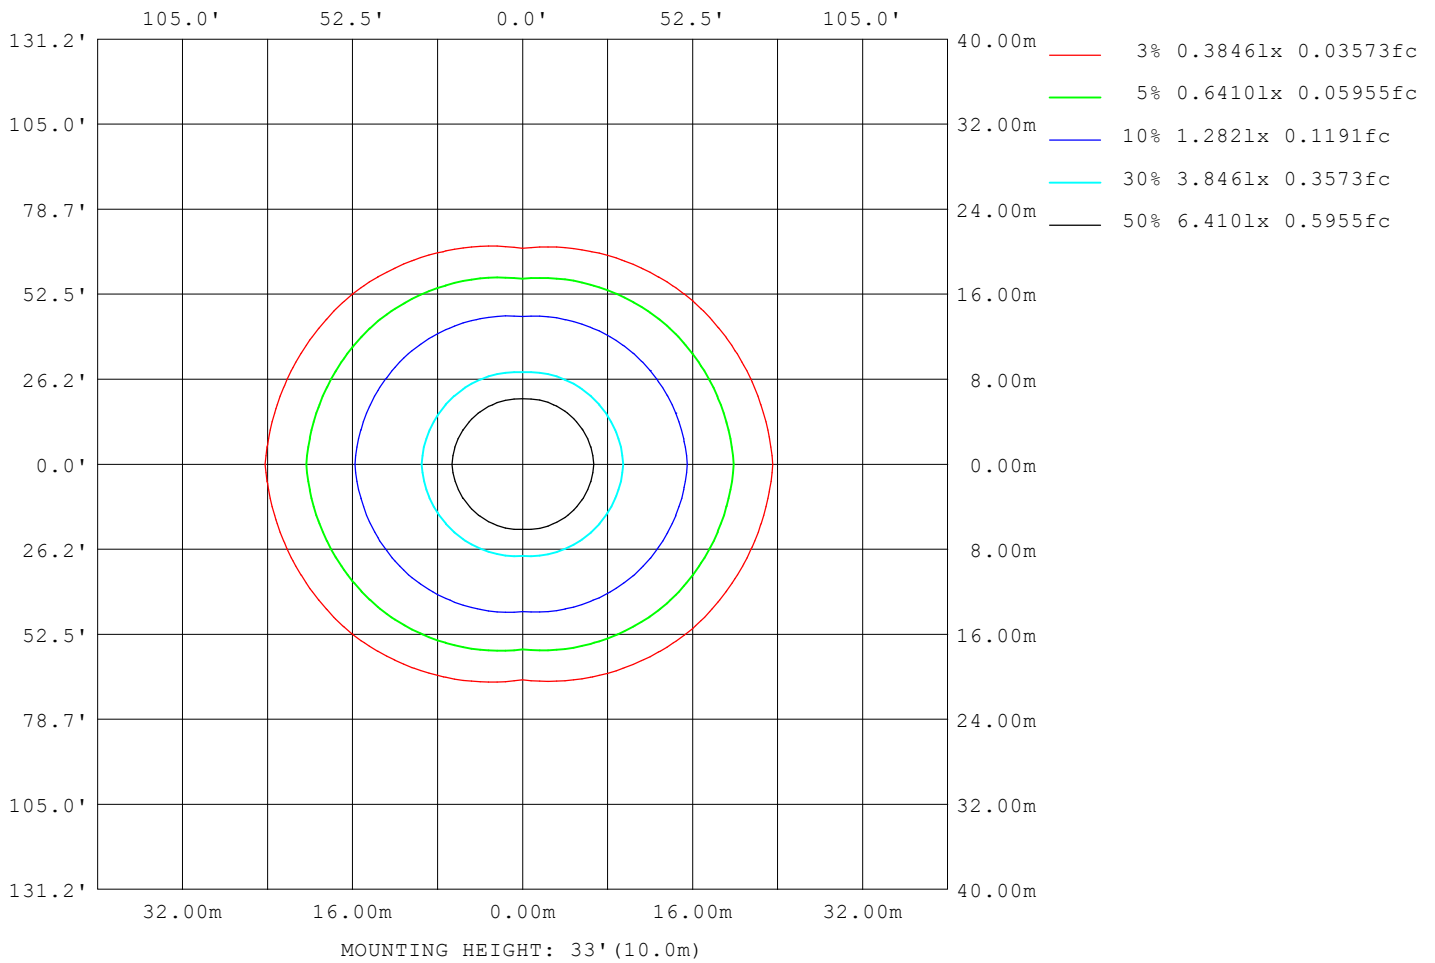

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.36V I:0.1471A P:33.862W PF:0.9579 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4941.89x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	23436
L_0~180 (75) av	29616
L_0~180 (85) av	64282
L_90~270 (65) av	13991
L_90~270 (75) av	11459
L_90~270 (85) av	6160
L_45 (65) av	19541
L_45 (75) av	22694
L_45 (85) av	43489

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

Planar Illuminance Curve

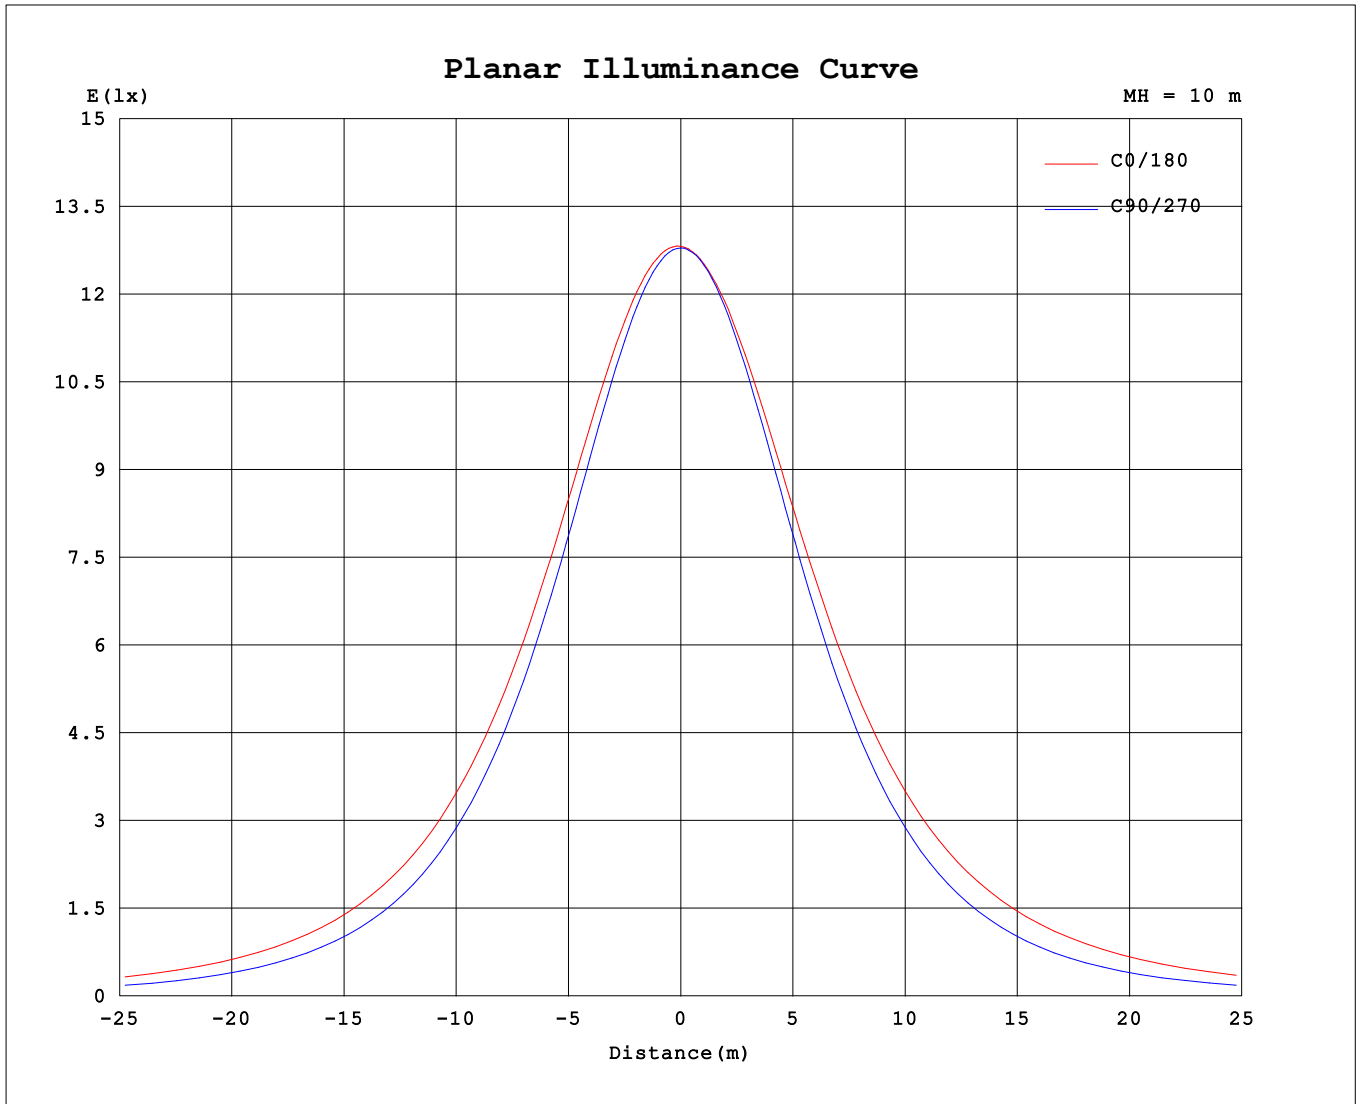

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.36V I:0.1471A P:33.862W PF:0.9579 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4941.89x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315											
0	1280	1280	1280	1280	1280	1280	1280	1280											
5	1281	1279	1272	1271	1272	1271	1274	1279											
10	1274	1266	1253	1253	1258	1253	1254	1267											
15	1257	1244	1220	1226	1238	1227	1222	1244											
20	1232	1210	1176	1191	1211	1192	1178	1210											
25	1198	1167	1120	1148	1177	1148	1123	1166											
30	1154	1114	1056	1097	1138	1098	1058	1113											
35	1104	1052	982	1040	1093	1041	985	1050											
40	1045	983	901	977	1044	978	904	981											
45	980	908	814	910	990	910	816	905											
50	910	828	721	837	931	837	723	825											
55	835	745	623	762	867	762	626	741											
60	756	658	522	684	800	684	524	654											
65	674	569	418	603	728	602	419	565											
70	591	481	313	521	654	520	314	477											
75	508	395	209	440	578	439	211	391											
80	429	314	114	362	502	361	115	310											
85	362	246	38.0	293	432	292	38.1	242											
90	316	203	2.53	242	377	243	2.41	200											
95	285	178	3.22	213	341	213	2.94	175											
100	257	157	4.79	189	309	189	4.88	153											
105	231	139	6.71	169	279	169	6.98	135											
110	207	122	8.75	151	251	151	9.27	120											
115	185	102	10.8	135	226	135	11.6	102											
120	164	88.0	12.8	121	202	121	13.9	87.5											
125	146	73.7	14.7	109	180	109	16.1	74.7											
130	128	62.3	16.5	98.2	159	98.2	18.2	63.1											
135	112	53.5	18.2	88.3	140	88.7	20.1	53.9											
140	97.1	46.1	19.7	79.2	122	79.6	21.9	46.7											
145	83.8	39.6	21.7	70.9	106	71.2	23.4	40.2											
150	71.2	34.2	25.0	63.3	90.2	63.7	25.6	34.8											
155	59.7	29.9	28.1	56.3	75.6	56.4	28.6	30.6											
160	49.5	28.4	30.9	49.6	61.4	49.4	31.7	28.2											
165	41.0	26.8	33.4	40.9	51.3	40.8	34.3	26.6											
170	32.6	25.7	35.5	35.8	39.5	35.4	36.4	25.6											
175	20.1	30.7	37.2	37.6	22.2	37.0	37.7	31.3											
180	24.1	38.0	38.4	38.1	24.1	38.0	38.5	38.0											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks: