
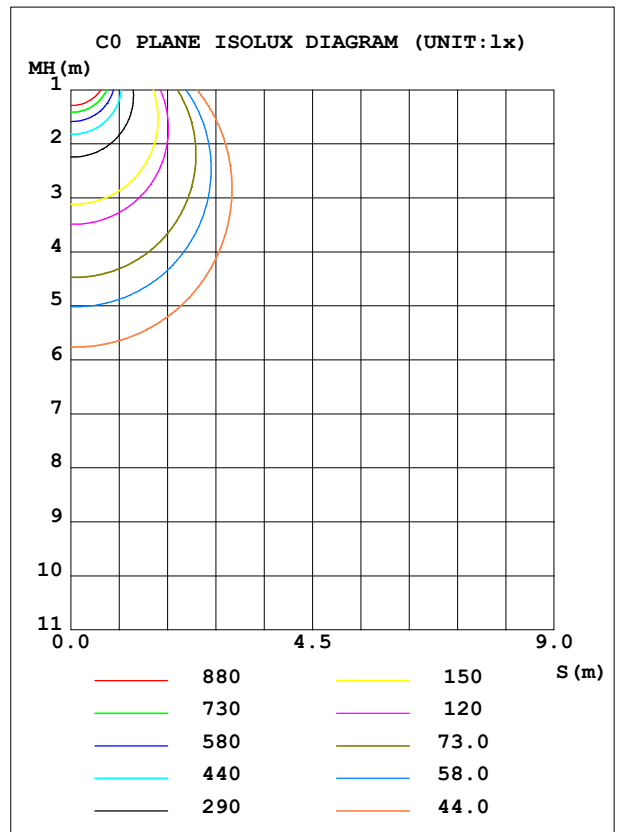


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.36V I:0.1698A P:39.257W PF:0.9616 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5627.77x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.06l	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	E-B40W	Imax (cd)	1460	S/MH (C0/180)	1.34
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	5627.8	η UP, DN (C0-180)	6.4, 43.0
NOMINAL FLUX (lm)	5627.77	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	7.0, 43.5
LAMPS INSIDE	1	η up (%)	13.5	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	240	η down (%)	86.5	CIBSE SHR MAX	1.50

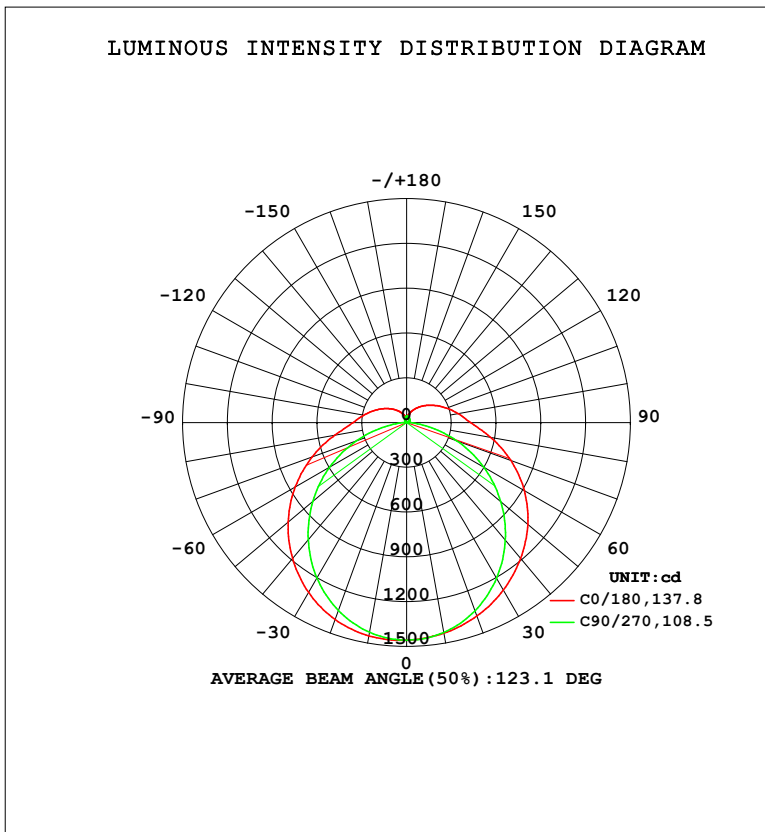

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1451	1442	1427	1427	1433	1427	1428	1442	0- 10	138.0	138.0	2.45,2.45
20	1403	1378	1339	1356	1378	1358	1341	1377	10- 20	397.0	535.0	9.51,9.51
30	1313	1268	1202	1249	1296	1251	1205	1266	20- 30	606.9	1142	20.3,20.3
40	1189	1119	1026	1113	1188	1114	1029	1117	30- 40	743.5	1885	33.5,33.5
50	1037	942.5	821.0	953.3	1060	954.1	823.9	939.6	40- 50	794.6	2680	47.6,47.6
60	861.1	749.2	594.2	778.6	911.4	779.3	597.1	744.9	50- 60	759.1	3439	61.1,61.1
70	673.9	547.8	356.4	593.5	744.2	593.2	357.8	543.1	60- 70	645.8	4085	72.6,72.6
80	488.9	358.2	129.7	412.3	571.4	411.6	130.6	353.1	70- 80	477.6	4563	81.1,81.1
90	359.8	230.6	2.873	275.7	429.7	276.8	2.731	227.1	80- 90	307.3	4870	86.5,86.5
100	292.5	178.5	5.455	214.9	351.7	216.1	5.568	174.9	90-100	219.8	5090	90.4,90.4
110	235.8	139.2	9.965	171.5	286.6	171.9	10.56	136.7	100-110	171.5	5261	93.5,93.5
120	187.1	100.2	14.57	138.0	229.9	138.2	15.87	99.18	110-120	129.2	5390	95.8,95.8
130	145.7	70.93	18.80	111.9	181.4	112.0	20.71	71.78	120-130	92.66	5483	97.4,97.4
140	110.7	52.46	22.45	90.18	139.4	90.64	24.89	53.08	130-140	63.72	5547	98.6,98.6
150	81.04	38.92	28.46	72.07	102.7	72.59	29.12	39.59	140-150	41.14	5588	99.3,99.3
160	56.48	32.42	35.15	56.37	70.19	56.26	36.00	32.05	150-160	24.31	5612	99.7,99.7
170	37.15	29.30	40.41	40.70	45.01	40.35	41.38	29.17	160-170	12.09	5624	99.9,99.9
180	27.40	43.26	43.71	43.34	27.45	43.29	43.75	43.31	170-180	3.451	5628	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2281.9 lm

%lum = 40.5%

%lamp = 40.5%

Conical surface Flux(120deg): 3439.2 lm

%lum = 61.1%


%lamp = 61.1%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.36V I:0.1698A P:39.257W PF:0.9616 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5627.77x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

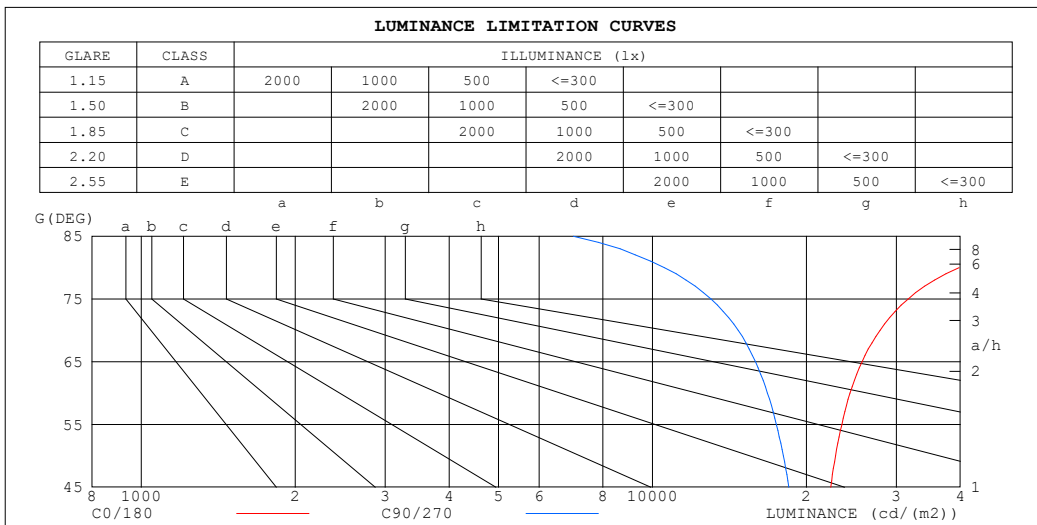

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	66843	7001
80	39811	10541
75	31643	13012
70	27864	14711
65	25699	15909
60	24355	16777
55	23464	17474
50	22803	18029
45	22316	18487


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.36V I:0.1698A P:39.257W PF:0.9616 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5627.77x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.96	.96	.96	.90	.90	.90	.87
1.0	.98	.93	.89	.95	.90	.86	.88	.84	.81	.82	.79	.76	.76	.73	.71	.68
2.0	.84	.77	.71	.81	.75	.69	.76	.70	.65	.70	.66	.62	.65	.62	.58	.55
3.0	.74	.65	.58	.71	.63	.57	.66	.59	.54	.61	.56	.51	.57	.53	.49	.46
4.0	.65	.56	.49	.63	.54	.47	.58	.51	.45	.54	.48	.43	.51	.46	.41	.39
5.0	.58	.48	.41	.56	.47	.41	.52	.45	.39	.49	.42	.37	.45	.40	.36	.33
6.0	.52	.43	.36	.50	.41	.35	.47	.39	.34	.44	.37	.32	.41	.35	.31	.29
7.0	.47	.38	.31	.45	.37	.31	.42	.35	.30	.40	.33	.29	.37	.32	.28	.25
8.0	.43	.34	.28	.41	.33	.27	.39	.32	.26	.36	.30	.25	.34	.29	.25	.22
9.0	.39	.31	.25	.38	.30	.25	.36	.29	.24	.34	.27	.23	.32	.26	.22	.20
10.0	.36	.28	.23	.35	.27	.22	.33	.26	.21	.31	.25	.21	.29	.24	.20	.18

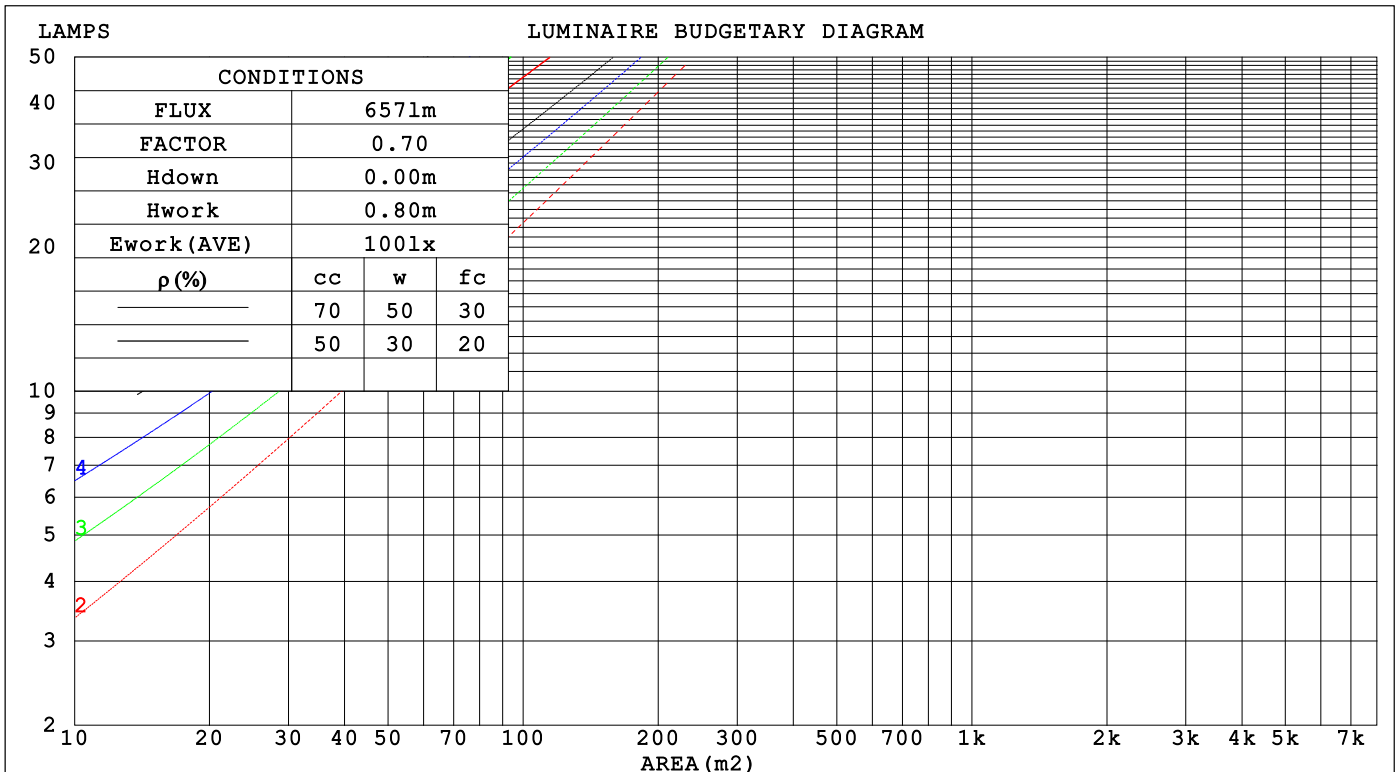

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.36V I:0.1698A P:39.257W PF:0.9616 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5627.77x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.358	.203	.064	.346	.197	.063	.325	.187	.060	.306	.176	.057	.288	.167	.054	
2.0	.318	.174	.053	.307	.169	.052	.288	.160	.050	.271	.152	.048	.255	.144	.045	
3.0	.286	.152	.046	.277	.148	.045	.260	.141	.043	.244	.134	.041	.229	.127	.039	
4.0	.260	.135	.040	.251	.132	.039	.236	.125	.037	.221	.119	.036	.208	.113	.034	
5.0	.237	.121	.035	.230	.118	.034	.216	.112	.033	.203	.107	.032	.191	.102	.031	
6.0	.218	.109	.031	.212	.107	.031	.199	.102	.030	.187	.097	.029	.176	.093	.027	
7.0	.202	.100	.028	.196	.098	.028	.184	.093	.027	.173	.089	.026	.163	.085	.025	
8.0	.188	.092	.026	.182	.090	.025	.172	.086	.024	.162	.082	.024	.152	.078	.023	
9.0	.175	.085	.024	.170	.083	.023	.161	.079	.022	.151	.076	.022	.143	.072	.021	
10.0	.164	.079	.022	.160	.077	.022	.151	.074	.021	.142	.071	.020	.134	.068	.019	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.293	.293	.293	.250	.250	.250	.171	.171	.171	.098	.098	.098	.031	.031	.031	
1.0	.287	.259	.234	.246	.222	.201	.168	.153	.139	.097	.089	.081	.031	.029	.026	
2.0	.280	.236	.199	.240	.203	.172	.164	.141	.120	.095	.082	.070	.030	.026	.023	
3.0	.272	.219	.177	.233	.189	.153	.160	.131	.107	.093	.077	.063	.030	.025	.021	
4.0	.265	.206	.162	.227	.178	.141	.156	.124	.099	.090	.073	.059	.029	.024	.019	
5.0	.257	.196	.152	.221	.170	.132	.152	.119	.093	.088	.070	.055	.028	.023	.018	
6.0	.250	.188	.144	.215	.163	.126	.148	.114	.089	.086	.067	.053	.028	.022	.017	
7.0	.243	.182	.139	.209	.157	.121	.144	.110	.086	.084	.065	.051	.027	.021	.017	
8.0	.236	.176	.135	.203	.153	.117	.141	.107	.083	.082	.063	.050	.026	.021	.016	
9.0	.230	.171	.132	.198	.149	.115	.137	.104	.081	.080	.062	.049	.026	.020	.016	
10.0	.224	.167	.129	.193	.145	.113	.134	.102	.080	.078	.060	.048	.025	.020	.016	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.36V I:0.1698A P:39.257W PF:0.9616 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5627.77x1 lm										
NAME: E-B40W			TYPE: 40W			WEIGHT:				
SPEC.: 3000K			DIM.:			SERIAL No.:				
MFR.: EVERFINE			SUR.: 1.161*0.061			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.1	24.5	23.6	25.0	25.4	21.9	23.3	22.3	23.7	24.2
3H	25.3	26.6	25.8	27.1	27.6	23.3	24.6	23.8	25.1	25.6
4H	26.5	27.7	27.0	28.2	28.7	23.8	25.1	24.3	25.6	26.1
6H	27.7	28.9	28.2	29.4	29.9	24.2	25.3	24.7	25.8	26.4
8H	28.4	29.5	28.9	30.0	30.6	24.3	25.4	24.8	25.9	26.5
12H	29.1	30.2	29.7	30.7	31.3	24.3	25.4	24.8	25.9	26.5
4H 2H	23.7	24.9	24.2	25.4	25.9	22.7	24.0	23.2	24.4	25.0
3H	26.1	27.2	26.6	27.7	28.3	24.4	25.5	25.0	26.0	26.6
4H	27.4	28.4	28.0	28.9	29.5	25.1	26.1	25.7	26.7	27.3
6H	28.8	29.7	29.4	30.3	30.9	25.7	26.5	26.3	27.1	27.8
8H	29.6	30.4	30.2	31.0	31.7	25.8	26.6	26.4	27.2	27.9
12H	30.5	31.2	31.1	31.8	32.5	25.9	26.7	26.5	27.3	28.0
8H 4H	27.7	28.5	28.3	29.1	29.8	25.8	26.6	26.4	27.2	27.9
6H	29.3	30.0	30.0	30.7	31.4	26.6	27.3	27.3	27.9	28.7
8H	30.3	30.9	30.9	31.6	32.3	27.0	27.6	27.6	28.2	29.0
12H	31.4	32.0	32.1	32.6	33.4	27.2	27.7	27.9	28.4	29.2
12H 4H	27.7	28.5	28.3	29.1	29.8	26.0	26.7	26.6	27.3	28.0
6H	29.4	30.1	30.1	30.7	31.4	27.0	27.6	27.6	28.2	29.0
8H	30.5	31.0	31.2	31.7	32.4	27.4	28.0	28.1	28.6	29.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.5				

CIE Pub.117, 5628 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 6.0)
 Area: 0.070821 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.36V I:0.1698A P:39.257W PF:0.9616 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5627.77x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	51	39	31	50	38	31	48	37	31	24
0.80	60	48	40	59	47	39	56	46	39	31
1.00	68	56	48	66	55	47	63	55	46	38
1.25	75	63	55	73	62	54	69	60	53	44
1.50	80	69	61	78	67	60	73	64	58	48
2.00	87	77	69	85	75	68	79	72	66	55
2.50	92	82	75	89	80	73	83	76	70	59
3.00	95	87	80	92	84	78	86	80	75	62
4.00	100	92	87	96	90	84	90	85	80	67
5.00	102	96	91	99	93	88	92	88	84	70
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.36V I:0.1698A P:39.257W PF:0.9616 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5627.77x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

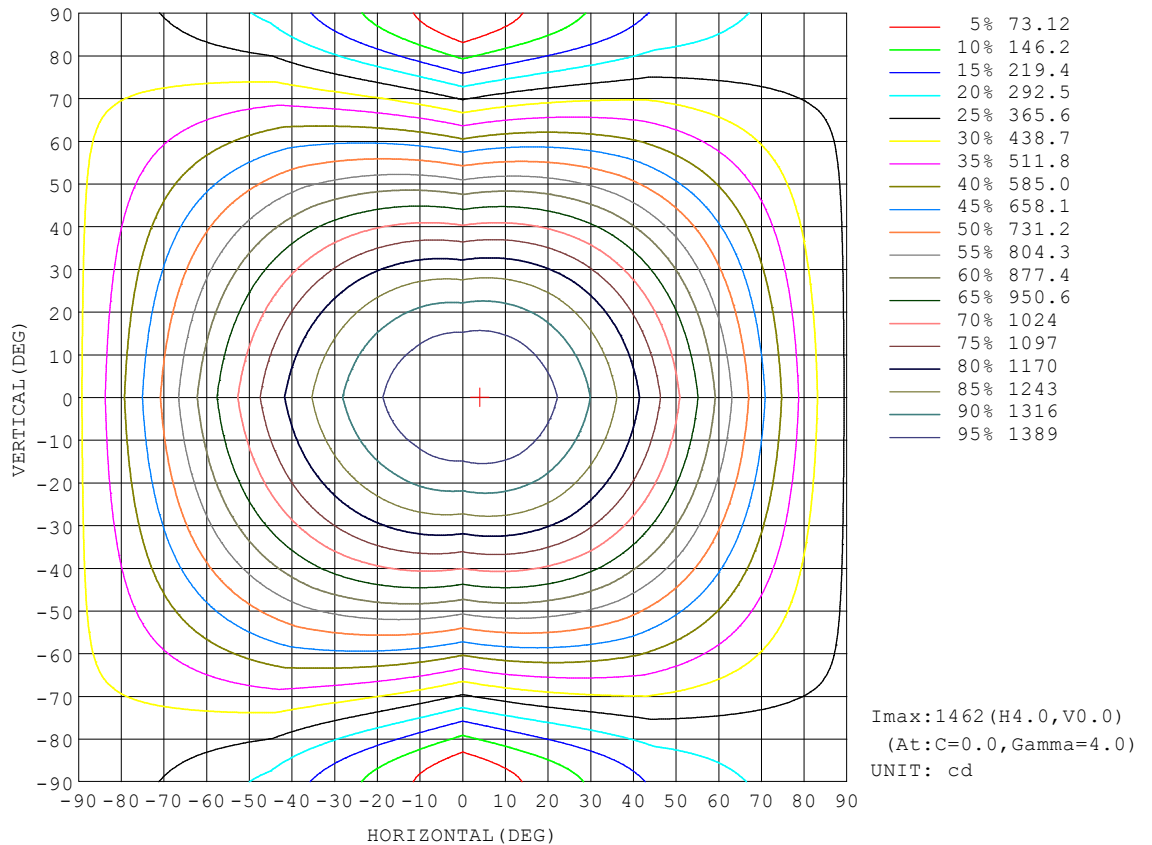


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.36V I:0.1698A P:39.257W PF:0.9616 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5627.77x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

Flux out:3069 lm

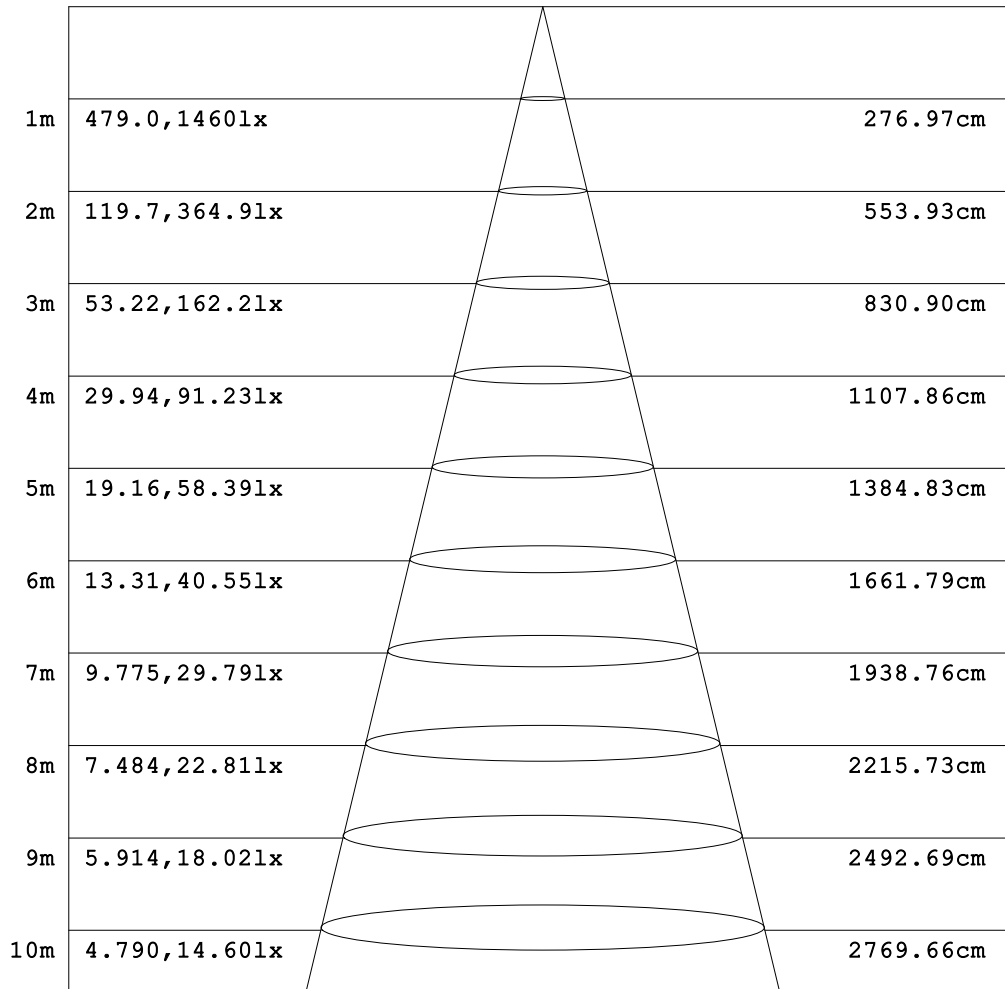

Height Eavg, Emax Angle:108.33deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.36V I:0.1698A P:39.257W PF:0.9616 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5627.77x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

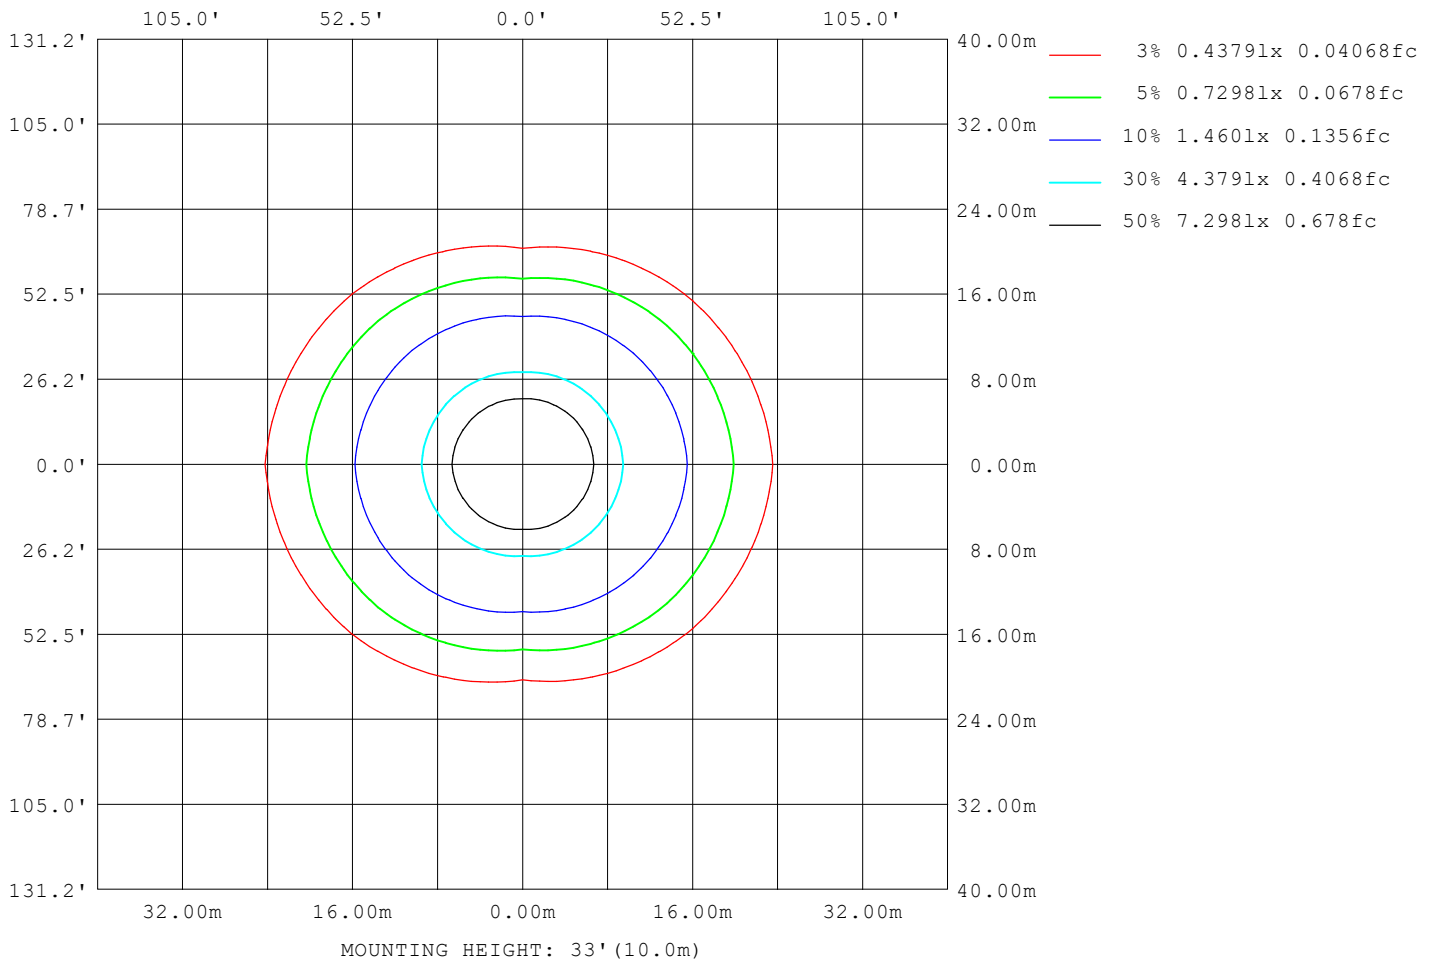

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.36V I:0.1698A P:39.257W PF:0.9616 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5627.77x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	26685
L_0~180 (75) av	33739
L_0~180 (85) av	73256
L_90~270 (65) av	15947
L_90~270 (75) av	13043
L_90~270 (85) av	7023
L_45 (65) av	22262
L_45 (75) av	25850
L_45 (85) av	49546

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

Planar Illuminance Curve

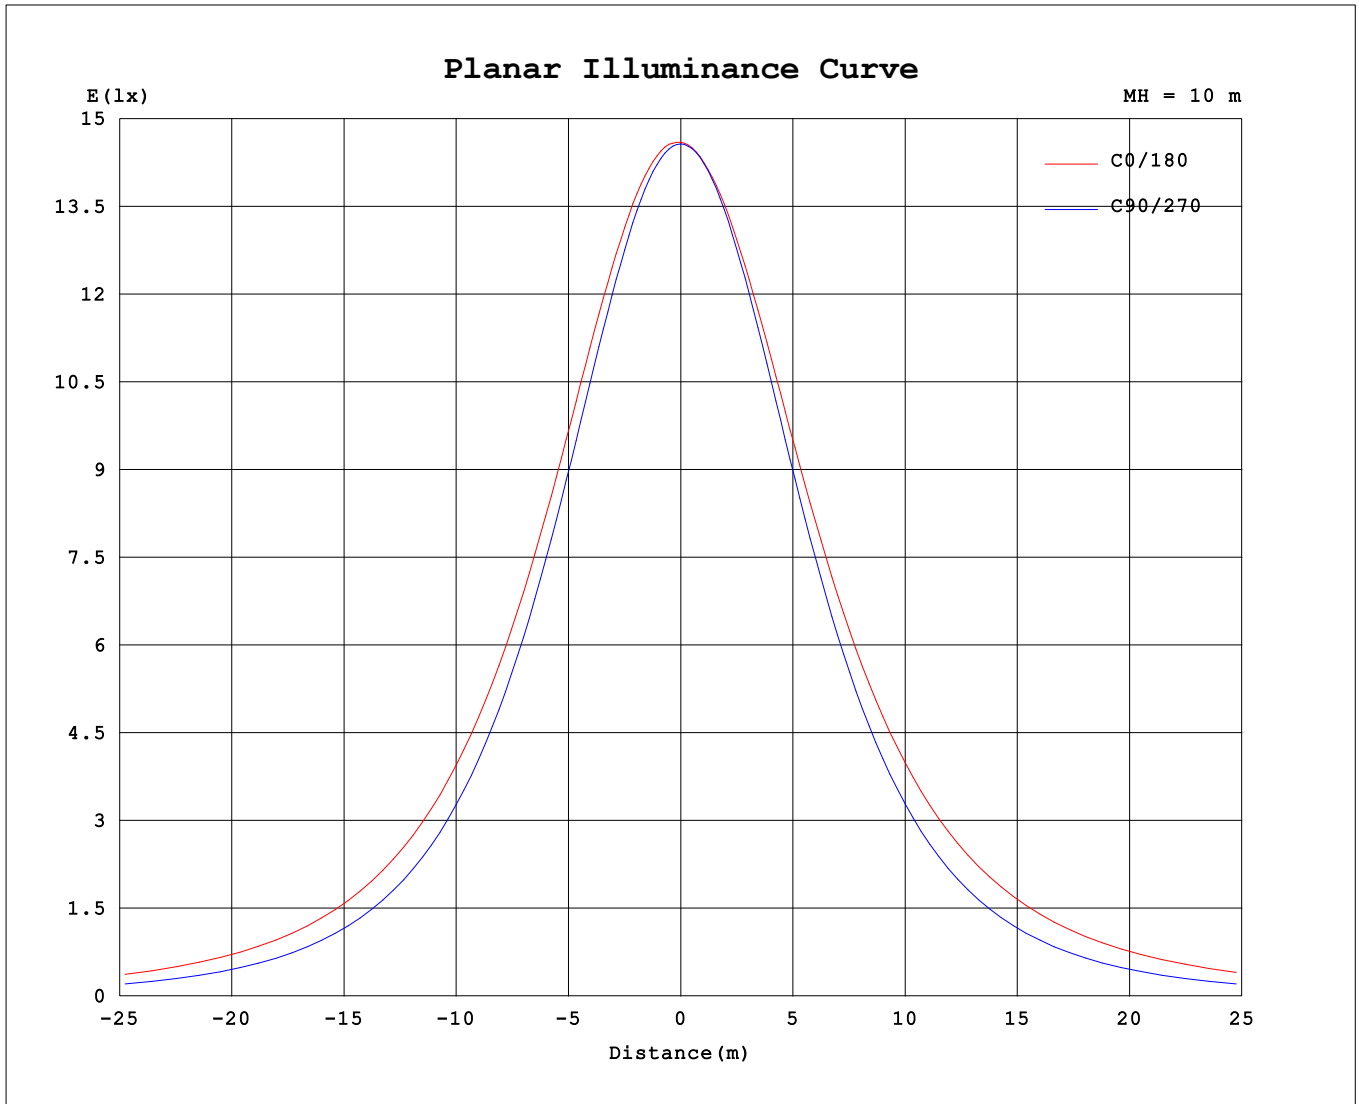

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.36V I:0.1698A P:39.257W PF:0.9616 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5627.77x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315										
0	1457	1457	1457	1457	1457	1457	1457	1457										
5	1460	1456	1449	1447	1449	1448	1450	1455										
10	1451	1442	1427	1427	1433	1427	1428	1442										
15	1432	1417	1389	1397	1409	1397	1391	1416										
20	1403	1378	1339	1356	1378	1358	1341	1377										
25	1364	1328	1276	1307	1341	1308	1279	1327										
30	1313	1268	1202	1249	1296	1251	1205	1266										
35	1255	1198	1118	1184	1245	1185	1121	1196										
40	1189	1119	1026	1113	1188	1114	1029	1117										
45	1116	1034	926	1036	1127	1036	930	1031										
50	1037	943	821	953	1060	954	824	940										
55	952	848	710	867	988	868	713	844										
60	861	749	594	779	911	779	597	745										
65	768	648	476	687	829	687	478	644										
70	674	548	356	593	744	593	358	543										
75	579	450	239	501	658	500	240	445										
80	489	358	130	412	571	412	131	353										
85	412	280	43.2	333	492	333	43.5	276										
90	360	231	2.87	276	430	277	2.73	227										
95	325	202	3.67	242	388	243	3.35	199										
100	292	178	5.46	215	352	216	5.57	175										
105	263	158	7.66	191	318	192	7.94	154										
110	236	139	9.97	172	287	172	10.6	137										
115	211	117	12.3	154	257	154	13.2	116										
120	187	100	14.6	138	230	138	15.9	99.2										
125	165	83.9	16.7	124	204	124	18.4	85.0										
130	146	70.9	18.8	112	181	112	20.7	71.8										
135	127	60.9	20.7	101	160	101	22.9	61.3										
140	111	52.5	22.4	90.2	139	90.6	24.9	53.1										
145	95.2	45.1	24.7	80.7	120	81.2	26.7	45.7										
150	81.0	38.9	28.5	72.1	103	72.6	29.1	39.6										
155	68.0	34.1	32.0	64.1	86.1	64.2	32.5	34.9										
160	56.5	32.4	35.1	56.4	70.2	56.3	36.0	32.0										
165	46.8	30.5	38.0	46.6	58.2	46.5	39.1	30.3										
170	37.2	29.3	40.4	40.7	45.0	40.3	41.4	29.2										
175	22.9	35.0	42.3	42.8	25.3	42.2	42.9	35.8										
180	27.4	43.3	43.7	43.3	27.5	43.3	43.7	43.3										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks: