
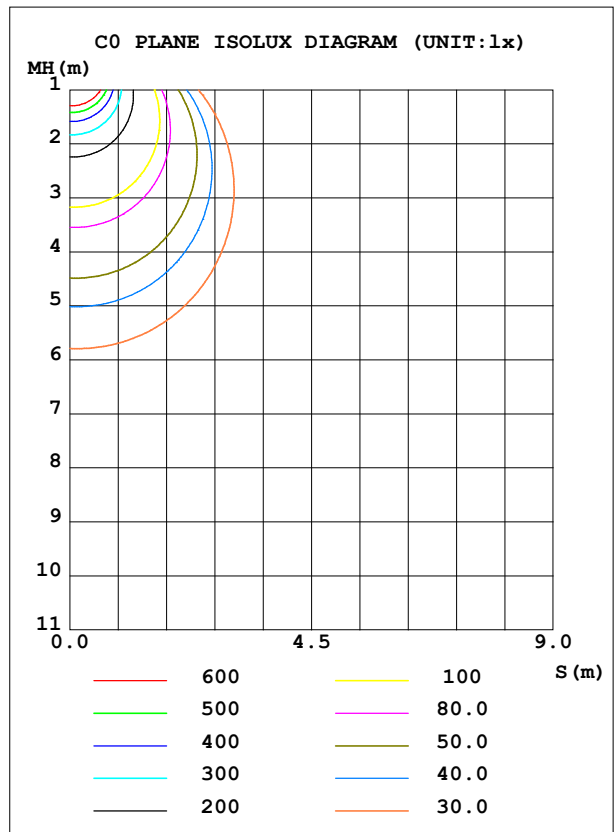


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.37V I:0.1073A P:24.350W PF:0.9439 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3872.9x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.06l	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	E-B40W	Imax (cd)	1012	S/MH (C0/180)	1.36
NOMINAL POWER (W)	25	LOR (%)	100.0	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	3872.9	η UP, DN (C0-180)	6.6,43.5
NOMINAL FLUX (lm)	3872.9	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	6.8,43.0
LAMPS INSIDE	1	η up (%)	13.4	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	240	η down (%)	86.6	CIBSE SHR MAX	1.50

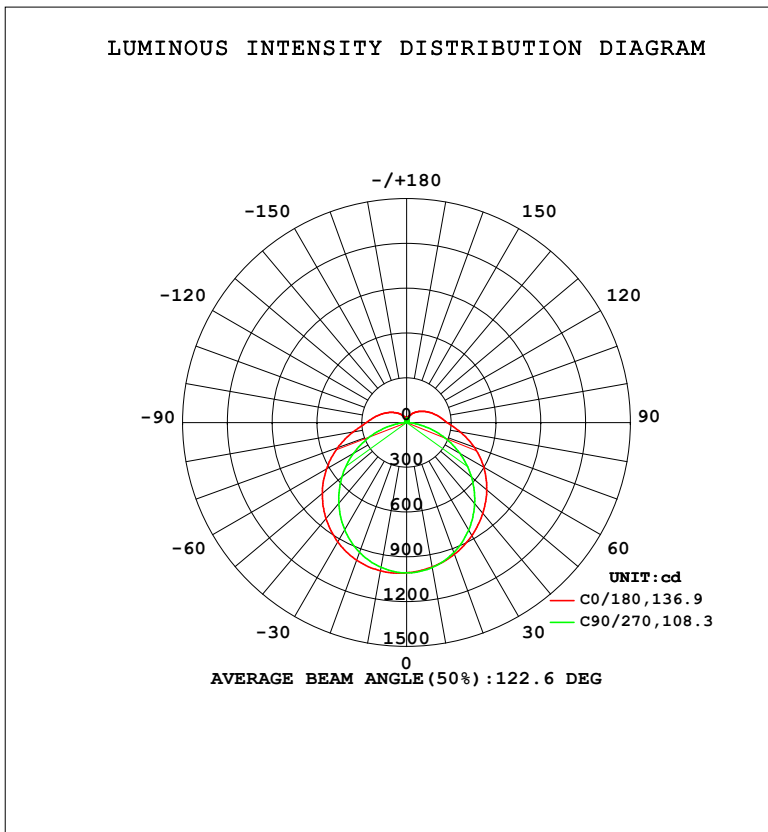

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1009	1001	985.5	981.1	982.6	980.8	986.5	1001	0- 10	95.34	95.34	2.46,2.46
20	981.1	960.5	924.7	927.2	938.5	927.2	926.2	960.3	10- 20	274.1	369.5	9.54,9.54
30	923.2	887.6	830.0	848.3	875.2	848.4	831.8	886.7	20- 30	418.7	788.2	20.4,20.4
40	840.5	788.1	707.7	749.2	794.2	749.3	709.8	785.8	30- 40	512.3	1301	33.6,33.6
50	737.9	668.5	566.0	636.2	701.5	636.1	567.9	665.9	40- 50	546.8	1847	47.7,47.7
60	619.6	536.7	409.9	514.0	596.6	513.5	411.0	533.3	50- 60	521.8	2369	61.2,61.2
70	491.2	399.0	245.5	386.1	482.1	385.0	245.7	395.1	60- 70	443.8	2813	72.6,72.6
80	363.7	267.6	90.01	263.1	365.0	262.1	89.58	263.5	70- 80	328.2	3141	81.1,81.1
90	270.2	176.6	1.965	175.0	272.1	174.2	1.835	172.8	80- 90	211.4	3352	86.6,86.6
100	218.2	134.3	3.754	137.4	224.7	137.6	3.790	131.6	90-100	151.3	3504	90.5,90.5
110	174.2	103.3	6.824	110.7	184.9	110.9	7.211	101.4	100-110	118.0	3622	93.5,93.5
120	137.2	73.35	9.982	90.07	149.9	90.49	10.85	72.84	110-120	88.76	3711	95.8,95.8
130	106.0	51.30	12.92	73.64	118.8	73.94	14.16	51.79	120-130	63.57	3774	97.4,97.4
140	80.06	37.51	15.44	59.77	91.70	60.04	17.00	37.78	130-140	43.60	3818	98.6,98.6
150	57.95	27.47	19.53	48.09	65.87	48.38	19.87	27.86	140-150	28.07	3846	99.3,99.3
160	39.86	22.64	24.12	37.99	47.47	36.93	24.52	22.27	150-160	16.46	3862	99.7,99.7
170	25.95	20.32	27.69	27.58	30.19	27.23	28.26	20.24	160-170	8.285	3871	99.9,99.9
180	18.87	29.53	29.94	29.70	18.88	29.58	29.96	29.69	170-180	2.362	3873	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1573.4 lm

%lum = 40.6%

%lamp = 40.6%

Conical surface Flux(120deg): 2369.1 lm

%lum = 61.2%


%lamp = 61.2%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.37V I:0.1073A P:24.350W PF:0.9439 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3872.9x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

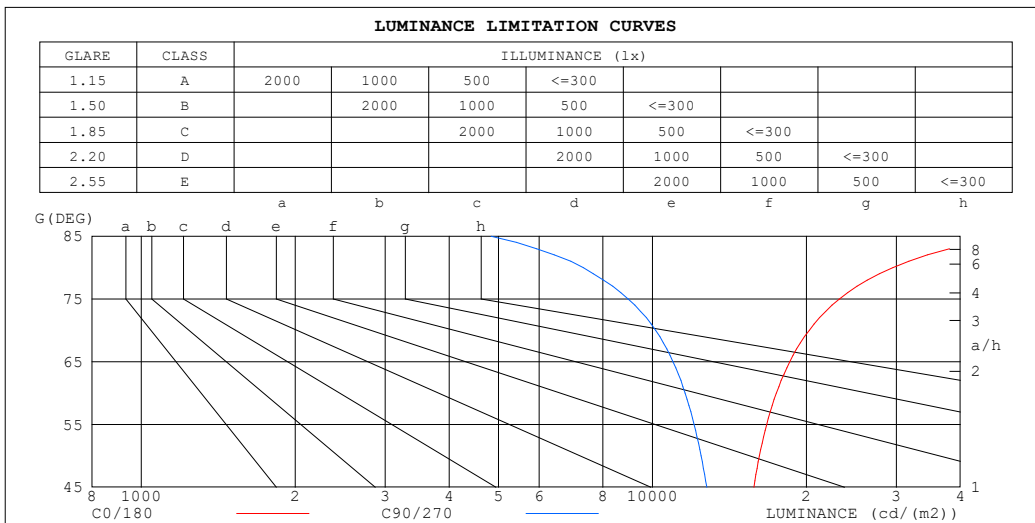

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	49973	4837
80	29535	7324
75	23221	8964
70	20253	10142
65	18566	10973
60	17477	11582
55	16727	12060
50	16189	12442
45	15786	12774


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.37V I:0.1073A P:24.350W PF:0.9439 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3872.9x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.96	.96	.96	.90	.90	.90	.87
1.0	.98	.93	.89	.95	.90	.86	.88	.84	.81	.82	.79	.76	.76	.74	.71	.68
2.0	.85	.77	.71	.81	.75	.69	.76	.70	.65	.70	.66	.62	.65	.62	.58	.55
3.0	.74	.65	.58	.71	.63	.57	.66	.59	.54	.61	.56	.51	.57	.53	.49	.46
4.0	.65	.56	.49	.63	.54	.48	.58	.51	.45	.54	.48	.43	.51	.46	.41	.39
5.0	.58	.48	.41	.56	.47	.41	.52	.45	.39	.49	.42	.37	.45	.40	.36	.33
6.0	.52	.43	.36	.50	.41	.35	.47	.39	.34	.44	.37	.33	.41	.36	.31	.29
7.0	.47	.38	.32	.45	.37	.31	.43	.35	.30	.40	.33	.29	.37	.32	.28	.25
8.0	.43	.34	.28	.41	.33	.27	.39	.32	.26	.37	.30	.26	.34	.29	.25	.22
9.0	.39	.31	.25	.38	.30	.25	.36	.29	.24	.34	.27	.23	.32	.26	.22	.20
10.0	.36	.28	.23	.35	.27	.22	.33	.26	.21	.31	.25	.21	.29	.24	.20	.18

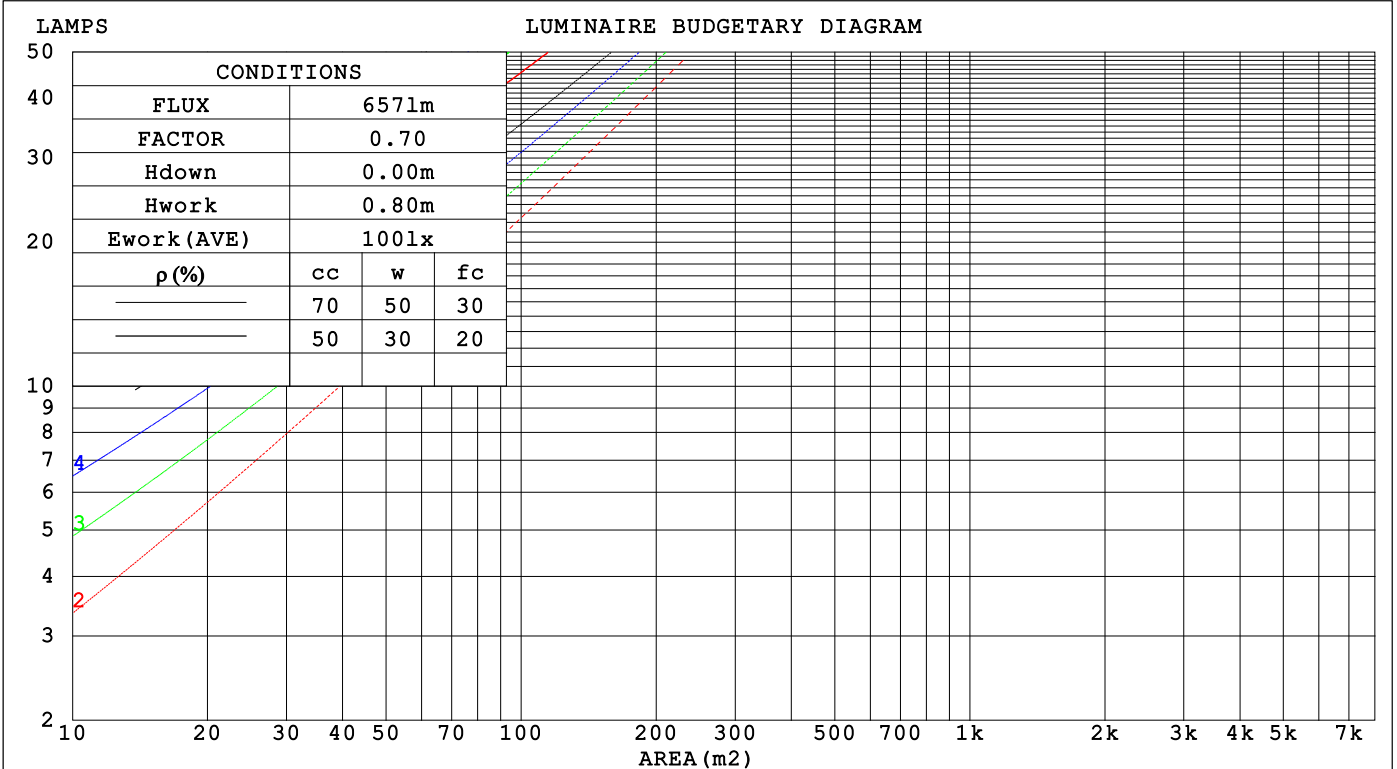

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.37V I:0.1073A P:24.350W PF:0.9439 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3872.9x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.357	.203	.064	.346	.197	.063	.325	.186	.060	.306	.176	.057	.288	.167	.054	
2.0	.317	.174	.053	.307	.169	.052	.288	.160	.050	.271	.152	.048	.255	.144	.045	
3.0	.286	.152	.046	.277	.148	.045	.260	.141	.043	.244	.134	.041	.229	.127	.039	
4.0	.259	.135	.040	.251	.131	.039	.236	.125	.037	.221	.119	.036	.208	.113	.034	
5.0	.237	.121	.035	.230	.118	.034	.216	.112	.033	.203	.107	.032	.191	.102	.031	
6.0	.218	.109	.031	.212	.107	.031	.199	.102	.030	.187	.097	.029	.176	.093	.027	
7.0	.202	.100	.028	.196	.098	.028	.184	.093	.027	.173	.089	.026	.163	.085	.025	
8.0	.188	.092	.026	.182	.090	.025	.172	.086	.024	.162	.082	.024	.152	.078	.023	
9.0	.175	.085	.024	.170	.083	.023	.160	.079	.022	.151	.076	.022	.143	.072	.021	
10.0	.164	.079	.022	.160	.077	.022	.151	.074	.021	.142	.071	.020	.134	.068	.019	

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.293	.293	.293	.250	.250	.250	.171	.171	.171	.098	.098	.098	.031	.031	.031	
2.0	.287	.259	.234	.245	.222	.201	.168	.153	.139	.097	.088	.081	.031	.028	.026	
3.0	.280	.236	.199	.239	.203	.172	.164	.140	.120	.095	.082	.070	.030	.026	.023	
4.0	.272	.219	.177	.233	.189	.153	.160	.131	.107	.092	.077	.063	.030	.025	.021	
5.0	.264	.206	.162	.227	.178	.140	.156	.124	.099	.090	.073	.059	.029	.024	.019	
6.0	.257	.196	.151	.220	.170	.132	.152	.119	.093	.088	.070	.055	.028	.023	.018	
7.0	.249	.188	.144	.214	.163	.125	.148	.114	.089	.086	.067	.053	.028	.022	.017	
8.0	.242	.181	.139	.209	.157	.121	.144	.110	.086	.084	.065	.051	.027	.021	.017	
9.0	.236	.176	.135	.203	.152	.117	.140	.107	.083	.082	.063	.050	.026	.021	.016	
10.0	.230	.171	.131	.198	.148	.115	.137	.104	.081	.080	.062	.049	.026	.020	.016	
10.0	.224	.167	.129	.193	.145	.112	.134	.102	.080	.078	.060	.048	.025	.020	.016	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.37V I:0.1073A P:24.350W PF:0.9439 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3872.9x1 lm										
NAME: E-B40W				TYPE: 25W				WEIGHT:		
SPEC.: 4000K				DIM.:				SERIAL No.:		
MFR.: EVERFINE				SUR.: 1.161*0.061				Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.1	23.5	22.6	23.9	24.4	20.7	22.1	21.1	22.5	23.0
3H	24.4	25.7	24.8	26.1	26.6	22.1	23.4	22.6	23.9	24.4
4H	25.5	26.8	26.1	27.3	27.8	22.7	23.9	23.2	24.4	24.9
6H	26.8	28.0	27.3	28.5	29.0	23.0	24.2	23.6	24.7	25.2
8H	27.5	28.6	28.0	29.1	29.7	23.1	24.2	23.6	24.7	25.3
12H	28.3	29.4	28.8	29.9	30.5	23.1	24.2	23.7	24.7	25.3
4H 2H	22.7	23.9	23.2	24.4	24.9	21.6	22.8	22.1	23.3	23.9
3H	25.1	26.2	25.7	26.7	27.3	23.3	24.4	23.9	24.9	25.5
4H	26.5	27.5	27.0	28.0	28.6	24.0	25.0	24.6	25.6	26.2
6H	27.9	28.8	28.5	29.4	30.0	24.6	25.5	25.2	26.0	26.7
8H	28.7	29.6	29.3	30.1	30.8	24.7	25.6	25.4	26.2	26.8
12H	29.7	30.4	30.3	31.0	31.7	24.8	25.6	25.5	26.2	26.9
8H 4H	26.8	27.6	27.4	28.2	28.9	24.8	25.6	25.4	26.2	26.9
6H	28.5	29.2	29.1	29.8	30.5	25.6	26.3	26.3	26.9	27.7
8H	29.5	30.1	30.1	30.7	31.5	26.0	26.6	26.6	27.2	28.0
12H	30.6	31.2	31.3	31.8	32.6	26.2	26.8	26.9	27.4	28.2
12H 4H	26.8	27.5	27.4	28.2	28.8	25.0	25.7	25.6	26.3	27.0
6H	28.6	29.2	29.2	29.8	30.6	26.0	26.6	26.6	27.2	28.0
8H	29.7	30.2	30.3	30.9	31.6	26.5	27.0	27.1	27.7	28.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.5				

CIE Pub.117, 3873 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.7)
 Area: 0.070821 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.37V I:0.1073A P:24.350W PF:0.9439 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3872.9x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	51	39	31	50	38	31	48	37	31	24
0.80	60	48	40	59	47	39	56	46	39	31
1.00	68	56	48	66	55	47	63	56	46	38
1.25	75	63	55	73	62	54	69	60	53	44
1.50	80	69	61	78	67	60	73	64	58	48
2.00	87	77	69	85	75	68	79	72	66	55
2.50	92	82	75	89	80	73	83	76	70	59
3.00	95	87	80	92	84	78	86	80	75	63
4.00	100	92	87	96	90	84	90	85	80	67
5.00	103	96	91	99	93	88	92	88	84	70
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.37V I:0.1073A P:24.350W PF:0.9439 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3872.9x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

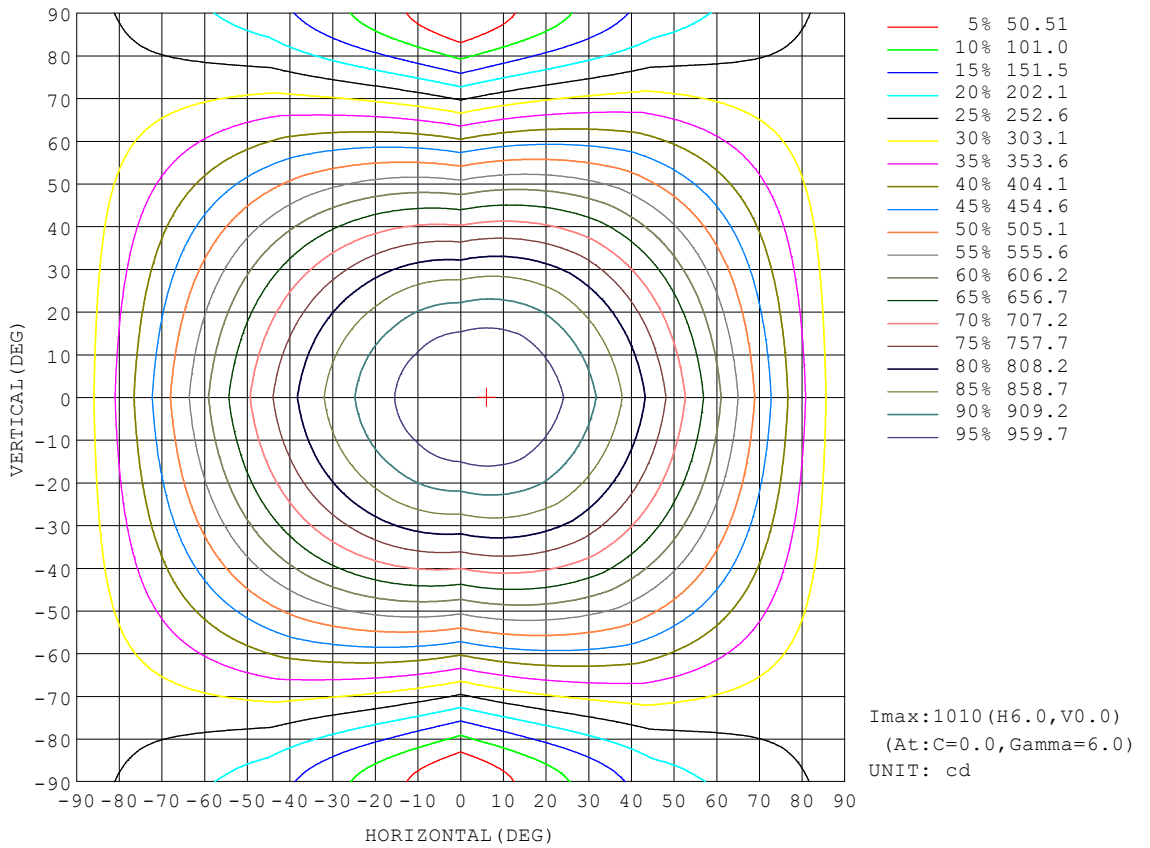


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.37V I:0.1073A P:24.350W PF:0.9439 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3872.9x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

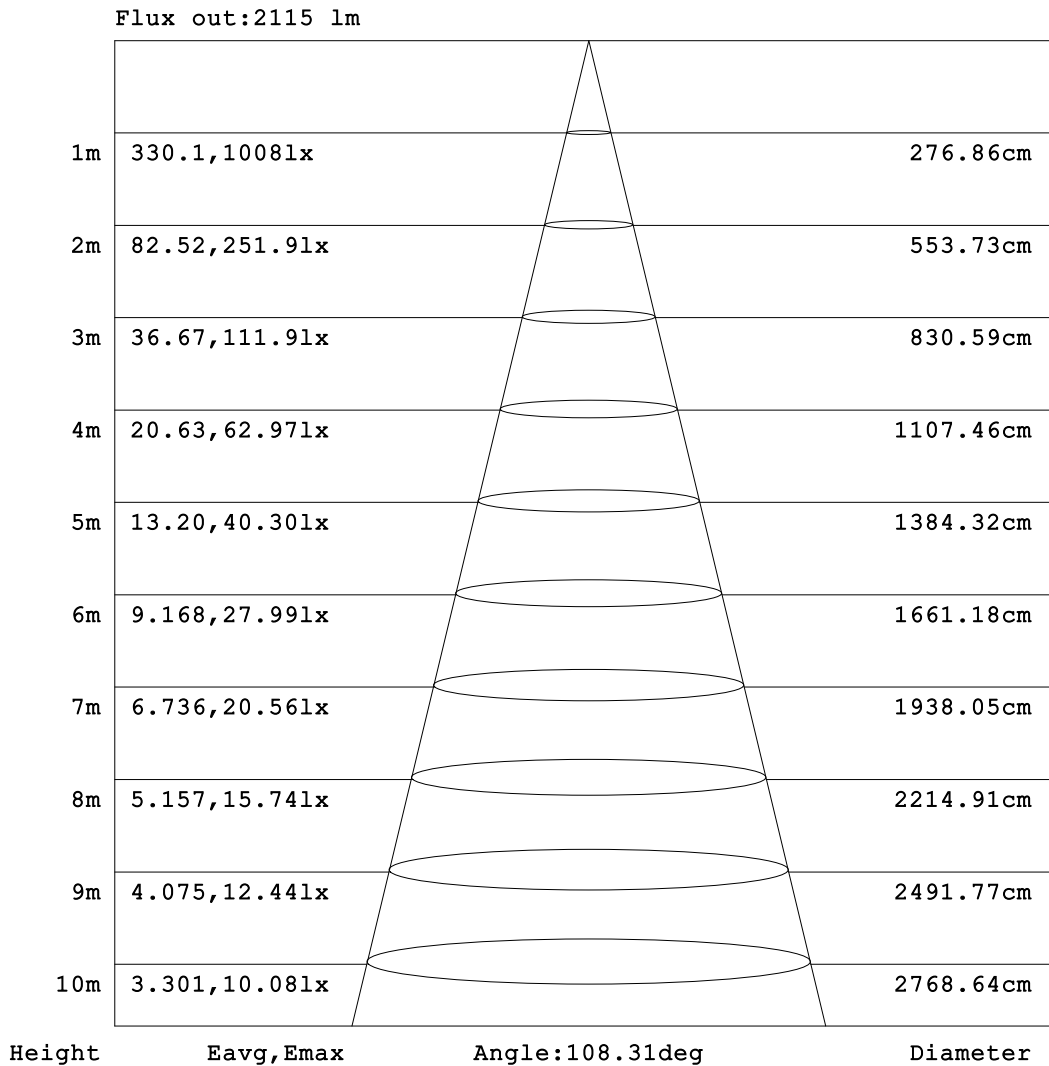


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.37V I:0.1073A P:24.350W PF:0.9439 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3872.9x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

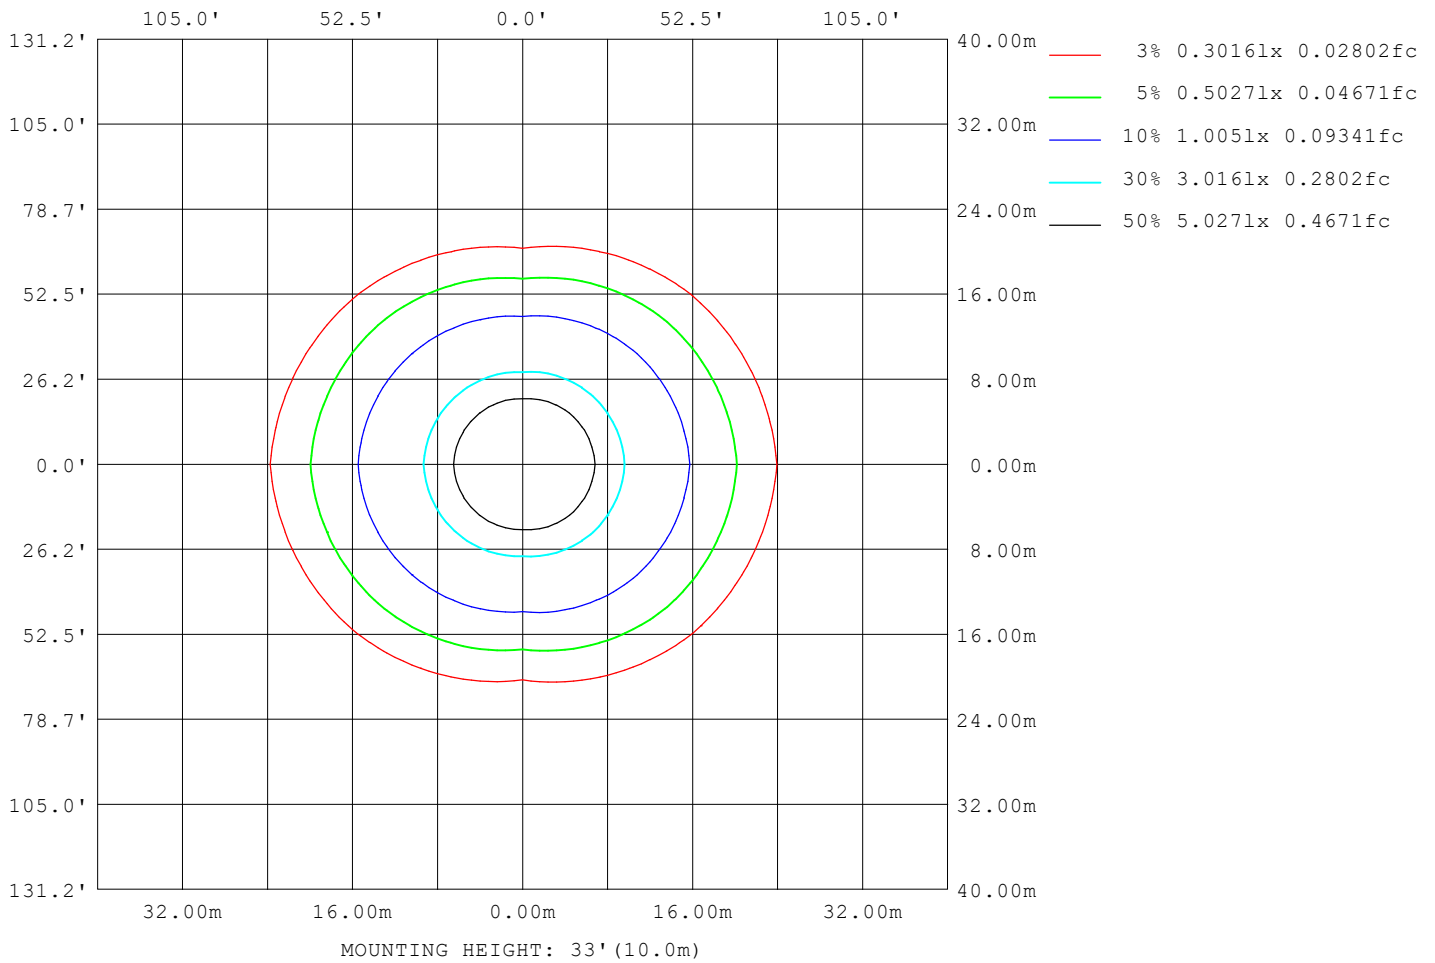

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.37V I:0.1073A P:24.350W PF:0.9439 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3872.9x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	18322
L_0~180 (75) av	23155
L_0~180 (85) av	50317
L_90~270 (65) av	10974
L_90~270 (75) av	8983
L_90~270 (85) av	4823
L_45 (65) av	15302
L_45 (75) av	17775
L_45 (85) av	34142

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

Planar Illuminance Curve

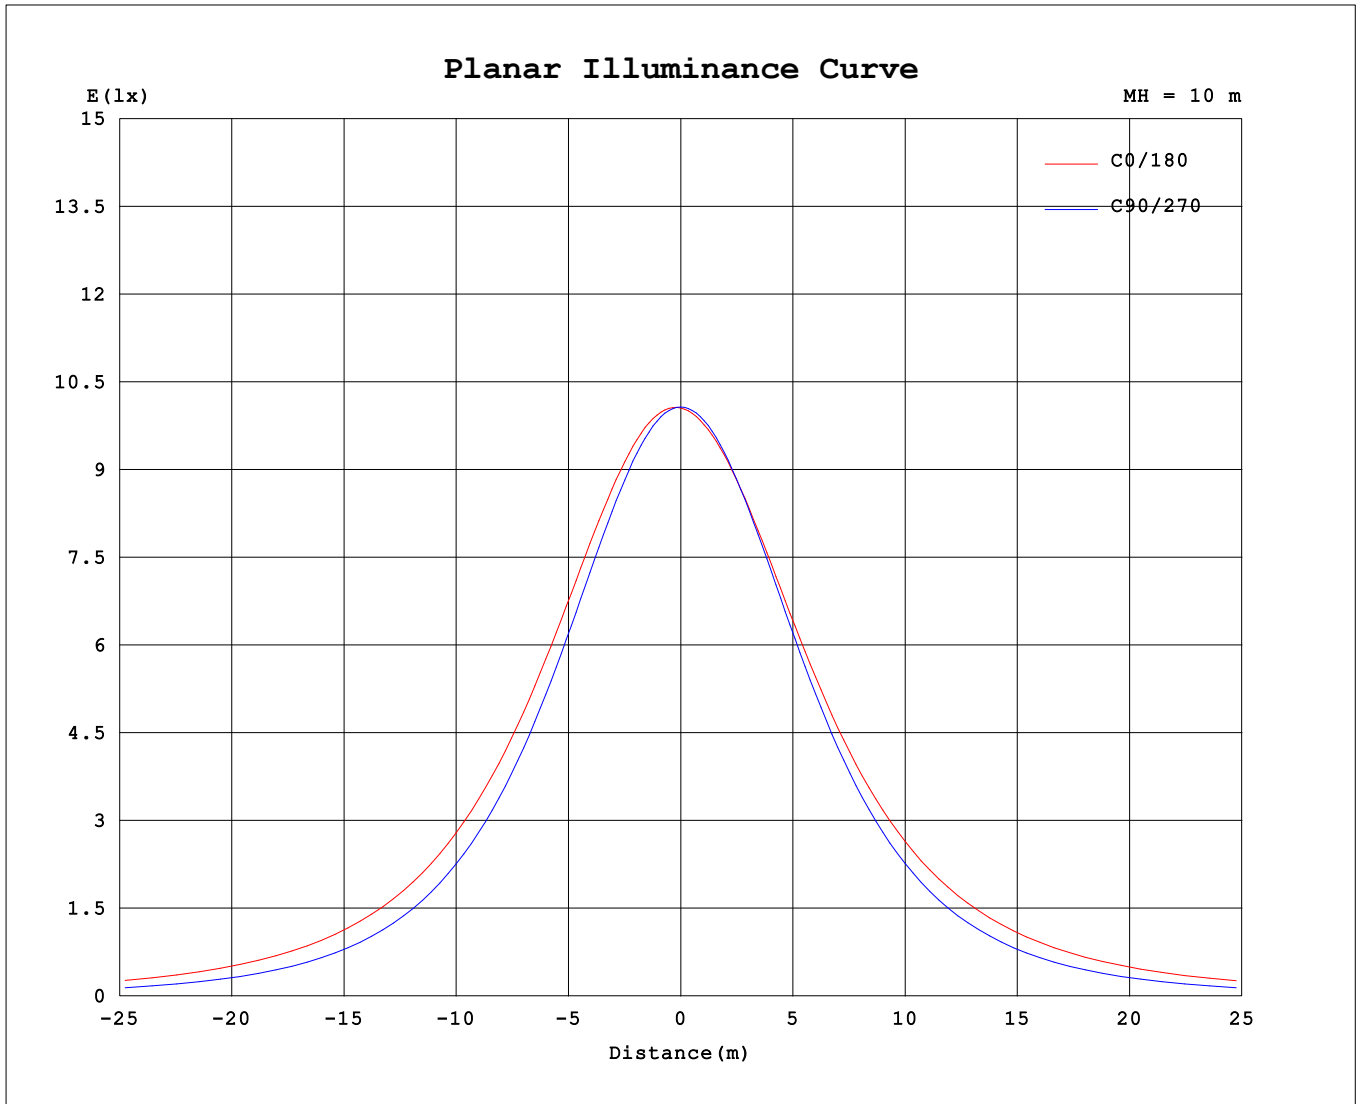

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.37V I:0.1073A P:24.350W PF:0.9439 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3872.9x1 lm		
NAME: E-B40W	TYPE: 25W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315											
0	1007	1007	1007	1007	1007	1007	1007	1007											
5	1011	1008	1001	997	997	997	1002	1008											
10	1009	1001	986	981	983	981	986	1001											
15	999	985	960	957	963	957	961	985											
20	981	960	925	927	939	927	926	960											
25	956	928	881	890	909	891	883	927											
30	923	888	830	848	875	848	832	887											
35	884	841	772	801	836	801	774	839											
40	840	788	708	749	794	749	710	786											
45	792	730	639	694	749	694	641	728											
50	738	669	566	636	702	636	568	666											
55	680	604	490	576	651	576	491	601											
60	620	537	410	514	597	513	411	533											
65	556	468	328	450	540	449	329	464											
70	491	399	246	386	482	385	246	395											
75	426	331	164	323	423	322	165	327											
80	364	268	90.0	263	365	262	89.6	264											
85	309	213	29.8	211	312	210	29.7	209											
90	270	177	1.97	175	272	174	1.83	173											
95	243	153	2.52	154	247	154	2.25	150											
100	218	134	3.75	137	225	138	3.79	132											
105	195	118	5.22	123	204	123	5.43	115											
110	174	103	6.82	111	185	111	7.21	101											
115	155	86.0	8.43	99.7	167	99.8	9.05	85.9											
120	137	73.3	9.98	90.1	150	90.5	10.8	72.8											
125	121	61.1	11.5	81.5	134	81.8	12.6	61.7											
130	106	51.3	12.9	73.6	119	73.9	14.2	51.8											
135	92.6	43.8	14.2	66.4	105	66.7	15.6	43.9											
140	80.1	37.5	15.4	59.8	91.7	60.0	17.0	37.8											
145	68.5	32.0	16.9	53.7	79.4	53.9	18.2	32.3											
150	57.9	27.5	19.5	48.1	65.9	48.4	19.9	27.9											
155	48.3	23.9	21.9	42.9	55.8	41.8	22.2	24.4											
160	39.9	22.6	24.1	38.0	47.5	36.9	24.5	22.3											
165	32.8	21.2	26.1	32.0	38.8	31.8	26.6	21.0											
170	25.9	20.3	27.7	27.6	30.2	27.2	28.3	20.2											
175	15.9	24.1	29.0	29.2	17.2	28.7	29.3	24.4											
180	18.9	29.5	29.9	29.7	18.9	29.6	30.0	29.7											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks: