
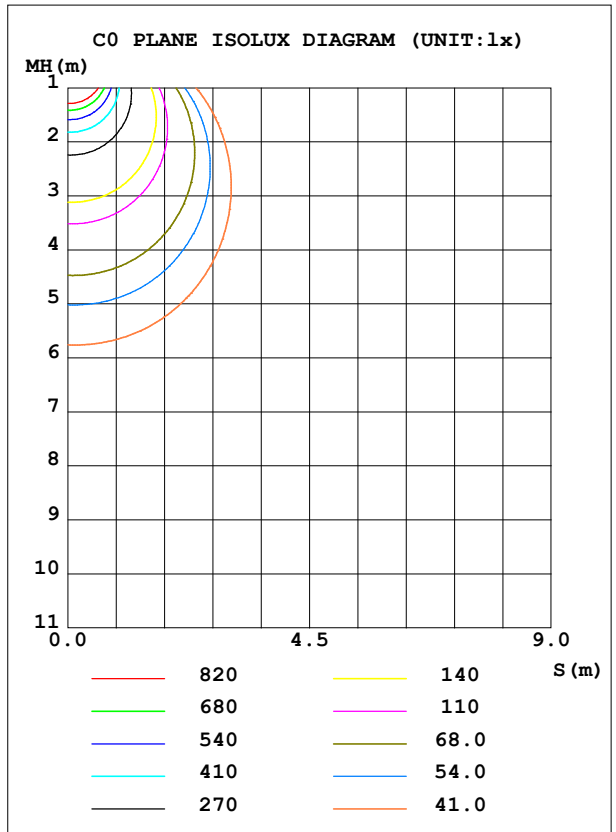


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.36V I:0.1440A P:33.140W PF:0.9573 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5240.1x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	E-B40W	Imax (cd)	1368	S/MH (C0/180)	1.36
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	5240.1	η UP, DN (C0-180)	6.6,43.5
NOMINAL FLUX (lm)	5240.1	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	6.8,43.0
LAMPS INSIDE	1	η up (%)	13.4	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	240	η down (%)	86.6	CIBSE SHR MAX	1.50

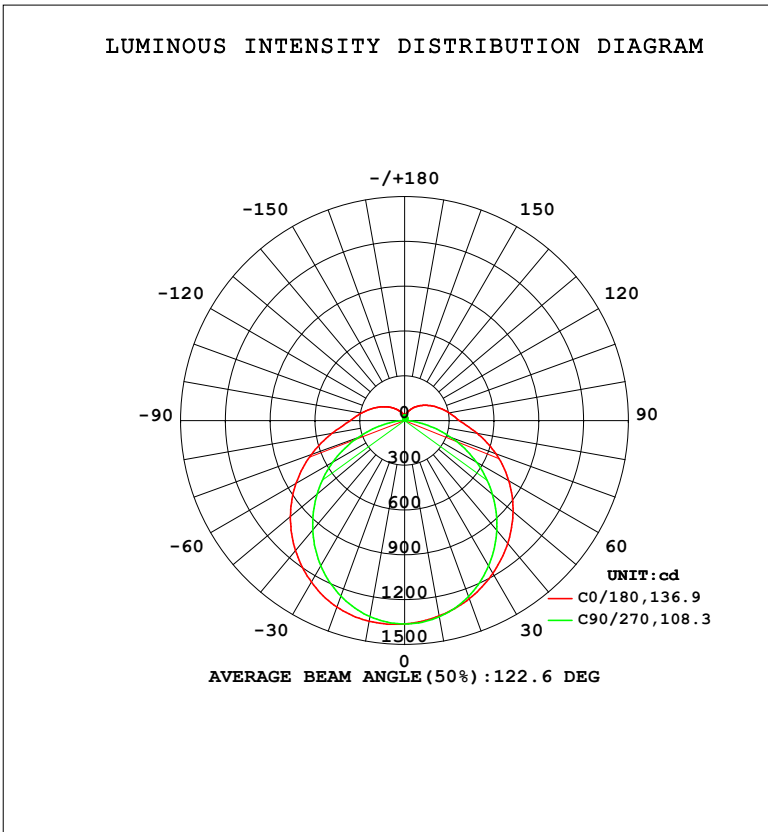

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1365	1354	1334	1328	1329	1327	1335	1354	0- 10	129.0	129.0	2.46,2.46
20	1328	1300	1252	1255	1270	1255	1253	1300	10- 20	371.0	500.0	9.54,9.54
30	1249	1201	1123	1148	1183	1148	1125	1200	20- 30	566.6	1067	20.4,20.4
40	1137	1065	958.5	1014	1075	1015	960.5	1064	30- 40	693.3	1760	33.6,33.6
50	998.9	904.0	766.2	861.5	948.4	860.6	768.2	901.1	40- 50	739.9	2500	47.7,47.7
60	839.2	725.8	554.6	696.0	806.2	694.7	555.8	722.1	50- 60	706.1	3206	61.2,61.2
70	665.4	539.4	332.2	522.8	651.4	521.4	332.6	534.9	60- 70	600.5	3806	72.6,72.6
80	492.2	361.9	120.8	356.2	493.3	355.2	121.3	357.2	70- 80	444.1	4250	81.1,81.1
90	366.2	237.4	2.665	235.4	368.1	235.9	2.490	234.3	80- 90	286.0	4536	86.6,86.6
100	295.2	181.5	5.074	185.9	304.0	186.4	5.164	178.3	90-100	204.6	4741	90.5,90.5
110	235.9	139.7	9.267	149.9	249.7	150.0	9.771	137.3	100-110	159.6	4901	93.5,93.5
120	185.7	99.16	13.54	122.0	202.1	122.0	14.66	98.04	110-120	120.0	5021	95.8,95.8
130	143.4	69.38	17.46	99.71	160.6	99.59	19.13	69.86	120-130	85.88	5106	97.5,97.5
140	107.9	50.72	20.87	80.95	123.9	81.26	22.99	50.97	130-140	58.93	5165	98.6,98.6
150	78.32	37.19	26.44	65.11	91.57	65.50	26.87	37.57	140-150	37.98	5203	99.3,99.3
160	53.89	30.66	32.56	51.41	64.11	50.40	33.16	30.12	150-160	22.33	5226	99.7,99.7
170	35.08	27.48	37.37	37.30	40.97	36.74	38.15	27.36	160-170	11.18	5237	99.9,99.9
180	25.58	39.91	40.39	40.12	25.57	39.97	40.44	40.19	170-180	3.193	5240	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2129.1 lm

%lum = 40.6%

%lamp = 40.6%

Conical surface Flux(120deg): 3205.8 lm

%lum = 61.2%


%lamp = 61.2%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.36V I:0.1440A P:33.140W PF:0.9573 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5240.1x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

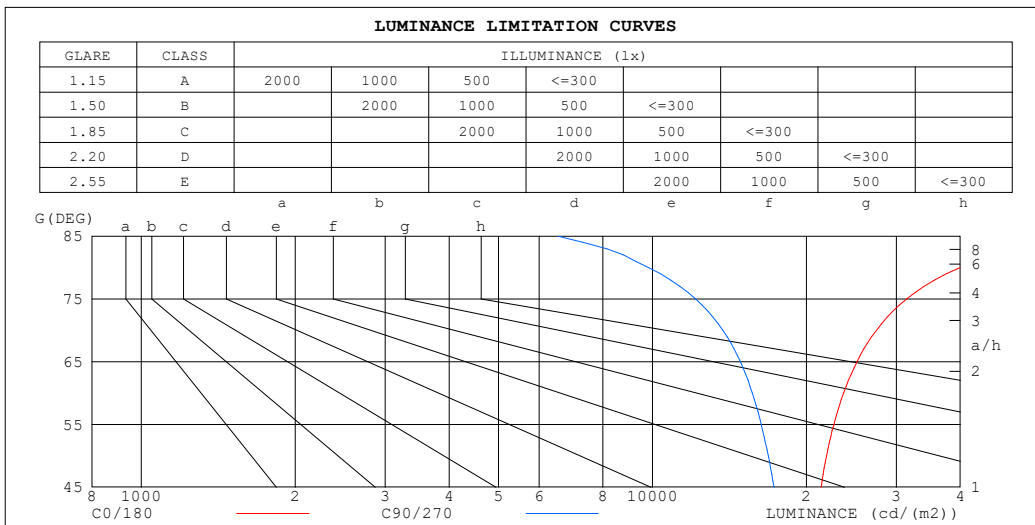

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	67689	6541
80	39957	9833
75	31425	12139
70	27422	13727
65	25134	14855
60	23658	15675
55	22639	16322
50	21905	16845
45	21366	17289


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.36V I:0.1440A P:33.140W PF:0.9573 Freq:49.99Hz		
UTHDI:0.00% ITHDI:0.00% KDisp:0 Lamp Flux:5240.1x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.96	.96	.96	.90	.90	.90	.87
1.0	.98	.93	.89	.95	.90	.86	.88	.84	.81	.82	.79	.76	.76	.74	.71	.68
2.0	.85	.77	.71	.81	.75	.69	.76	.70	.65	.70	.66	.62	.65	.62	.58	.55
3.0	.74	.65	.58	.71	.63	.57	.66	.59	.54	.61	.56	.51	.57	.53	.49	.46
4.0	.65	.56	.49	.63	.54	.48	.58	.51	.45	.54	.48	.43	.51	.46	.41	.39
5.0	.58	.48	.41	.56	.47	.41	.52	.45	.39	.49	.42	.37	.45	.40	.36	.33
6.0	.52	.43	.36	.50	.41	.35	.47	.39	.34	.44	.37	.33	.41	.36	.31	.29
7.0	.47	.38	.32	.45	.37	.31	.43	.35	.30	.40	.33	.29	.37	.32	.28	.25
8.0	.43	.34	.28	.41	.33	.27	.39	.32	.26	.37	.30	.26	.34	.29	.25	.22
9.0	.39	.31	.25	.38	.30	.25	.36	.29	.24	.34	.27	.23	.32	.26	.22	.20
10.0	.36	.28	.23	.35	.27	.22	.33	.26	.21	.31	.25	.21	.29	.24	.20	.18

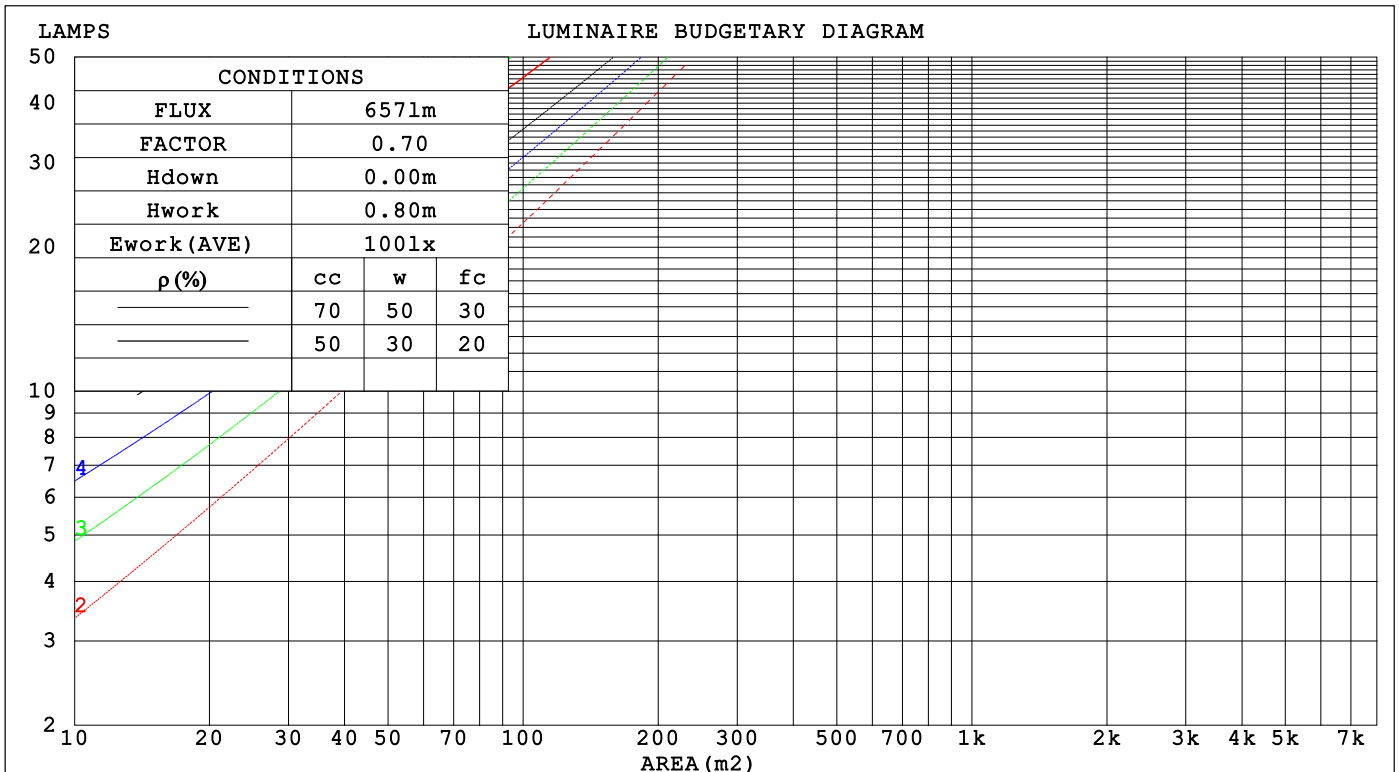

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.36V I:0.1440A P:33.140W PF:0.9573 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5240.1x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.357	.203	.064	.346	.197	.063	.325	.186	.060	.306	.176	.057	.288	.167	.054	
2.0	.317	.174	.053	.307	.169	.052	.288	.160	.050	.271	.152	.048	.255	.144	.045	
3.0	.286	.152	.046	.277	.148	.045	.260	.141	.043	.244	.134	.041	.229	.127	.039	
4.0	.259	.135	.040	.251	.131	.039	.236	.125	.037	.221	.119	.036	.208	.113	.034	
5.0	.237	.121	.035	.230	.118	.034	.216	.112	.033	.203	.107	.032	.191	.102	.031	
6.0	.218	.109	.031	.212	.107	.031	.199	.102	.030	.187	.097	.029	.176	.093	.027	
7.0	.202	.100	.028	.196	.098	.028	.184	.093	.027	.173	.089	.026	.163	.085	.025	
8.0	.188	.092	.026	.182	.090	.025	.172	.086	.024	.162	.082	.024	.152	.078	.023	
9.0	.175	.085	.024	.170	.083	.023	.160	.079	.022	.151	.076	.022	.143	.072	.021	
10.0	.164	.079	.022	.160	.077	.022	.151	.074	.021	.142	.071	.020	.134	.068	.019	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.293	.293	.293	.250	.250	.250	.171	.171	.171	.098	.098	.098	.031	.031	.031	
1.0	.287	.259	.234	.245	.222	.201	.168	.153	.139	.097	.088	.081	.031	.028	.026	
2.0	.280	.236	.199	.239	.203	.172	.164	.140	.120	.095	.082	.070	.030	.026	.023	
3.0	.272	.219	.176	.233	.189	.153	.160	.131	.107	.092	.077	.063	.030	.025	.021	
4.0	.264	.206	.162	.227	.178	.140	.156	.124	.099	.090	.073	.059	.029	.024	.019	
5.0	.257	.196	.151	.220	.170	.132	.152	.119	.093	.088	.070	.055	.028	.023	.018	
6.0	.249	.188	.144	.214	.163	.125	.148	.114	.089	.086	.067	.053	.028	.022	.017	
7.0	.242	.181	.139	.209	.157	.121	.144	.110	.086	.084	.065	.051	.027	.021	.017	
8.0	.236	.176	.134	.203	.152	.117	.140	.107	.083	.082	.063	.050	.026	.021	.016	
9.0	.230	.171	.131	.198	.148	.114	.137	.104	.081	.080	.062	.048	.026	.020	.016	
10.0	.224	.167	.129	.193	.145	.112	.134	.102	.080	.078	.060	.048	.025	.020	.016	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.36V I:0.1440A P:33.140W PF:0.9573 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5240.1x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.2	24.6	23.6	25.0	25.5	21.7	23.1	22.2	23.6	24.0
3H	25.4	26.7	25.9	27.2	27.7	23.2	24.5	23.7	24.9	25.5
4H	26.6	27.8	27.1	28.3	28.8	23.7	25.0	24.2	25.4	26.0
6H	27.9	29.0	28.4	29.5	30.1	24.1	25.2	24.6	25.7	26.3
8H	28.6	29.7	29.1	30.2	30.8	24.2	25.3	24.7	25.8	26.4
12H	29.4	30.4	29.9	31.0	31.5	24.2	25.3	24.7	25.8	26.4
4H 2H	23.7	24.9	24.2	25.4	26.0	22.7	23.9	23.2	24.4	24.9
3H	26.2	27.2	26.7	27.8	28.4	24.4	25.4	24.9	26.0	26.6
4H	27.5	28.5	28.1	29.1	29.7	25.1	26.1	25.7	26.6	27.2
6H	29.0	29.9	29.6	30.4	31.1	25.6	26.5	26.2	27.1	27.7
8H	29.8	30.6	30.4	31.2	31.9	25.8	26.6	26.4	27.2	27.9
12H	30.7	31.5	31.3	32.1	32.8	25.9	26.6	26.5	27.2	27.9
8H 4H	27.8	28.6	28.4	29.2	29.9	25.8	26.6	26.4	27.2	27.9
6H	29.5	30.2	30.2	30.8	31.6	26.7	27.4	27.3	28.0	28.7
8H	30.5	31.1	31.2	31.8	32.5	27.0	27.6	27.7	28.3	29.0
12H	31.7	32.2	32.4	32.9	33.6	27.3	27.8	27.9	28.5	29.2
12H 4H	27.8	28.6	28.5	29.2	29.9	26.0	26.8	26.6	27.4	28.1
6H	29.6	30.3	30.3	30.9	31.6	27.0	27.7	27.7	28.3	29.0
8H	30.7	31.3	31.4	31.9	32.7	27.5	28.1	28.2	28.7	29.5

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.1 / - 0.1	+ 0.1 / - 0.2
1.5H	+ 0.2 / - 0.2	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.5

CIE Pub.117, 5240 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.8)
 Area: 0.070821 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.36V I:0.1440A P:33.140W PF:0.9573 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5240.1x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	51	39	31	50	38	31	48	37	31	24
0.80	60	48	40	59	47	40	56	46	39	31
1.00	68	56	48	66	55	47	63	56	46	38
1.25	75	63	55	73	62	54	69	60	53	44
1.50	80	69	61	78	67	60	73	64	58	48
2.00	87	77	69	85	75	68	79	72	66	55
2.50	92	82	75	89	80	73	83	76	70	59
3.00	95	87	80	92	84	78	86	80	75	63
4.00	100	92	87	96	90	84	90	85	80	67
5.00	103	96	91	99	93	88	92	88	84	70
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.36V I:0.1440A P:33.140W PF:0.9573 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5240.1x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

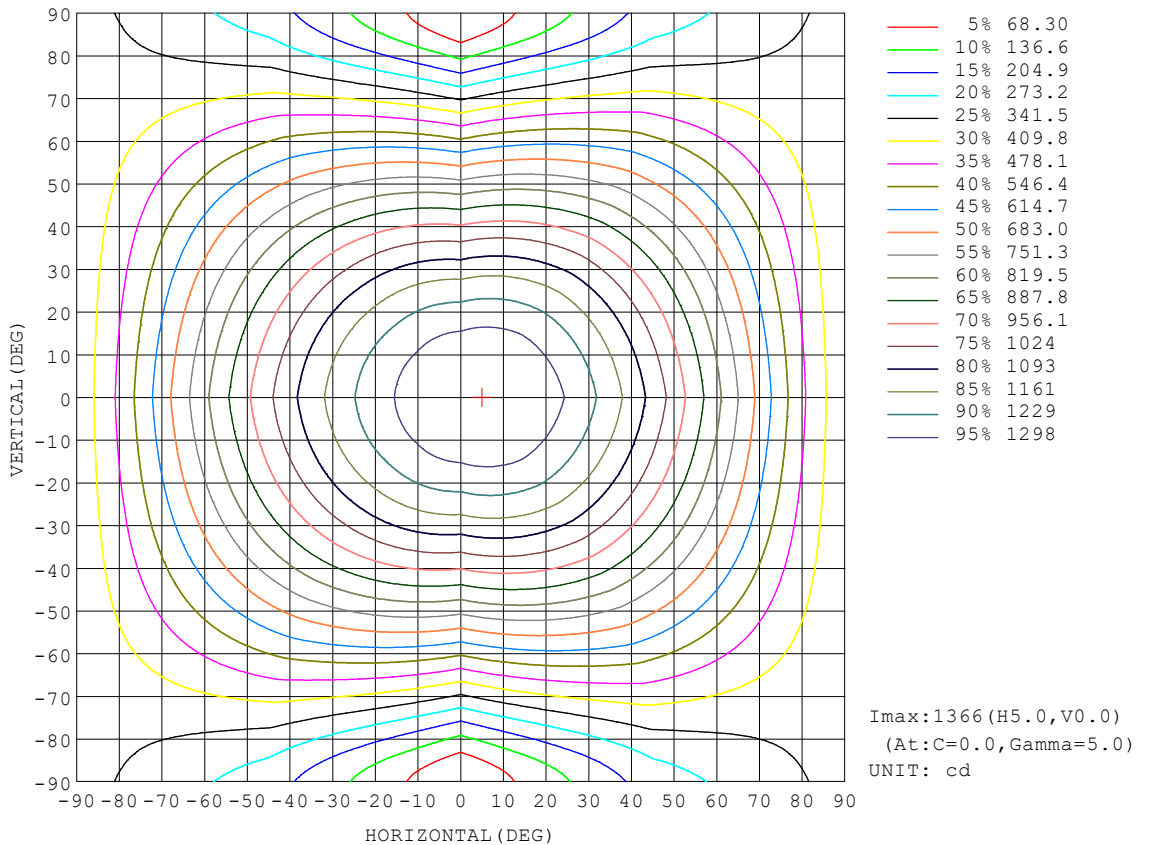


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.36V I:0.1440A P:33.140W PF:0.9573 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5240.1x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

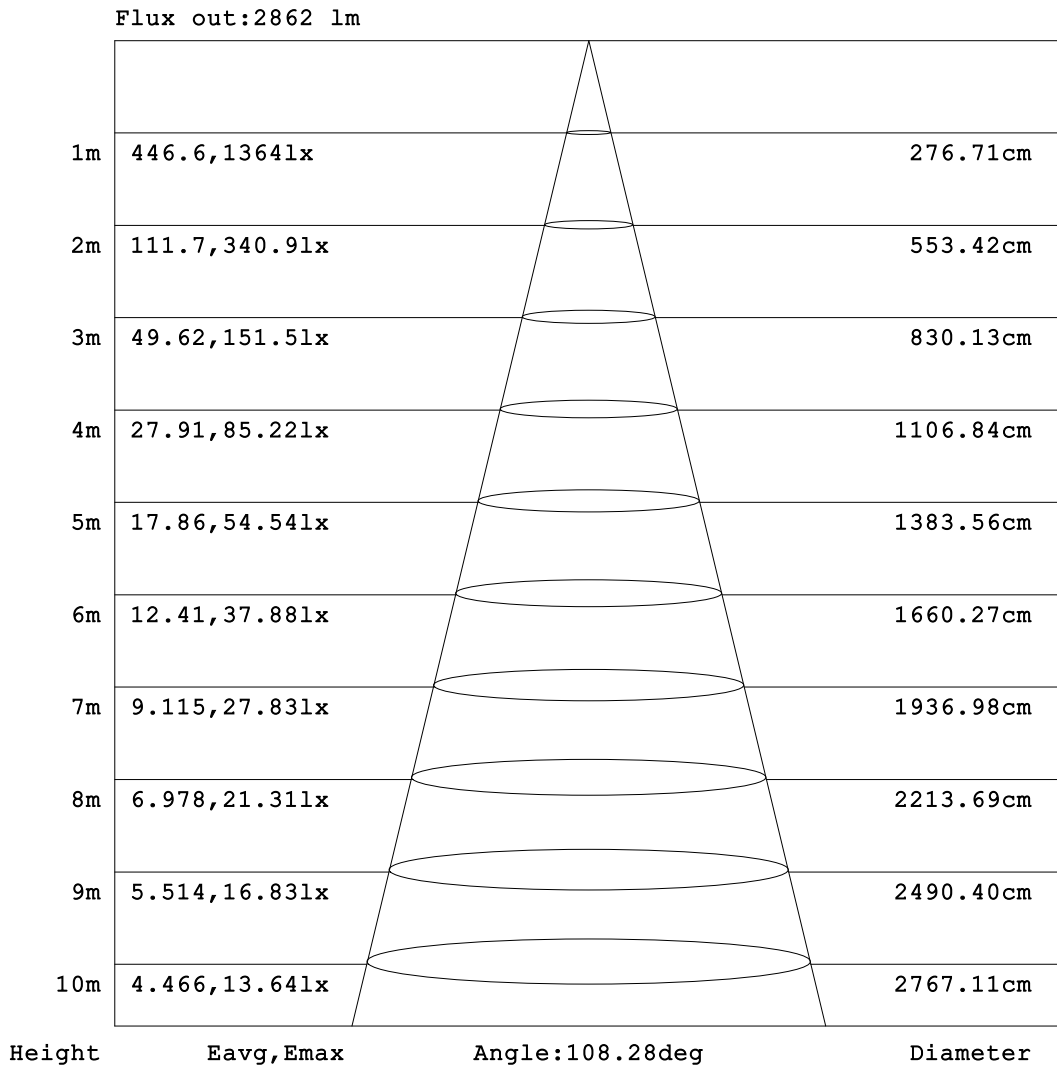


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.36V I:0.1440A P:33.140W PF:0.9573 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5240.1x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

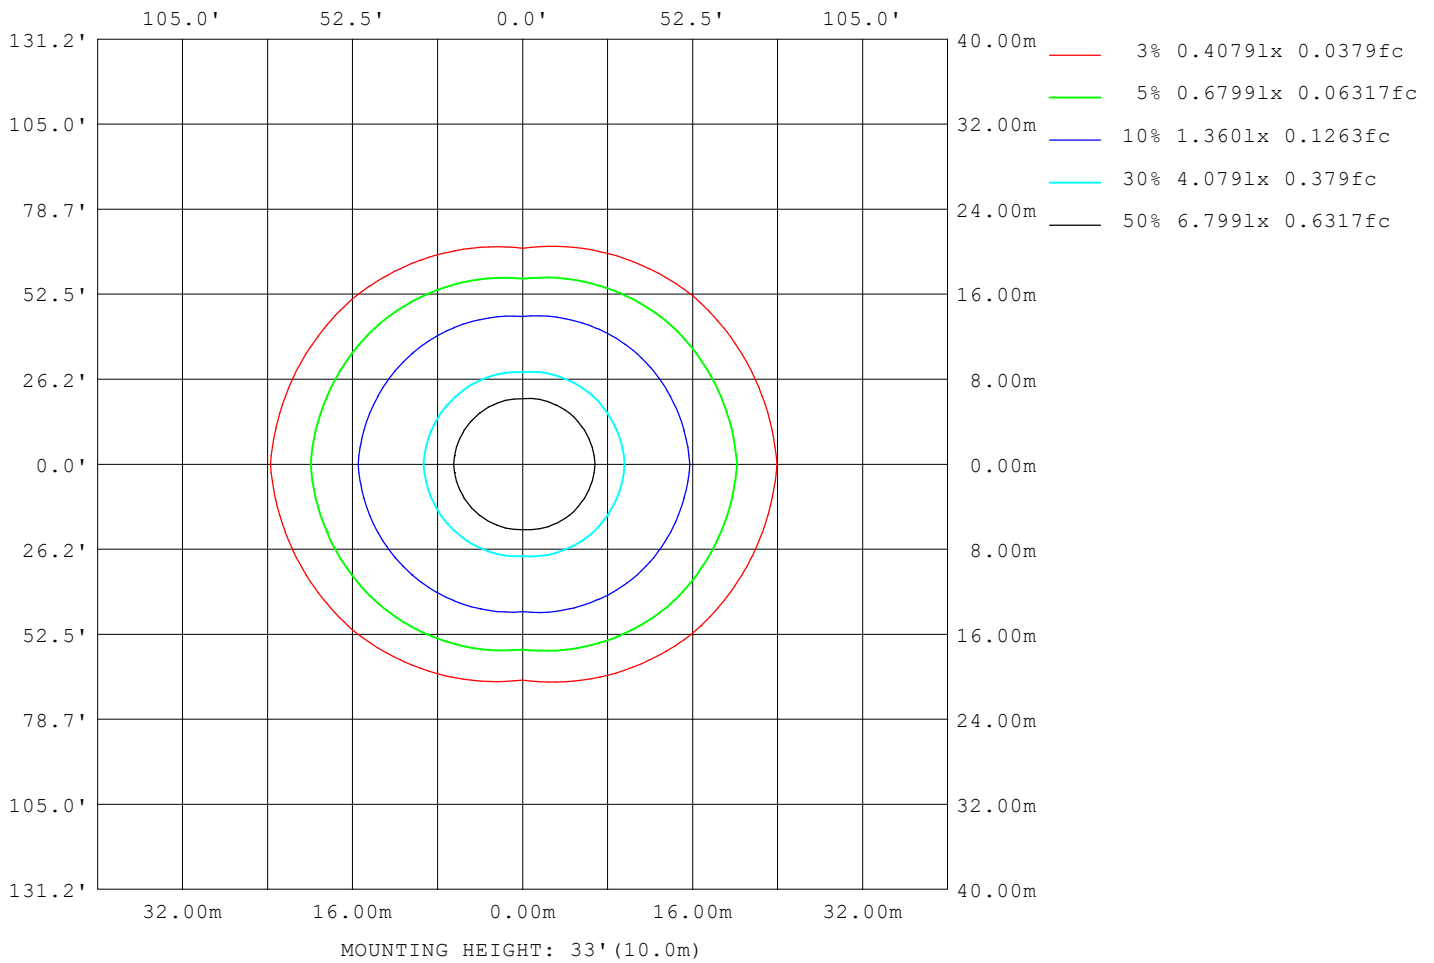

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.36V I:0.1440A P:33.140W PF:0.9573 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5240.1x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	24784
L_0~180 (75) av	31331
L_0~180 (85) av	68101
L_90~270 (65) av	14853
L_90~270 (75) av	12138
L_90~270 (85) av	6527
L_45 (65) av	20710
L_45 (75) av	24062
L_45 (85) av	46208

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

Planar Illuminance Curve

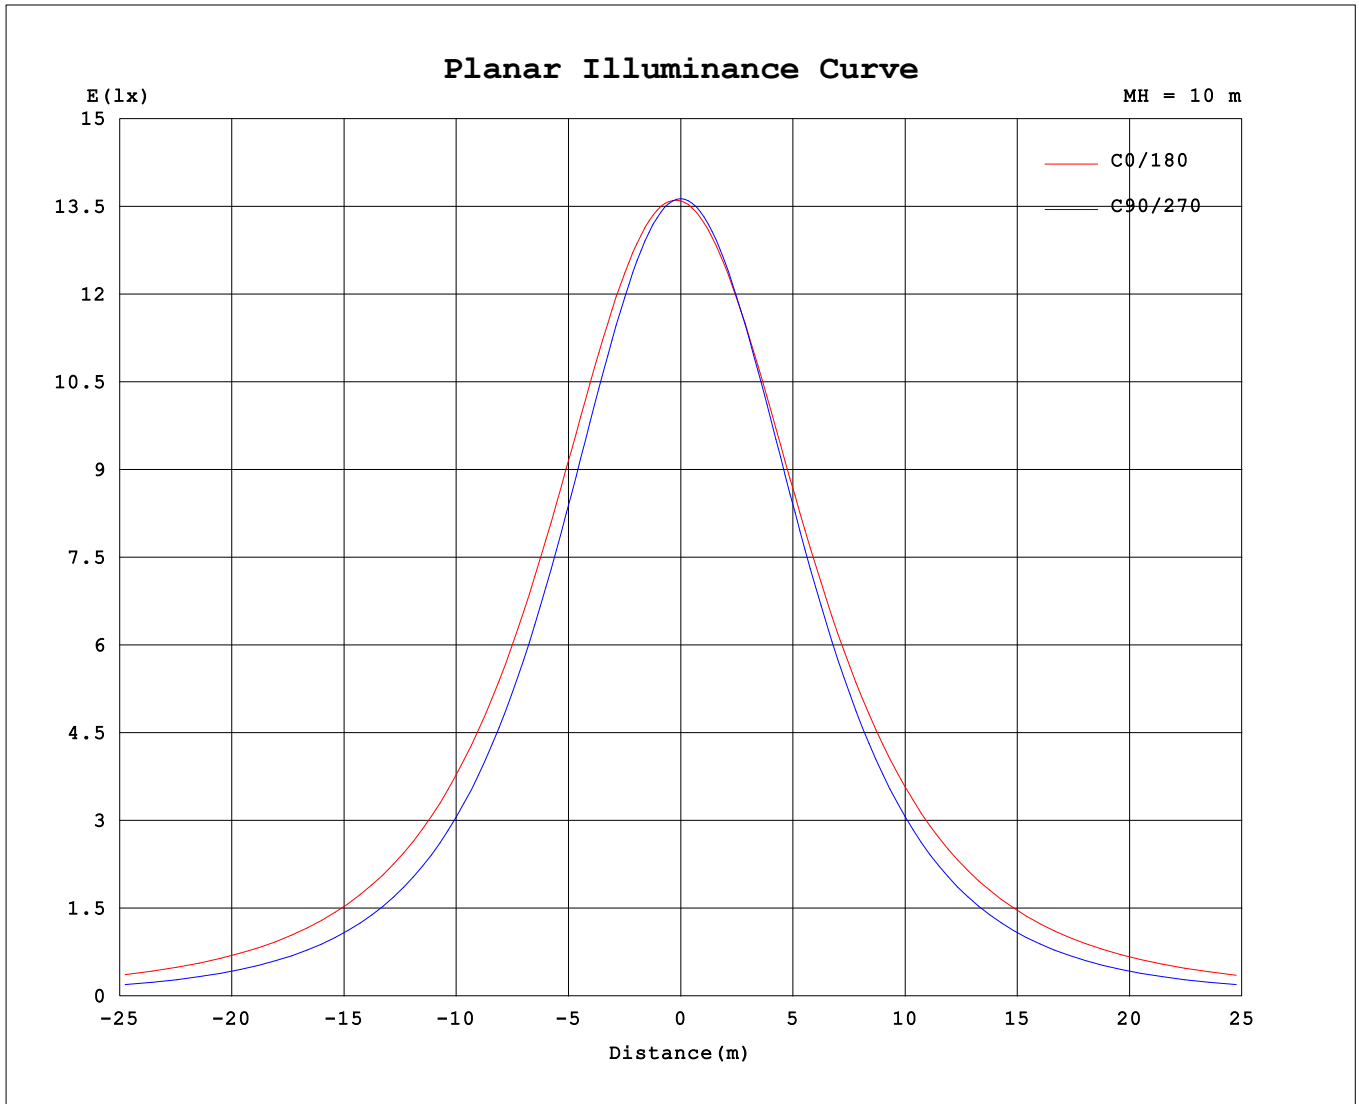

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.36V I:0.1440A P:33.140W PF:0.9573 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5240.1x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315											
0	1362	1362	1362	1362	1362	1362	1362	1362											
5	1368	1364	1355	1350	1349	1350	1355	1364											
10	1365	1354	1334	1328	1329	1327	1335	1354											
15	1353	1333	1299	1296	1303	1295	1300	1333											
20	1328	1300	1252	1255	1270	1255	1253	1300											
25	1294	1255	1192	1205	1229	1205	1195	1255											
30	1249	1201	1123	1148	1183	1148	1125	1200											
35	1198	1137	1045	1084	1131	1084	1047	1136											
40	1137	1065	959	1014	1075	1015	960	1064											
45	1072	987	865	939	1013	940	867	985											
50	999	904	766	861	948	861	768	901											
55	921	817	662	780	880	779	664	813											
60	839	726	555	696	806	695	556	722											
65	754	633	444	610	730	608	445	629											
70	665	539	332	523	651	521	333	535											
75	577	448	222	437	572	436	223	443											
80	492	362	121	356	493	355	121	357											
85	419	287	40.3	285	422	285	40.2	283											
90	366	237	2.66	235	368	236	2.49	234											
95	329	207	3.41	208	333	209	3.10	204											
100	295	181	5.07	186	304	186	5.16	178											
105	264	160	7.10	167	276	167	7.35	156											
110	236	140	9.27	150	250	150	9.77	137											
115	210	116	11.4	135	225	135	12.2	116											
120	186	99.2	13.5	122	202	122	14.7	98.0											
125	164	82.6	15.6	110	180	110	17.0	83.3											
130	143	69.4	17.5	99.7	161	99.6	19.1	69.9											
135	125	59.3	19.2	89.9	142	90.3	21.2	59.3											
140	108	50.7	20.9	80.9	124	81.3	23.0	51.0											
145	92.6	43.3	22.9	72.7	107	73.0	24.6	43.6											
150	78.3	37.2	26.4	65.1	91.6	65.5	26.9	37.6											
155	65.3	32.4	29.7	58.0	74.6	58.1	30.0	33.0											
160	53.9	30.7	32.6	51.4	64.1	50.4	33.2	30.1											
165	44.4	28.7	35.2	43.3	52.8	42.2	36.0	28.3											
170	35.1	27.5	37.4	37.3	41.0	36.7	38.2	27.4											
175	21.6	32.7	39.1	39.4	23.2	38.9	39.5	33.3											
180	25.6	39.9	40.4	40.1	25.6	40.0	40.4	40.2											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks: