
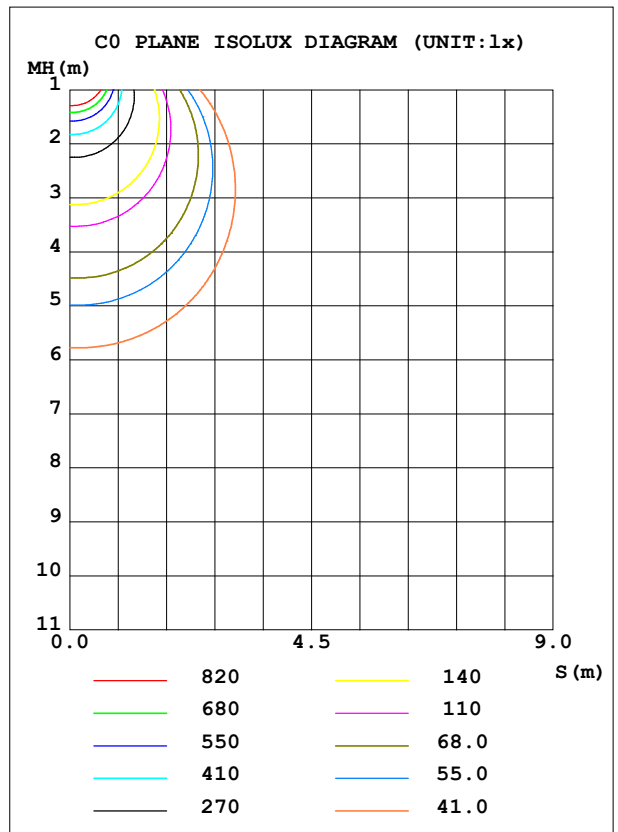


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.36V I:0.1472A P:33.900W PF:0.9579 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5235.86x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	E-B40W	Imax (cd)	1377	S/MH (C0/180)	1.38
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	5235.9	η UP, DN (C0-180)	6.8, 44.0
NOMINAL FLUX (lm)	5235.86	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	6.6, 42.6
LAMPS INSIDE	1	η up (%)	13.4	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	240	η down (%)	86.6	CIBSE SHR MAX	1.50

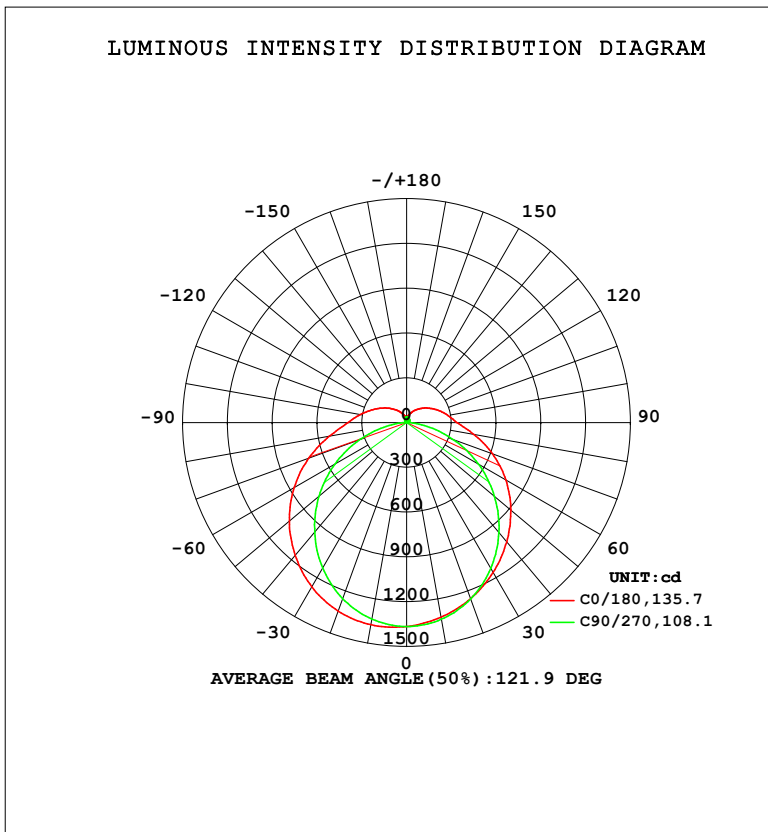

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1375	1364	1337	1325	1324	1325	1338	1364	0- 10	129.3	129.3	2.47,2.47
20	1344	1315	1254	1246	1255	1246	1257	1314	10- 20	371.7	501.1	9.57,9.57
30	1270	1218	1125	1133	1159	1134	1128	1218	20- 30	567.3	1068	20.4,20.4
40	1162	1086	958.8	992.6	1044	994.0	962.4	1085	30- 40	693.4	1762	33.6,33.6
50	1026	927.8	766.3	835.1	912.1	835.1	768.9	924.9	40- 50	739.0	2501	47.8,47.8
60	869.5	751.0	554.0	667.1	767.8	667.0	555.6	747.9	50- 60	704.5	3205	61.2,61.2
70	698.1	565.9	331.5	494.2	612.4	493.4	332.1	561.6	60- 70	599.0	3804	72.7,72.7
80	525.3	388.1	120.7	330.5	457.1	329.3	120.6	383.0	70- 80	443.3	4248	81.1,81.1
90	393.3	258.6	2.695	215.4	338.0	216.5	2.501	254.6	80- 90	285.9	4533	86.6,86.6
100	315.9	195.3	5.089	172.6	282.4	173.2	5.152	192.0	90-100	204.7	4738	90.5,90.5
110	250.6	148.5	9.253	140.9	234.5	141.1	9.752	146.4	100-110	159.6	4898	93.5,93.5
120	195.7	104.2	13.48	115.9	191.0	116.1	14.64	103.2	110-120	119.8	5018	95.8,95.8
130	150.1	71.92	17.39	95.59	152.9	95.80	19.14	72.81	120-130	85.55	5103	97.5,97.5
140	112.2	52.05	20.76	78.14	118.7	78.56	22.99	52.58	130-140	58.60	5162	98.6,98.6
150	80.79	37.79	26.34	63.19	87.37	63.68	26.85	38.42	140-150	37.70	5199	99.3,99.3
160	55.10	30.97	32.50	50.18	62.12	48.57	33.03	30.52	150-160	22.13	5222	99.7,99.7
170	35.46	27.72	37.28	36.57	39.89	36.11	38.00	27.64	160-170	11.11	5233	99.9,99.9
180	25.41	39.80	40.29	39.96	25.40	39.85	40.30	39.99	170-180	3.177	5236	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2130.7 lm

%lum = 40.7%

%lamp = 40.7%

Conical surface Flux(120deg): 3205.3 lm

%lum = 61.2%


%lamp = 61.2%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.36V I:0.1472A P:33.900W PF:0.9579 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5235.86x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

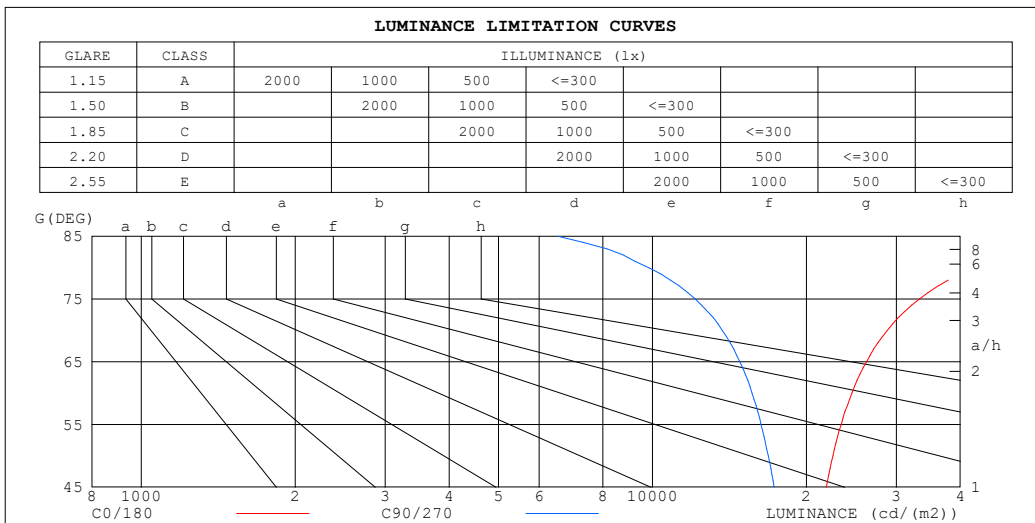

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	72838	6533
80	42698	9821
75	33272	12130
70	28811	13696
65	26222	14826
60	24546	15655
55	23395	16312
50	22538	16844
45	21884	17292


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.36V I:0.1472A P:33.900W PF:0.9579 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5235.86x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.96	.96	.96	.90	.90	.90	.87
1.0	.98	.93	.89	.95	.90	.86	.88	.84	.81	.82	.79	.76	.76	.74	.71	.68
2.0	.85	.77	.71	.81	.75	.69	.76	.70	.65	.70	.66	.62	.65	.62	.58	.55
3.0	.74	.65	.58	.71	.63	.57	.66	.59	.54	.62	.56	.51	.57	.53	.49	.46
4.0	.65	.56	.49	.63	.54	.48	.58	.51	.45	.54	.48	.43	.51	.46	.41	.39
5.0	.58	.48	.42	.56	.47	.41	.52	.45	.39	.49	.42	.37	.46	.40	.36	.33
6.0	.52	.43	.36	.50	.42	.35	.47	.39	.34	.44	.37	.33	.41	.36	.31	.29
7.0	.47	.38	.32	.45	.37	.31	.43	.35	.30	.40	.34	.29	.38	.32	.28	.25
8.0	.43	.34	.28	.41	.33	.27	.39	.32	.27	.37	.30	.26	.34	.29	.25	.23
9.0	.39	.31	.25	.38	.30	.25	.36	.29	.24	.34	.27	.23	.32	.26	.22	.20
10.0	.36	.28	.23	.35	.27	.22	.33	.26	.22	.31	.25	.21	.29	.24	.20	.18

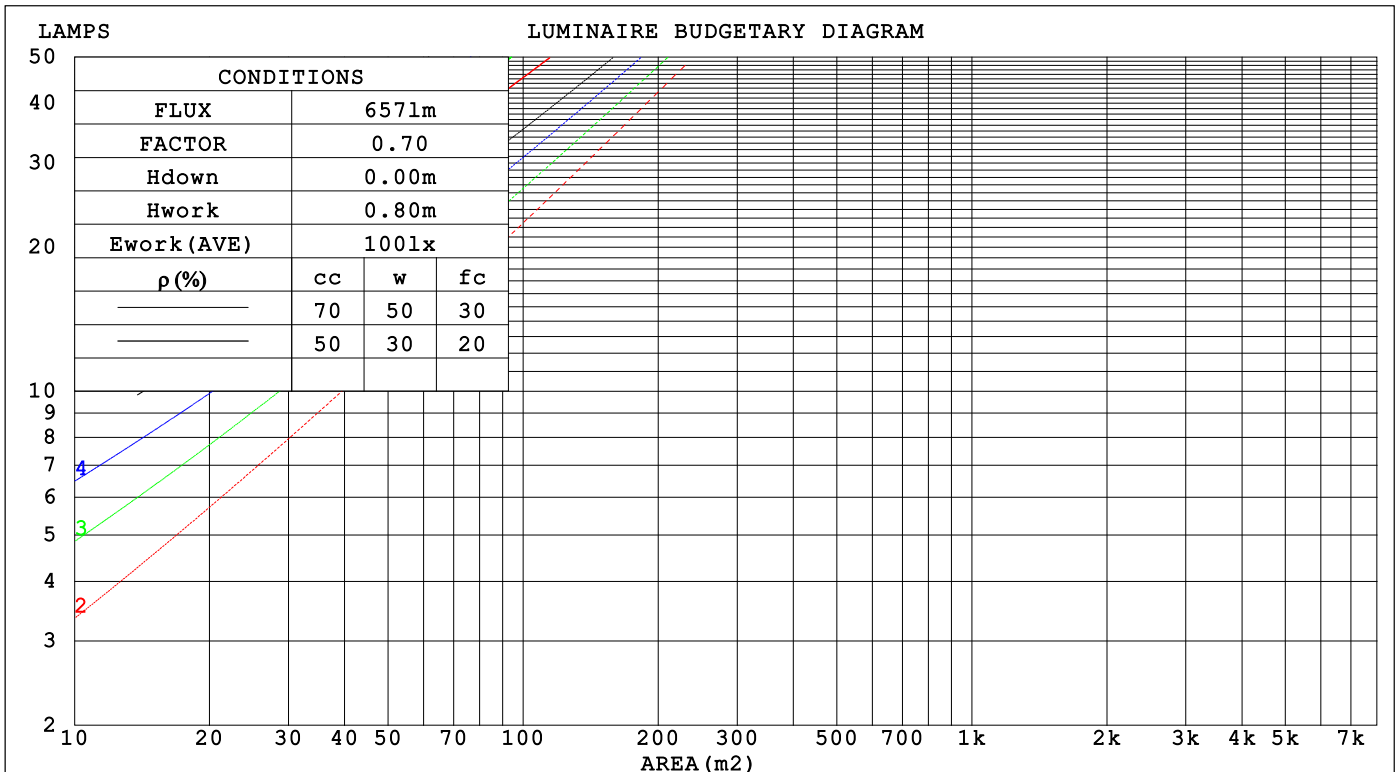

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.36V I:0.1472A P:33.900W PF:0.9579 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5235.86x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.357	.203	.064	.346	.197	.063	.325	.186	.060	.305	.176	.057	.288	.167	.054	
2.0	.317	.174	.053	.307	.169	.052	.288	.160	.050	.271	.152	.048	.255	.144	.045	
3.0	.286	.152	.046	.277	.148	.045	.259	.141	.043	.244	.134	.041	.229	.127	.039	
4.0	.259	.135	.040	.251	.131	.039	.236	.125	.037	.221	.119	.036	.208	.113	.034	
5.0	.237	.121	.035	.230	.118	.034	.216	.112	.033	.203	.107	.032	.191	.102	.031	
6.0	.218	.109	.031	.211	.107	.031	.199	.102	.030	.187	.097	.029	.176	.093	.027	
7.0	.202	.100	.028	.196	.098	.028	.184	.093	.027	.173	.089	.026	.163	.085	.025	
8.0	.188	.092	.026	.182	.090	.025	.172	.086	.024	.162	.082	.024	.152	.078	.023	
9.0	.175	.085	.024	.170	.083	.023	.160	.079	.022	.151	.076	.022	.143	.072	.021	
10.0	.164	.079	.022	.160	.077	.022	.151	.074	.021	.142	.071	.020	.134	.067	.019	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.293	.293	.293	.250	.250	.250	.171	.171	.171	.098	.098	.098	.031	.031	.031	
2.0	.287	.259	.234	.245	.222	.201	.168	.153	.139	.097	.088	.081	.031	.028	.026	
3.0	.279	.236	.199	.239	.203	.172	.164	.140	.120	.095	.082	.070	.030	.026	.023	
4.0	.272	.219	.176	.233	.189	.153	.160	.131	.107	.092	.077	.063	.030	.025	.021	
5.0	.264	.206	.162	.227	.178	.140	.156	.124	.099	.090	.073	.058	.029	.024	.019	
6.0	.257	.196	.151	.220	.170	.132	.152	.118	.093	.088	.070	.055	.028	.023	.018	
7.0	.249	.188	.144	.214	.163	.125	.148	.114	.089	.086	.067	.053	.028	.022	.017	
8.0	.242	.181	.138	.208	.157	.121	.144	.110	.086	.084	.065	.051	.027	.021	.017	
9.0	.236	.176	.134	.203	.152	.117	.140	.107	.083	.082	.063	.050	.026	.021	.016	
10.0	.230	.171	.131	.198	.148	.114	.137	.104	.081	.080	.062	.048	.026	.020	.016	
10.0	.224	.167	.129	.193	.145	.112	.134	.102	.080	.078	.060	.048	.025	.020	.016	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.36V I:0.1472A P:33.900W PF:0.9579 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5235.86x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.4	24.8	23.8	25.2	25.7	21.8	23.2	22.3	23.7	24.1
3H	25.7	27.0	26.2	27.4	28.0	23.3	24.6	23.8	25.0	25.6
4H	26.9	28.1	27.4	28.6	29.2	23.8	25.1	24.3	25.5	26.1
6H	28.2	29.4	28.7	29.9	30.4	24.2	25.3	24.7	25.8	26.4
8H	28.9	30.1	29.5	30.6	31.1	24.3	25.4	24.8	25.9	26.5
12H	29.8	30.8	30.3	31.4	31.9	24.3	25.4	24.8	25.9	26.5
4H 2H	24.0	25.2	24.5	25.7	26.2	22.8	24.0	23.3	24.5	25.1
3H	26.5	27.5	27.0	28.1	28.6	24.5	25.6	25.1	26.1	26.7
4H	27.9	28.8	28.4	29.4	30.0	25.3	26.2	25.8	26.8	27.4
6H	29.4	30.2	29.9	30.8	31.5	25.8	26.7	26.4	27.3	27.9
8H	30.2	31.0	30.8	31.6	32.3	26.0	26.8	26.6	27.4	28.1
12H	31.1	31.9	31.8	32.5	33.2	26.1	26.8	26.7	27.4	28.1
8H 4H	28.2	29.0	28.8	29.6	30.2	26.0	26.9	26.7	27.5	28.1
6H	29.9	30.6	30.6	31.2	31.9	26.9	27.6	27.6	28.2	28.9
8H	30.9	31.6	31.6	32.2	32.9	27.3	27.9	27.9	28.5	29.3
12H	32.1	32.7	32.8	33.3	34.1	27.5	28.1	28.2	28.7	29.5
12H 4H	28.2	28.9	28.8	29.5	30.2	26.2	27.0	26.9	27.6	28.3
6H	30.0	30.6	30.7	31.3	32.0	27.3	27.9	28.0	28.6	29.3
8H	31.1	31.7	31.8	32.3	33.1	27.8	28.4	28.5	29.0	29.8

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.1 / - 0.1	+ 0.1 / - 0.2
1.5H	+ 0.2 / - 0.2	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.5

CIE Pub.117, 5236 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.8)
 Area: 0.070821 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.36V I:0.1472A P:33.900W PF:0.9579 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5235.86x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	51	39	32	50	38	31	48	37	31	24
0.80	60	48	40	59	47	40	56	46	39	31
1.00	68	56	48	66	55	47	63	56	46	38
1.25	75	63	55	73	62	54	69	60	53	44
1.50	80	69	61	78	67	60	73	65	58	48
2.00	87	77	69	85	75	68	79	72	66	55
2.50	92	82	75	89	80	73	83	76	70	59
3.00	95	87	80	92	84	78	86	80	75	63
4.00	100	93	87	96	90	84	90	85	80	67
5.00	103	96	91	99	93	89	92	88	84	70
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.36V I:0.1472A P:33.900W PF:0.9579 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5235.86x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

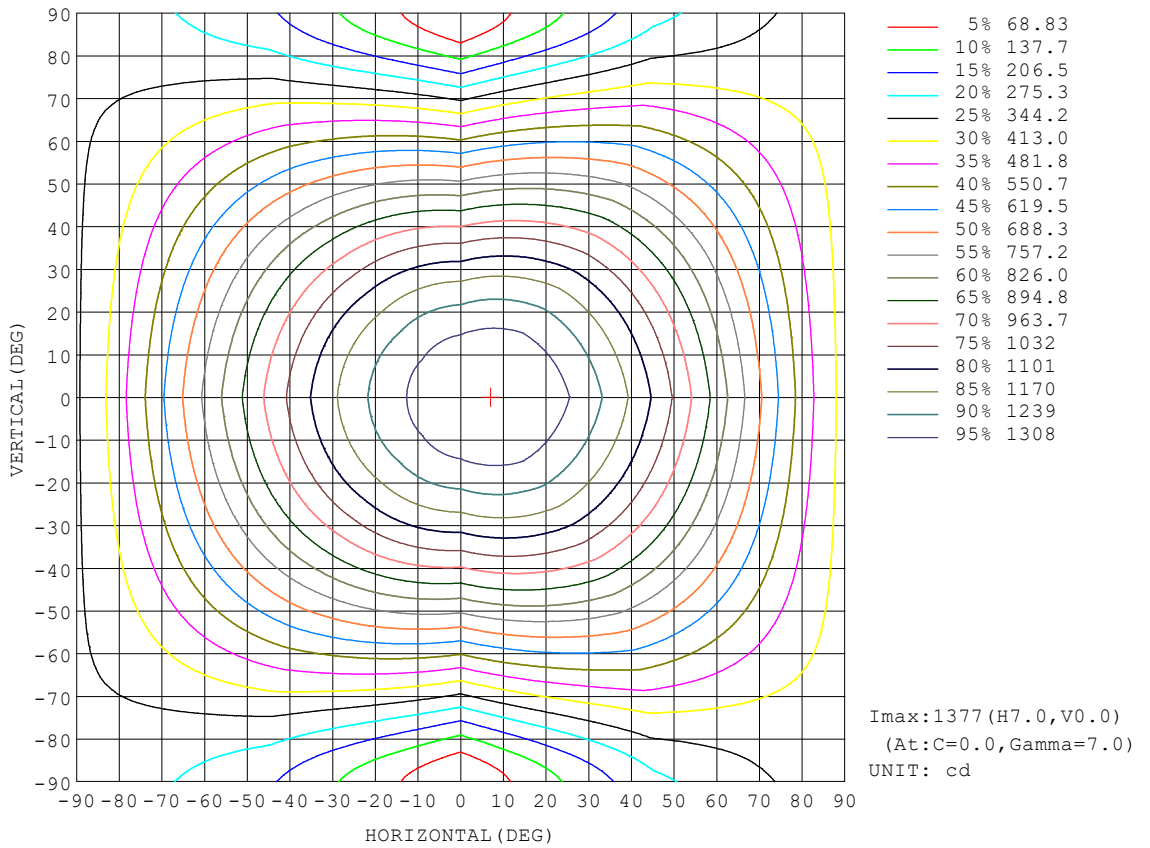


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.36V I:0.1472A P:33.900W PF:0.9579 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5235.86x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

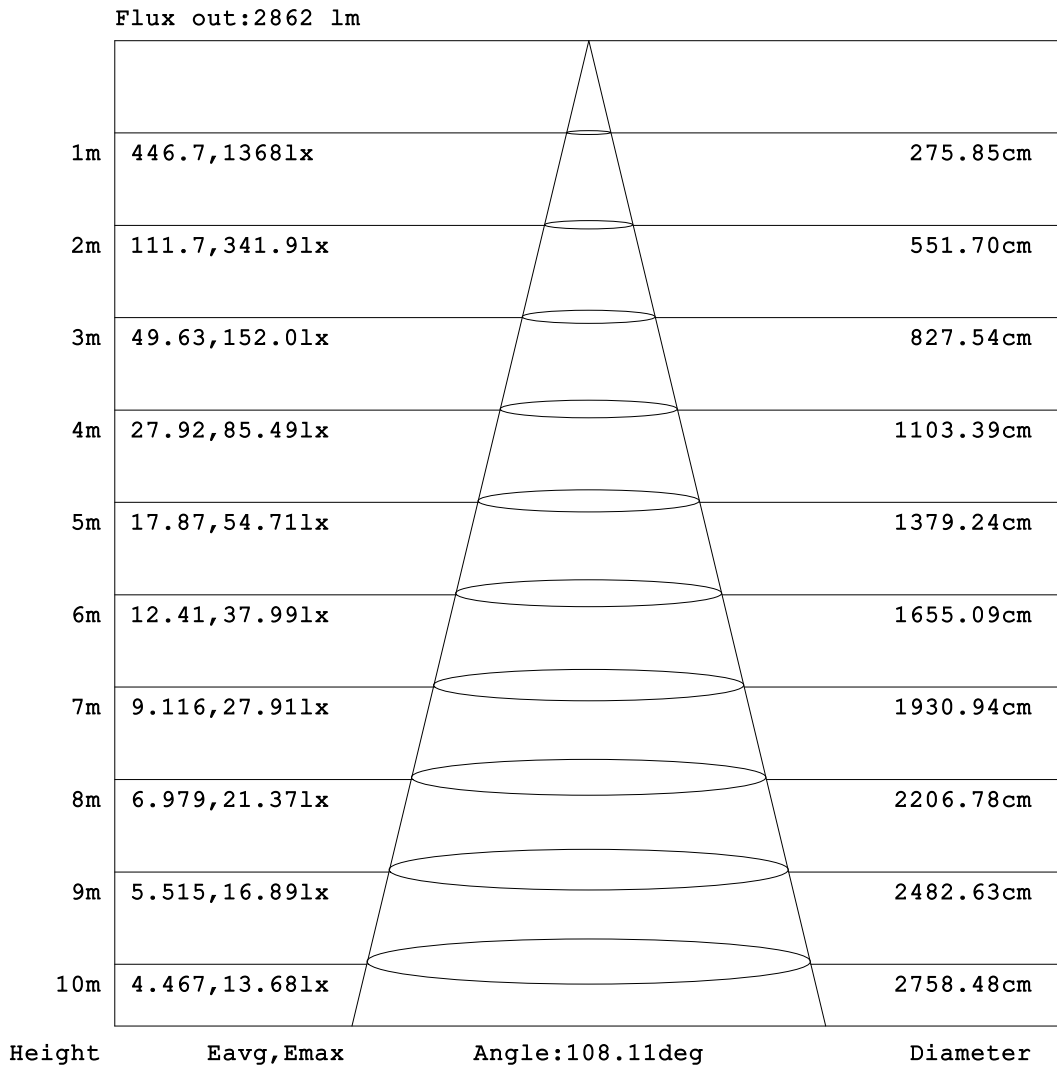


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.36V I:0.1472A P:33.900W PF:0.9579 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5235.86x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

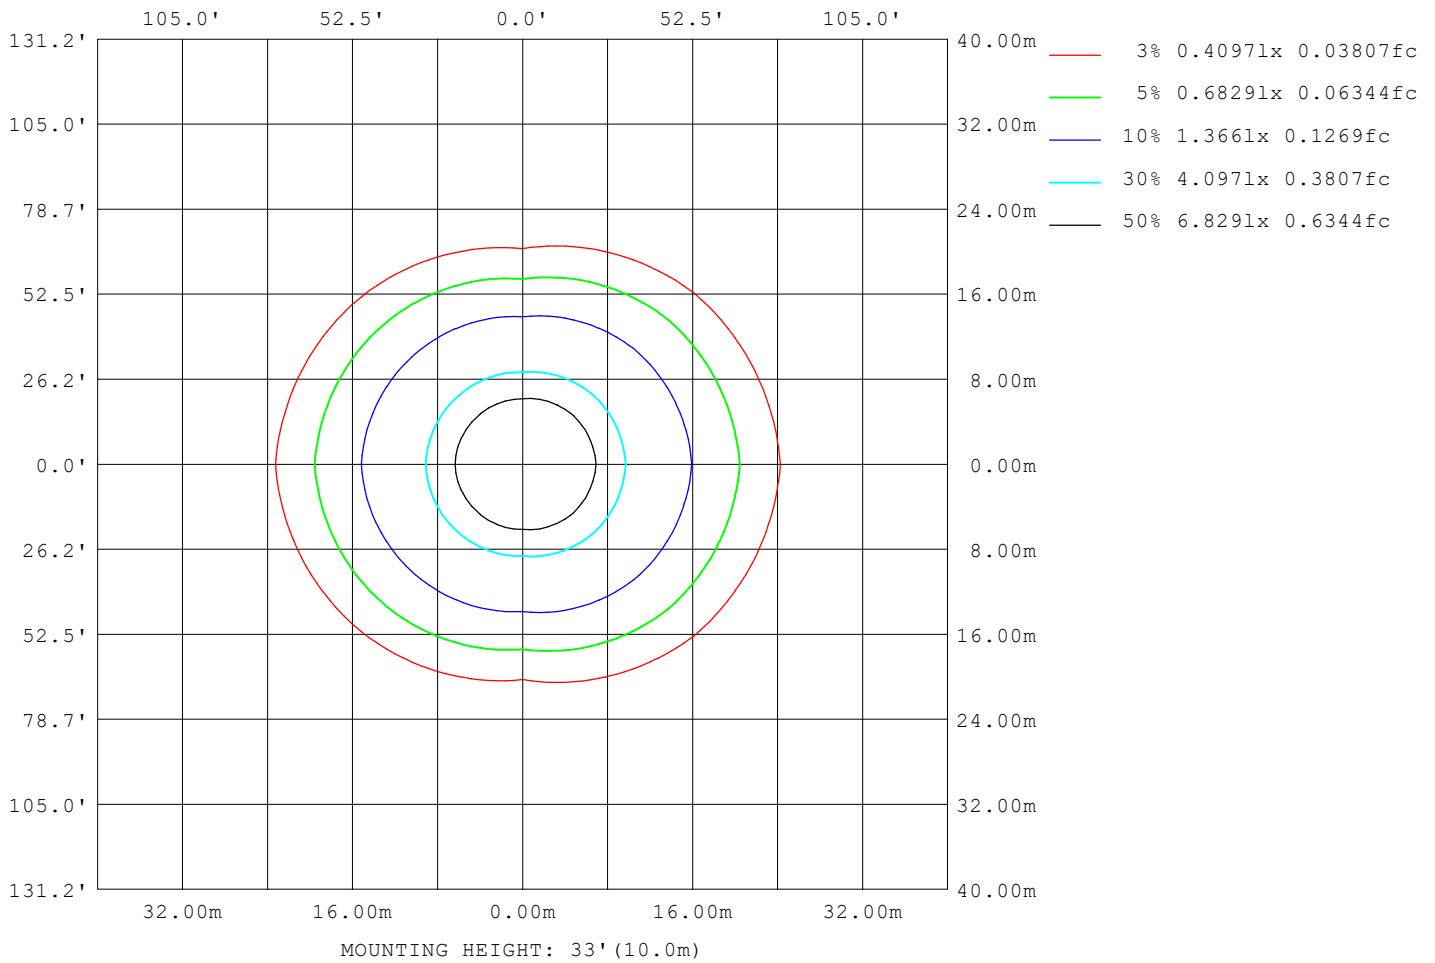

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.36V I:0.1472A P:33.900W PF:0.9579 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5235.86x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	24658
L_0~180 (75) av	31209
L_0~180 (85) av	67920
L_90~270 (65) av	14836
L_90~270 (75) av	12124
L_90~270 (85) av	6500
L_45 (65) av	20667
L_45 (75) av	24039
L_45 (85) av	46291

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

Planar Illuminance Curve

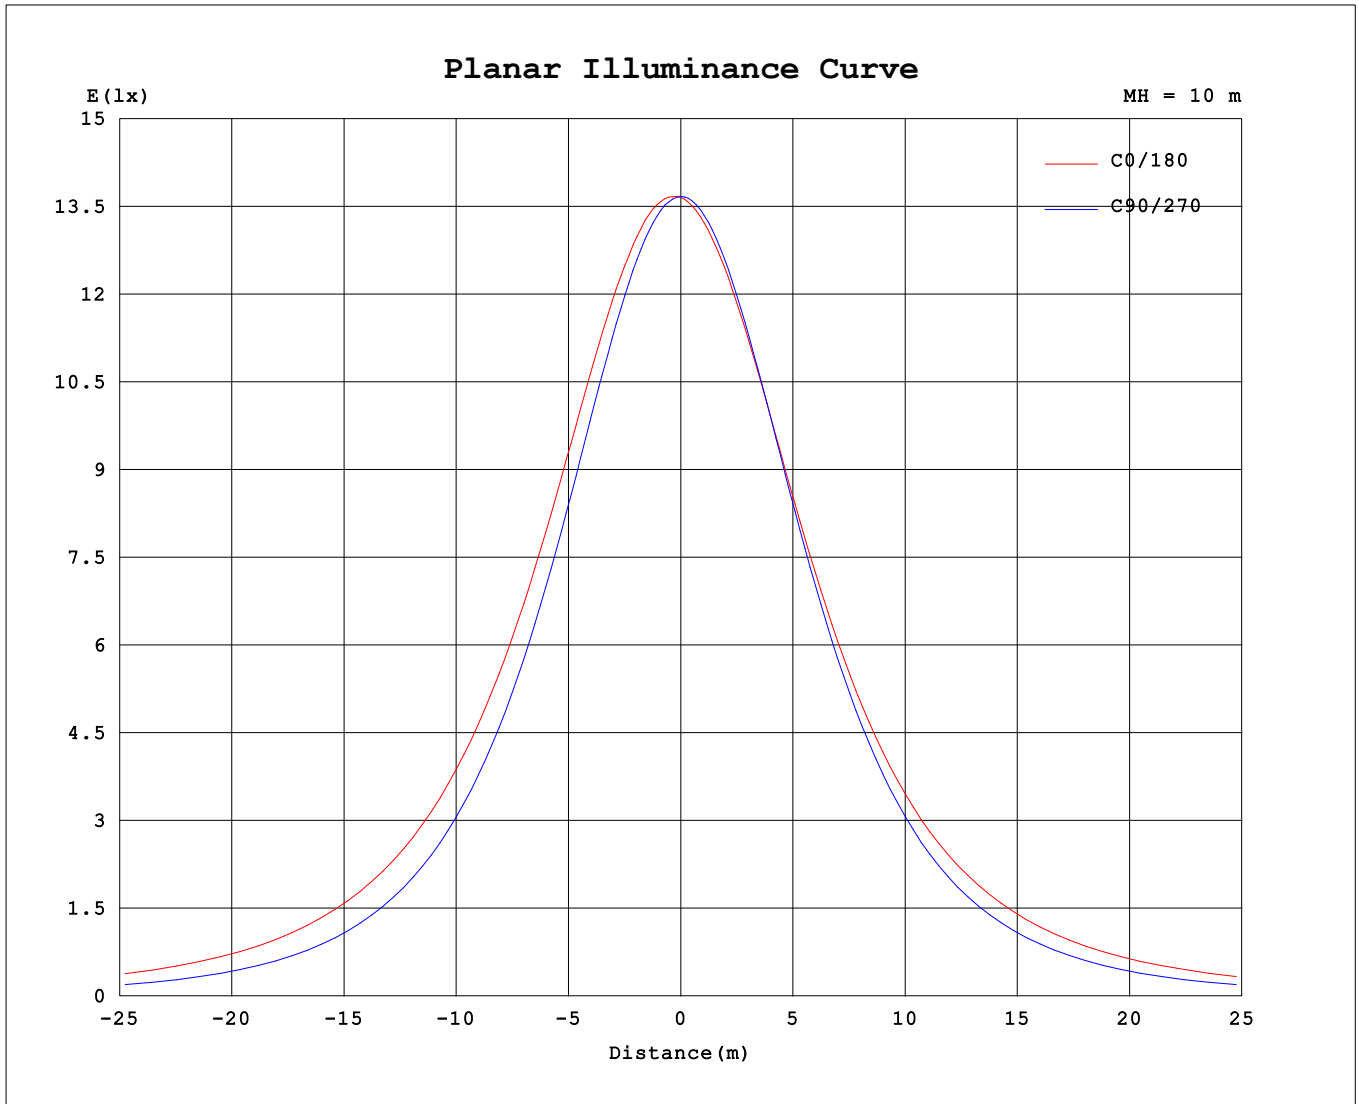

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.36V I:0.1472A P:33.900W PF:0.9579 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5235.86x1 lm		
NAME: E-B40W	TYPE: 35W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315											
0	1366	1366	1366	1366	1366	1366	1366	1366											
5	1375	1370	1359	1350	1349	1351	1359	1372											
10	1375	1364	1337	1325	1324	1325	1338	1364											
15	1365	1345	1302	1290	1293	1290	1304	1345											
20	1344	1315	1254	1246	1255	1246	1257	1314											
25	1312	1272	1194	1193	1209	1194	1198	1271											
30	1270	1218	1125	1133	1159	1134	1128	1218											
35	1219	1156	1046	1066	1104	1066	1050	1156											
40	1162	1086	959	993	1044	994	962	1085											
45	1096	1009	865	916	979	917	869	1008											
50	1026	928	766	835	912	835	769	925											
55	951	840	662	752	841	752	664	838											
60	869	751	554	667	768	667	556	748											
65	785	659	443	581	691	580	445	655											
70	698	566	332	494	612	493	332	562											
75	610	474	222	409	534	409	222	470											
80	525	388	121	330	457	329	121	383											
85	450	312	40.3	262	389	262	39.9	307											
90	393	259	2.70	215	338	217	2.50	255											
95	353	224	3.43	191	308	192	3.09	221											
100	316	195	5.09	173	282	173	5.15	192											
105	281	171	7.10	156	258	156	7.34	167											
110	251	149	9.25	141	234	141	9.75	146											
115	222	123	11.4	128	212	128	12.2	123											
120	196	104	13.5	116	191	116	14.6	103											
125	172	86.3	15.5	105	172	105	17.0	87.2											
130	150	71.9	17.4	95.6	153	95.8	19.1	72.8											
135	130	61.1	19.1	86.6	135	87.0	21.2	61.4											
140	112	52.1	20.8	78.1	119	78.6	23.0	52.6											
145	95.7	44.2	22.8	70.3	103	70.8	24.7	44.7											
150	80.8	37.8	26.3	63.2	87.4	63.7	26.8	38.4											
155	67.1	32.8	29.6	56.5	72.0	56.5	30.0	33.5											
160	55.1	31.0	32.5	50.2	62.1	48.6	33.0	30.5											
165	45.1	29.0	35.1	42.3	51.1	42.0	35.9	28.7											
170	35.5	27.7	37.3	36.6	39.9	36.1	38.0	27.6											
175	21.7	32.8	39.0	39.1	22.8	38.4	39.4	33.3											
180	25.4	39.8	40.3	40.0	25.4	39.8	40.3	40.0											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks: