
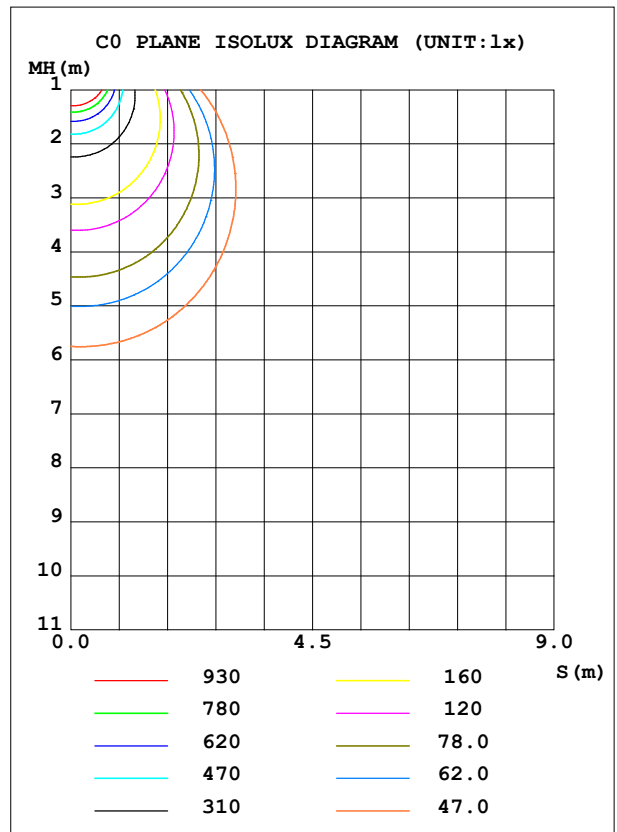


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.37V I:0.1698A P:39.241W PF:0.9615 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5960.79x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	E-B40W	Imax (cd)	1568	S/MH (C0/180)	1.38
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	5960.8	η UP, DN (C0-180)	6.8, 44.0
NOMINAL FLUX (lm)	5960.79	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	6.6, 42.6
LAMPS INSIDE	1	η up (%)	13.4	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	240	η down (%)	86.6	CIBSE SHR MAX	1.50

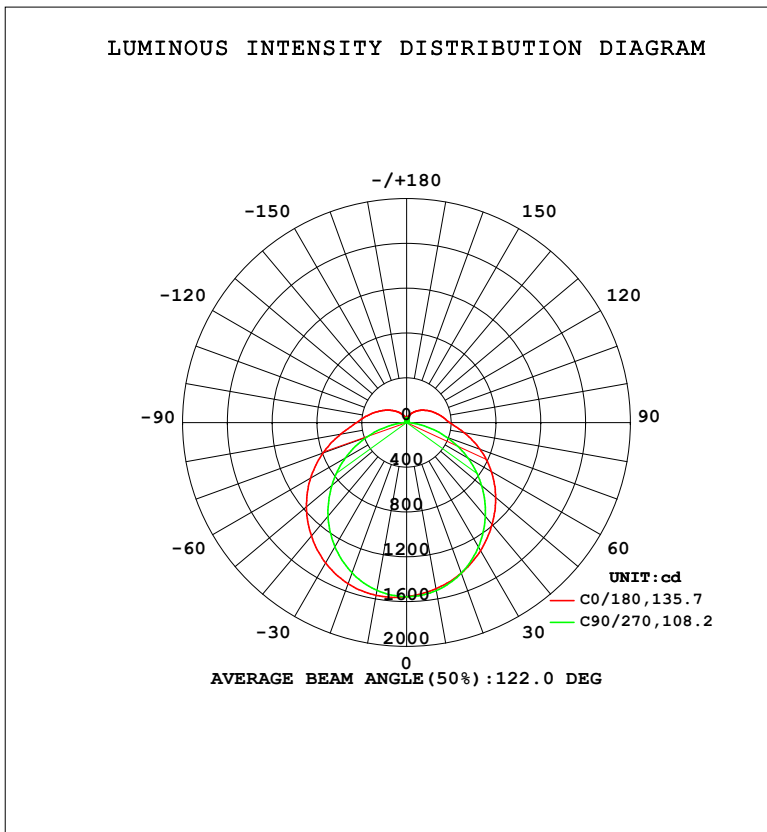

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1567	1552	1522	1508	1508	1509	1524	1552	0- 10	147.3	147.3	2.47,2.47
20	1532	1495	1428	1418	1430	1419	1431	1495	10- 20	423.3	570.5	9.57,9.57
30	1448	1387	1281	1289	1321	1290	1285	1386	20- 30	646.0	1216	20.4,20.4
40	1323	1237	1092	1130	1188	1131	1096	1235	30- 40	789.5	2006	33.7,33.7
50	1169	1056	872.6	949.5	1039	951.1	875.9	1053	40- 50	841.4	2847	47.8,47.8
60	990.5	855.3	631.6	758.4	874.2	759.2	633.0	851.2	50- 60	802.2	3650	61.2,61.2
70	794.6	645.3	378.1	561.6	698.0	561.3	378.3	639.7	60- 70	682.0	4331	72.7,72.7
80	598.0	441.7	137.5	375.4	520.9	374.8	137.5	436.1	70- 80	504.7	4836	81.1,81.1
90	448.1	294.0	3.073	244.6	385.4	246.2	2.832	289.7	80- 90	325.3	5162	86.6,86.6
100	359.3	222.1	5.774	195.4	321.8	196.8	5.860	218.8	90-100	232.9	5394	90.5,90.5
110	285.1	169.4	10.51	160.0	267.0	160.5	11.08	166.8	100-110	181.7	5576	93.5,93.5
120	223.0	118.8	15.31	131.6	217.4	132.0	16.63	117.6	110-120	136.4	5712	95.8,95.8
130	171.0	82.16	19.72	108.5	173.7	108.7	21.72	82.98	120-130	97.30	5810	97.5,97.5
140	127.7	59.43	23.54	88.73	135.2	89.25	26.10	59.90	130-140	66.65	5876	98.6,98.6
150	91.80	43.15	29.83	71.72	100.7	72.27	30.47	43.73	140-150	42.87	5919	99.3,99.3
160	62.65	35.31	36.84	56.93	69.25	56.62	37.52	34.76	150-160	25.25	5945	99.7,99.7
170	40.35	31.52	42.29	41.49	45.50	40.87	43.12	31.41	160-170	12.61	5957	99.9,99.9
180	28.85	45.18	45.73	45.35	28.87	45.22	45.73	45.38	170-180	3.607	5961	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2426 lm

%lum = 40.7%

%lamp = 40.7%

Conical surface Flux(120deg): 3649.5 lm

%lum = 61.2%


%lamp = 61.2%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.37V I:0.1698A P:39.241W PF:0.9615 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5960.79x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

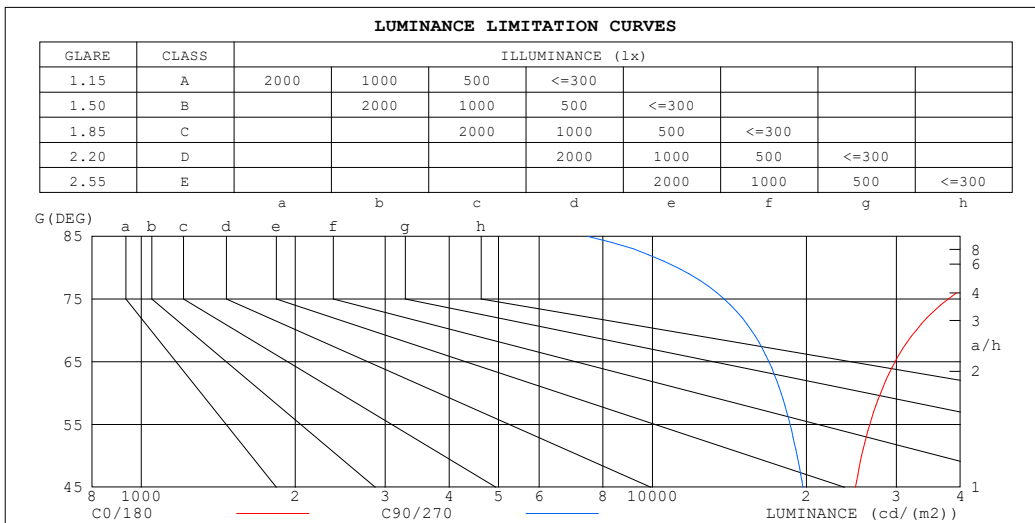

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	82832	7453
80	48589	11187
75	37906	13805
70	32783	15615
65	29831	16896
60	27952	17843
55	26630	18581
50	25655	19175
45	24953	19693


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.37V I:0.1698A P:39.241W PF:0.9615 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5960.79x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.96	.96	.96	.90	.90	.90	.87
1.0	.98	.93	.89	.95	.90	.86	.88	.84	.81	.82	.79	.76	.76	.74	.71	.68
2.0	.85	.77	.71	.81	.75	.69	.76	.70	.65	.70	.66	.62	.65	.62	.58	.55
3.0	.74	.65	.58	.71	.63	.57	.66	.59	.54	.62	.56	.51	.57	.53	.49	.46
4.0	.65	.56	.49	.63	.54	.48	.58	.51	.45	.54	.48	.43	.51	.46	.41	.39
5.0	.58	.48	.42	.56	.47	.41	.52	.45	.39	.49	.42	.37	.46	.40	.36	.33
6.0	.52	.43	.36	.50	.42	.35	.47	.39	.34	.44	.37	.33	.41	.36	.31	.29
7.0	.47	.38	.32	.45	.37	.31	.43	.35	.30	.40	.34	.29	.38	.32	.28	.25
8.0	.43	.34	.28	.41	.33	.27	.39	.32	.27	.37	.30	.26	.34	.29	.25	.23
9.0	.39	.31	.25	.38	.30	.25	.36	.29	.24	.34	.27	.23	.32	.26	.22	.20
10.0	.36	.28	.23	.35	.27	.22	.33	.26	.22	.31	.25	.21	.29	.24	.20	.18

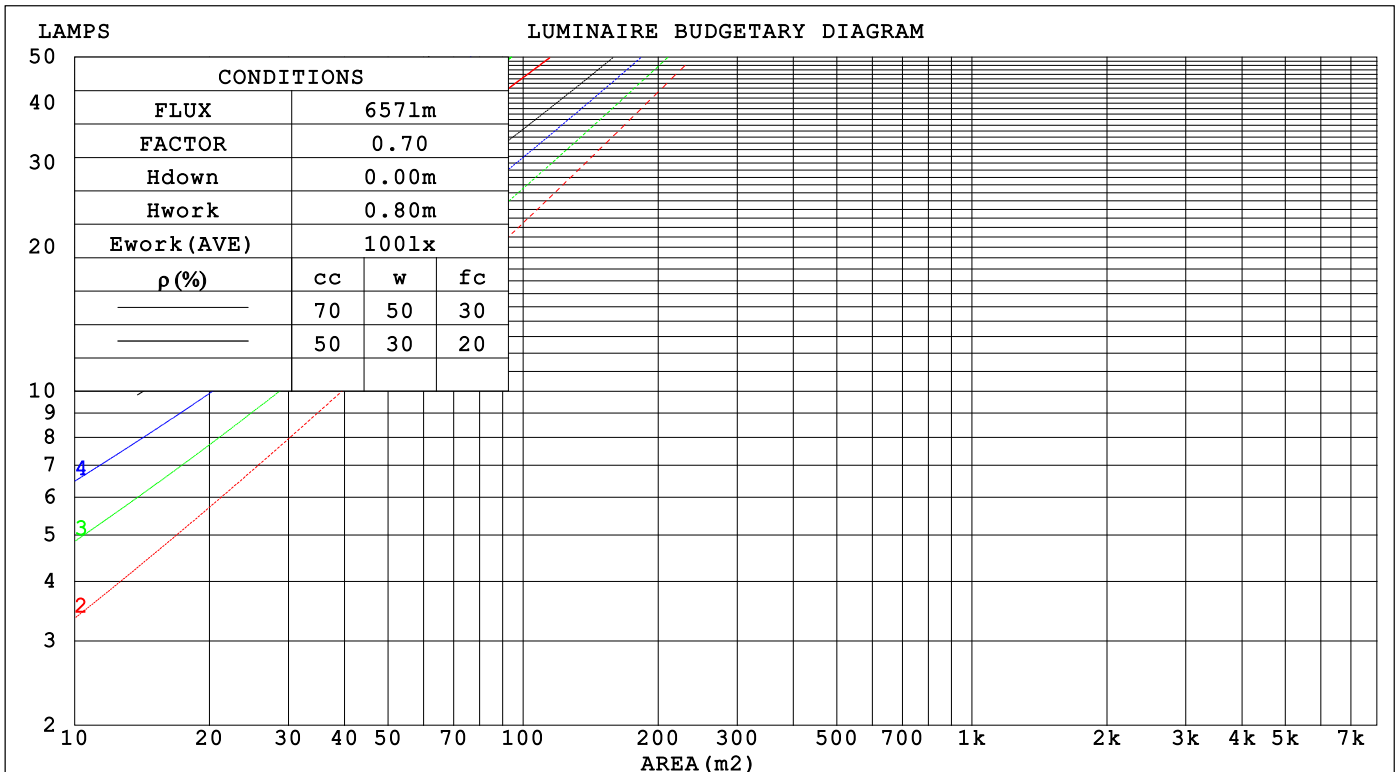

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.37V I:0.1698A P:39.241W PF:0.9615 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5960.79x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.357	.203	.064	.346	.197	.063	.325	.186	.060	.305	.176	.057	.288	.167	.054	
2.0	.317	.174	.053	.307	.169	.052	.288	.160	.050	.271	.152	.048	.255	.144	.045	
3.0	.286	.152	.046	.277	.148	.045	.259	.141	.043	.244	.134	.041	.229	.127	.039	
4.0	.259	.135	.040	.251	.131	.039	.236	.125	.037	.221	.119	.036	.208	.113	.034	
5.0	.237	.121	.035	.230	.118	.034	.216	.112	.033	.203	.107	.032	.191	.102	.031	
6.0	.218	.109	.031	.211	.107	.031	.199	.102	.030	.187	.097	.029	.176	.093	.027	
7.0	.202	.100	.028	.196	.098	.028	.184	.093	.027	.173	.089	.026	.163	.085	.025	
8.0	.188	.092	.026	.182	.090	.025	.172	.086	.024	.162	.082	.024	.152	.078	.023	
9.0	.175	.085	.024	.170	.083	.023	.160	.079	.022	.151	.076	.022	.143	.072	.021	
10.0	.164	.079	.022	.160	.077	.022	.151	.074	.021	.142	.071	.020	.134	.067	.019	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.293	.293	.293	.250	.250	.250	.171	.171	.171	.098	.098	.098	.031	.031	.031	
2.0	.287	.259	.234	.245	.222	.201	.168	.153	.139	.097	.088	.081	.031	.028	.026	
3.0	.279	.235	.199	.239	.203	.172	.164	.140	.120	.095	.082	.070	.030	.026	.023	
4.0	.272	.219	.176	.233	.189	.153	.160	.131	.107	.092	.077	.063	.030	.025	.021	
5.0	.264	.206	.162	.227	.178	.140	.156	.124	.099	.090	.073	.058	.029	.024	.019	
6.0	.256	.196	.151	.220	.170	.132	.152	.118	.093	.088	.070	.055	.028	.023	.018	
7.0	.249	.188	.144	.214	.163	.125	.148	.114	.089	.086	.067	.053	.028	.022	.017	
8.0	.242	.181	.138	.208	.157	.121	.144	.110	.085	.084	.065	.051	.027	.021	.017	
9.0	.236	.176	.134	.203	.152	.117	.140	.107	.083	.082	.063	.050	.026	.021	.016	
10.0	.229	.171	.131	.198	.148	.114	.137	.104	.081	.080	.062	.048	.026	.020	.016	
10.0	.224	.167	.129	.193	.145	.112	.134	.102	.080	.078	.060	.048	.025	.020	.016	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.37V I:0.1698A P:39.241W PF:0.9615 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5960.79x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.8	25.2	24.3	25.7	26.1	22.3	23.7	22.7	24.1	24.6
3H	26.1	27.4	26.6	27.9	28.4	23.7	25.0	24.2	25.5	26.0
4H	27.4	28.6	27.9	29.1	29.6	24.3	25.5	24.8	26.0	26.5
6H	28.7	29.8	29.2	30.3	30.9	24.6	25.8	25.2	26.3	26.9
8H	29.4	30.5	29.9	31.0	31.6	24.7	25.8	25.3	26.4	26.9
12H	30.2	31.3	30.8	31.8	32.4	24.8	25.8	25.3	26.4	26.9
4H 2H	24.4	25.6	24.9	26.1	26.6	23.3	24.5	23.8	25.0	25.5
3H	26.9	28.0	27.5	28.5	29.1	25.0	26.1	25.5	26.6	27.2
4H	28.3	29.3	28.9	29.8	30.4	25.7	26.7	26.3	27.3	27.9
6H	29.8	30.7	30.4	31.3	31.9	26.3	27.1	26.9	27.7	28.4
8H	30.6	31.5	31.2	32.0	32.7	26.4	27.3	27.0	27.8	28.5
12H	31.6	32.4	32.2	33.0	33.6	26.5	27.3	27.1	27.9	28.6
8H 4H	28.6	29.4	29.2	30.0	30.7	26.5	27.3	27.1	27.9	28.6
6H	30.4	31.1	31.0	31.7	32.4	27.4	28.1	28.0	28.7	29.4
8H	31.4	32.0	32.0	32.6	33.4	27.7	28.3	28.4	29.0	29.7
12H	32.6	33.1	33.3	33.8	34.5	28.0	28.5	28.7	29.2	30.0
12H 4H	28.6	29.4	29.3	30.0	30.7	26.7	27.5	27.3	28.1	28.8
6H	30.5	31.1	31.1	31.7	32.5	27.8	28.4	28.4	29.0	29.8
8H	31.6	32.1	32.3	32.8	33.5	28.3	28.8	28.9	29.5	30.2

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.1 / - 0.1	+ 0.1 / - 0.2
1.5H	+ 0.2 / - 0.2	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.5

CIE Pub.117, 5961 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 6.2)
 Area: 0.070821 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.37V I:0.1698A P:39.241W PF:0.9615 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5960.79x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	51	39	32	50	38	31	48	37	31	24
0.80	60	48	40	59	47	40	56	46	39	31
1.00	68	56	48	66	55	47	63	56	46	38
1.25	75	63	55	73	62	54	69	60	53	44
1.50	80	69	61	78	67	60	73	65	58	48
2.00	87	77	69	85	75	68	79	72	66	55
2.50	92	82	75	89	80	73	83	76	70	59
3.00	95	87	80	92	84	78	86	80	75	63
4.00	100	93	87	96	90	84	90	85	80	67
5.00	103	96	91	99	93	89	92	88	84	70
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.37V I:0.1698A P:39.241W PF:0.9615 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5960.79x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

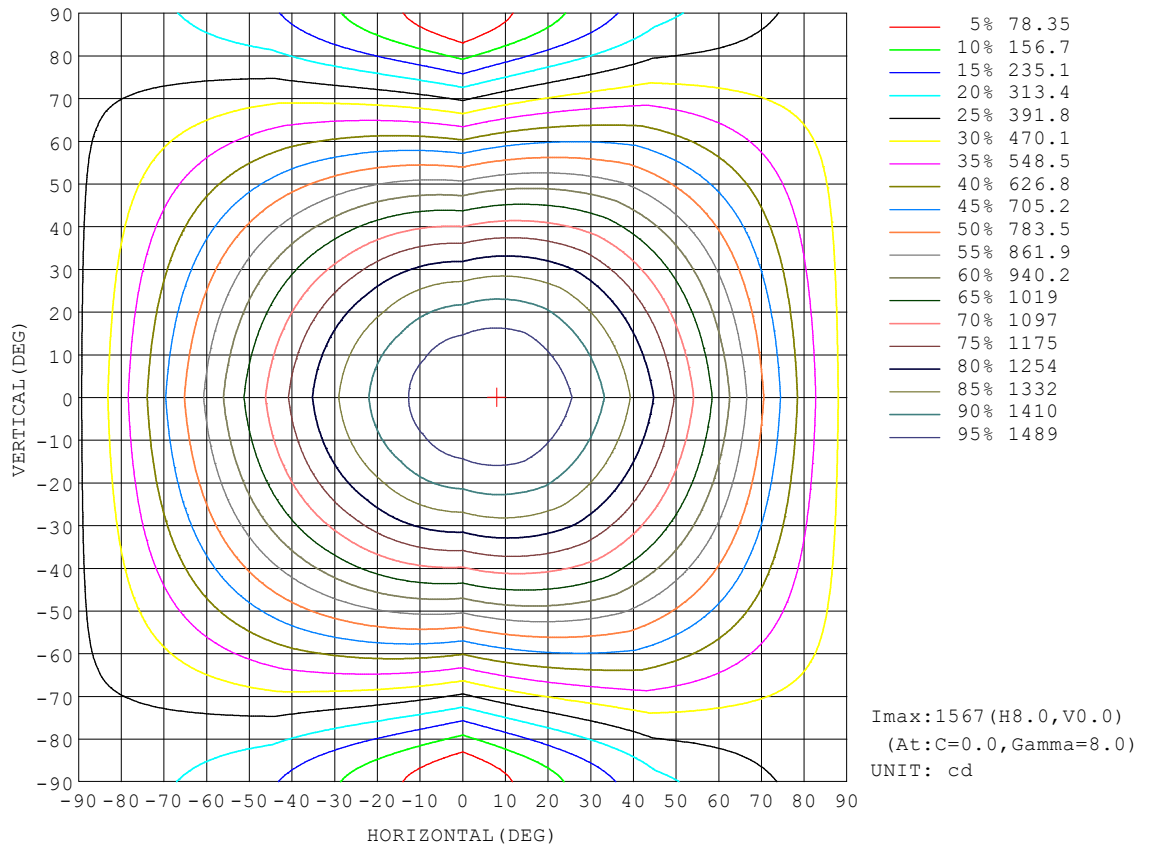


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.37V I:0.1698A P:39.241W PF:0.9615 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5960.79x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

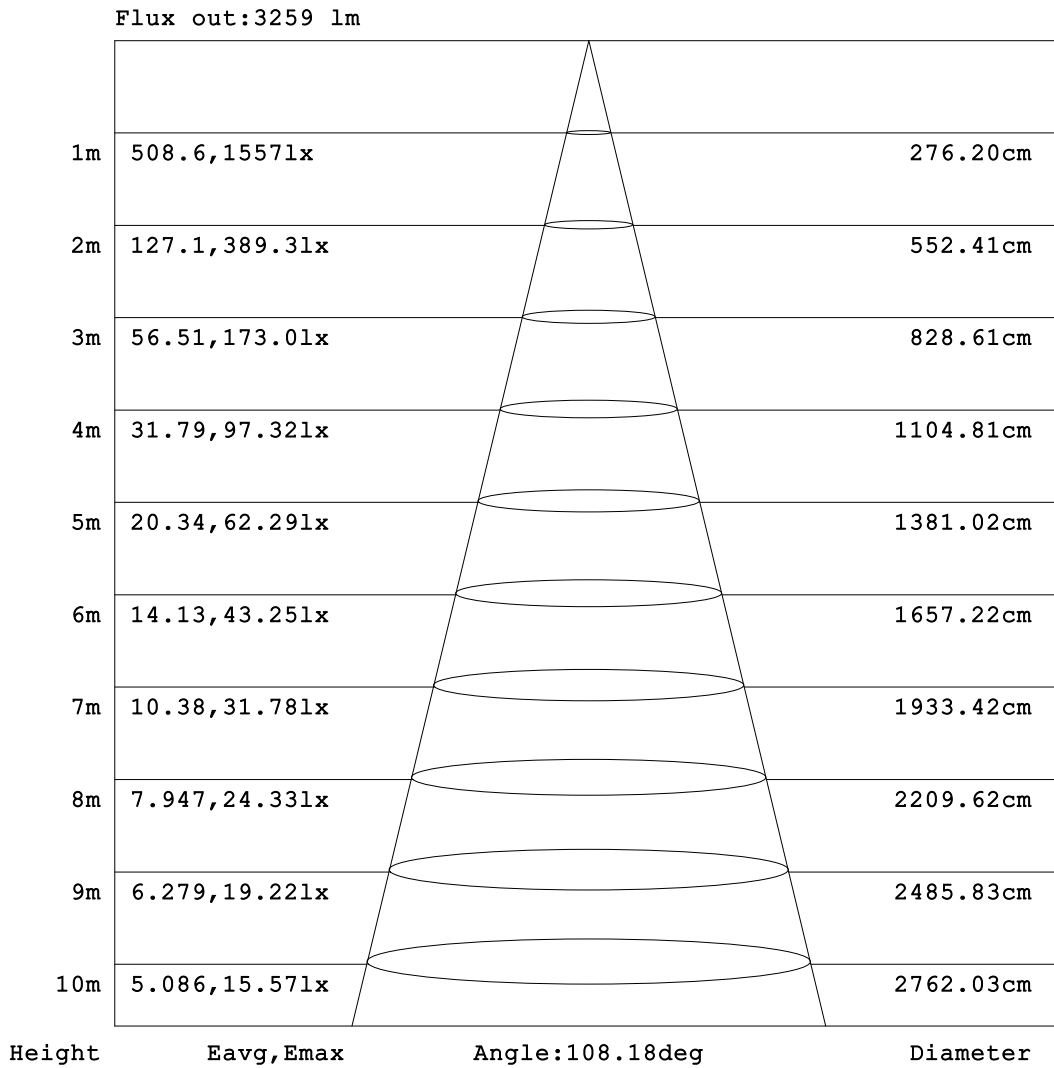


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.37V I:0.1698A P:39.241W PF:0.9615 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5960.79x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

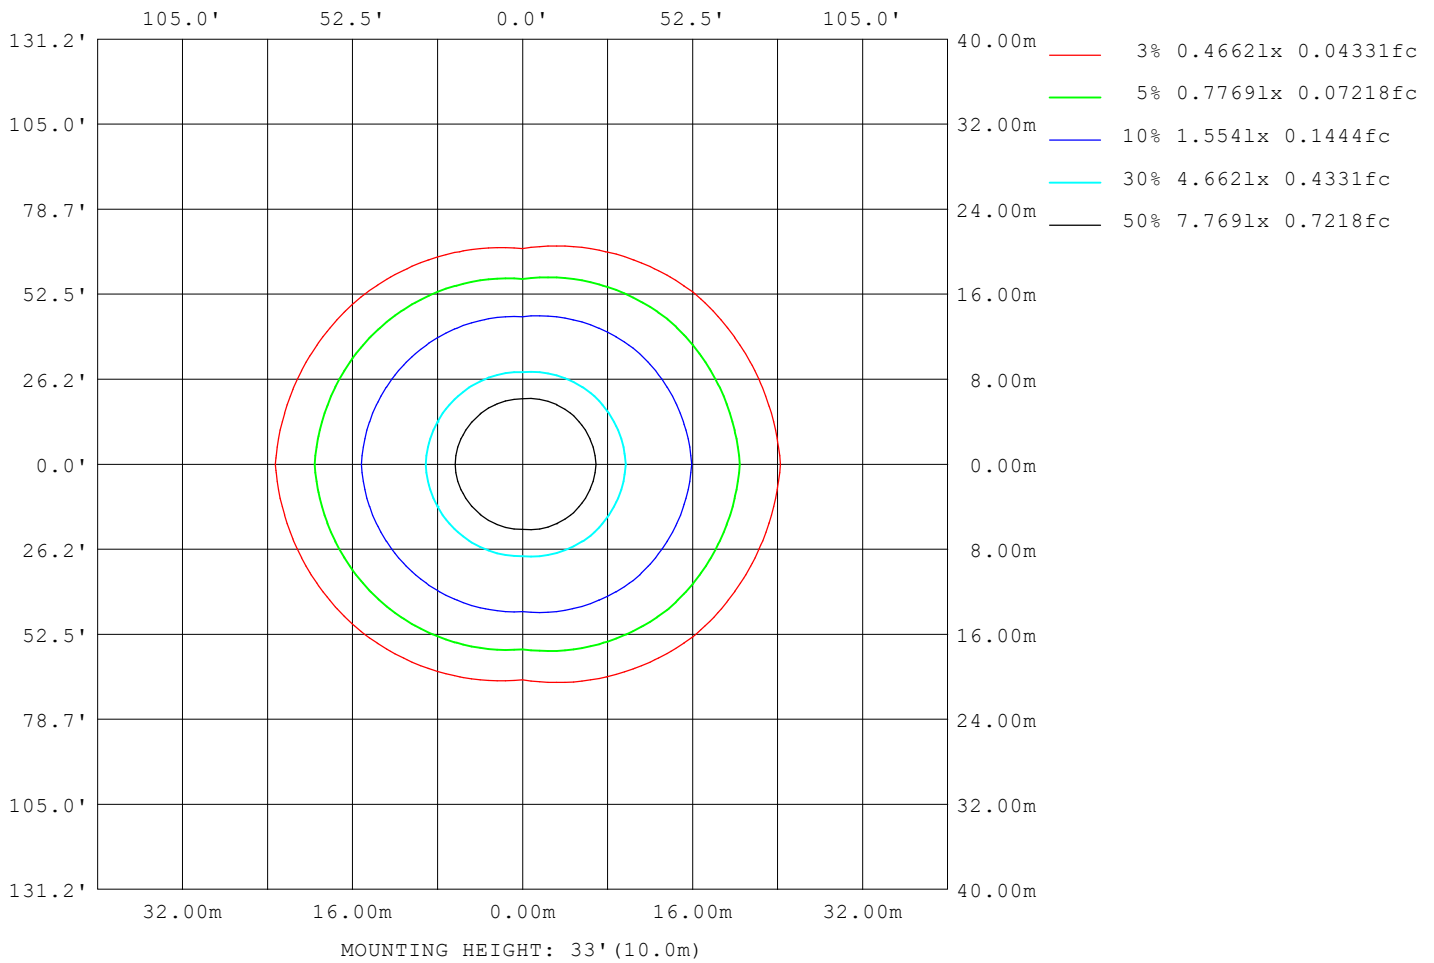

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.37V I:0.1698A P:39.241W PF:0.9615 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5960.79x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	28080
L_0~180 (75) av	35557
L_0~180 (85) av	77318
L_90~270 (65) av	16906
L_90~270 (75) av	13800
L_90~270 (85) av	7416
L_45 (65) av	23528
L_45 (75) av	27363
L_45 (85) av	52628

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

Planar Illuminance Curve

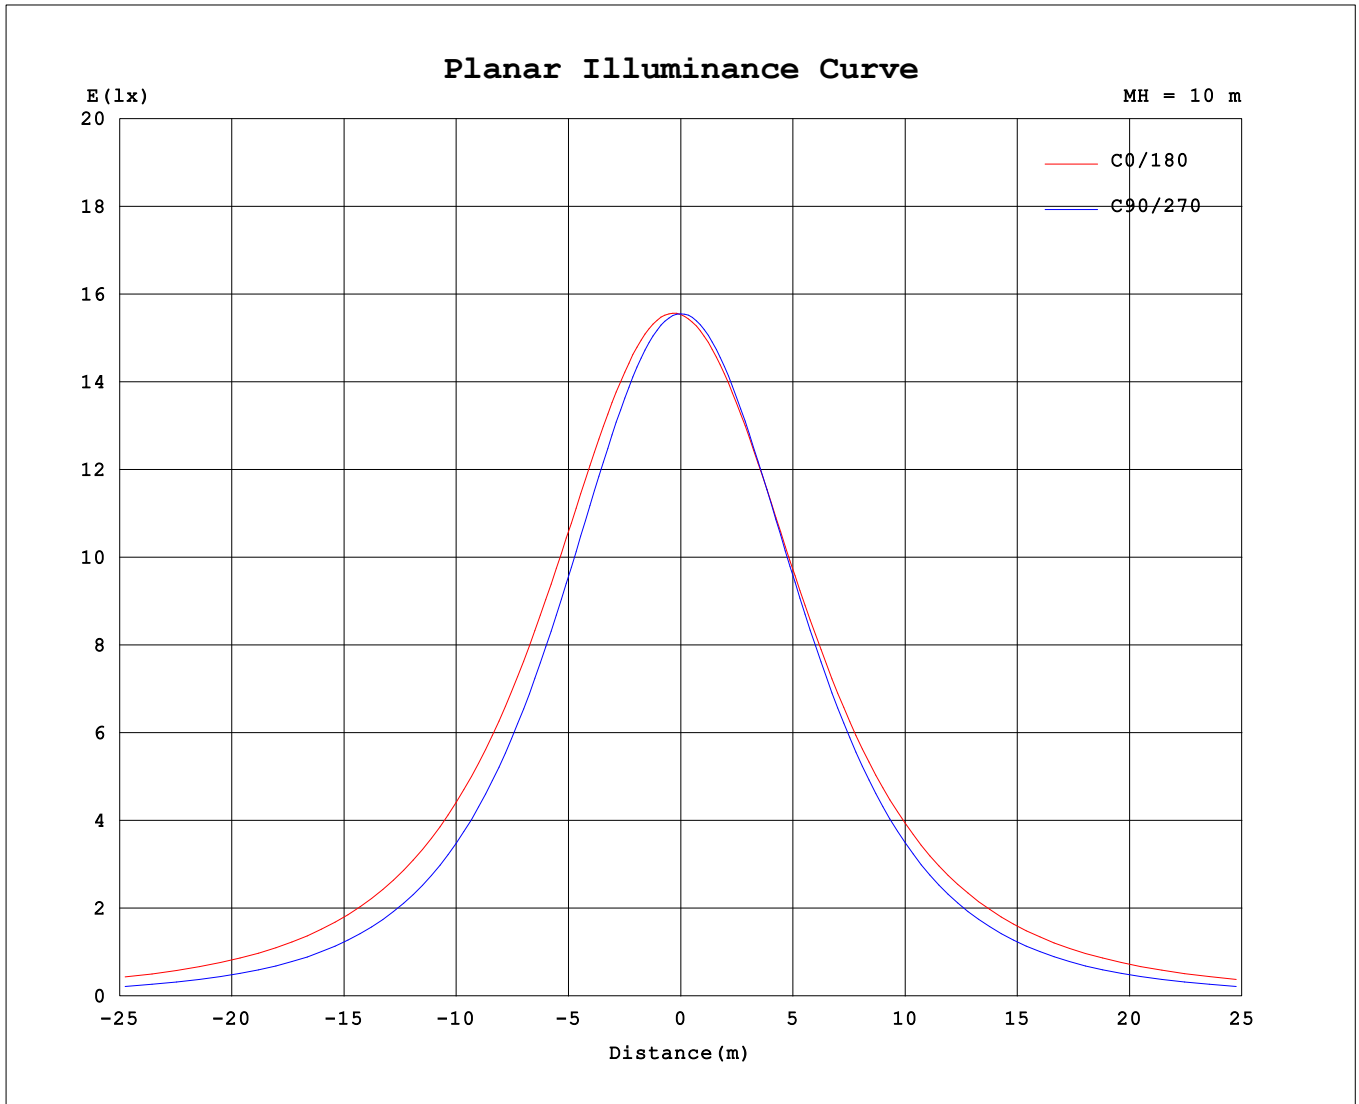

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.37V I:0.1698A P:39.241W PF:0.9615 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5960.79x1 lm		
NAME: E-B40W	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315											
0	1555	1555	1555	1555	1555	1555	1555	1555											
5	1567	1560	1547	1537	1535	1537	1548	1560											
10	1567	1552	1522	1508	1508	1509	1524	1552											
15	1555	1530	1483	1468	1474	1469	1484	1531											
20	1532	1495	1428	1418	1430	1419	1431	1495											
25	1495	1447	1360	1358	1378	1359	1364	1447											
30	1448	1387	1281	1289	1321	1290	1285	1386											
35	1390	1316	1191	1212	1257	1214	1195	1315											
40	1323	1237	1092	1130	1188	1131	1096	1235											
45	1250	1149	986	1042	1116	1043	989	1146											
50	1169	1056	873	950	1039	951	876	1053											
55	1082	957	755	855	958	856	757	954											
60	990	855	632	758	874	759	633	851											
65	893	751	506	660	787	660	506	746											
70	795	645	378	562	698	561	378	640											
75	695	541	253	465	608	465	253	535											
80	598	442	138	375	521	375	138	436											
85	512	355	46.0	297	443	298	45.6	350											
90	448	294	3.07	245	385	246	2.83	290											
95	401	255	3.88	217	351	219	3.52	251											
100	359	222	5.77	195	322	197	5.86	219											
105	320	194	8.08	177	294	178	8.33	191											
110	285	169	10.5	160	267	160	11.1	167											
115	253	140	13.0	145	242	145	13.9	140											
120	223	119	15.3	132	217	132	16.6	118											
125	196	98.4	17.6	120	195	120	19.3	99.0											
130	171	82.2	19.7	109	174	109	21.7	83.0											
135	148	69.8	21.7	98.3	154	98.4	24.0	70.0											
140	128	59.4	23.5	88.7	135	89.2	26.1	59.9											
145	109	50.5	25.9	79.9	117	80.4	28.0	51.0											
150	91.8	43.2	29.8	71.7	101	72.3	30.5	43.7											
155	76.3	37.4	33.5	64.2	84.1	64.3	33.9	38.2											
160	62.6	35.3	36.8	56.9	69.2	56.6	37.5	34.8											
165	51.4	33.0	39.8	48.0	58.4	46.8	40.7	32.6											
170	40.3	31.5	42.3	41.5	45.5	40.9	43.1	31.4											
175	24.7	37.2	44.3	44.3	26.0	43.7	44.7	37.8											
180	28.9	45.2	45.7	45.3	28.9	45.2	45.7	45.4											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks: