
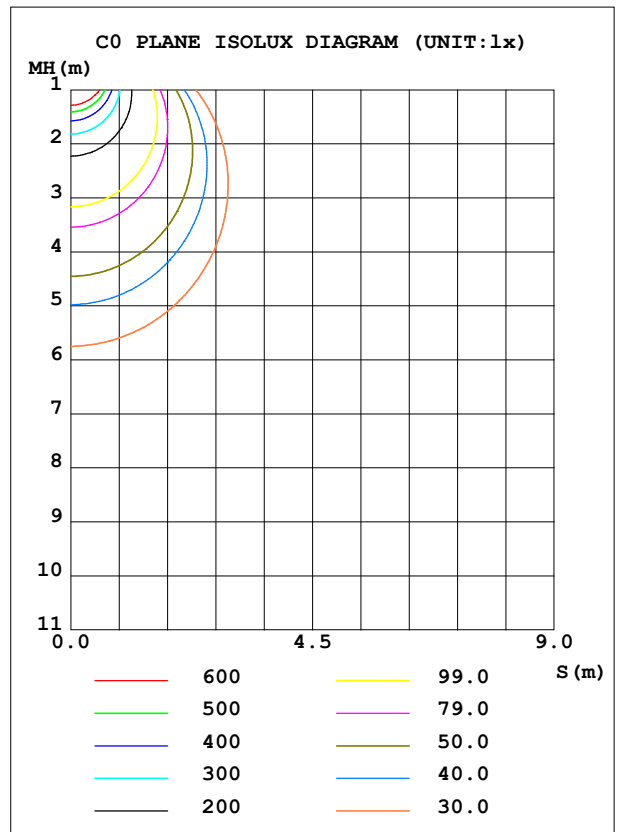


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.27V I:0.1363A P:29.149W PF:0.8903 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3749.82x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	E-B40W-E	Imax (cd)	992.1	S/MH (C0/180)	1.29
NOMINAL POWER (W)	25	LOR (%)	100.0	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	3749.8	η UP, DN (C0-180)	6.4, 43.1
NOMINAL FLUX (lm)	3749.82	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	6.5, 43.9
LAMPS INSIDE	1	η up (%)	13.0	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	240	η down (%)	87.0	CIBSE SHR MAX	1.50

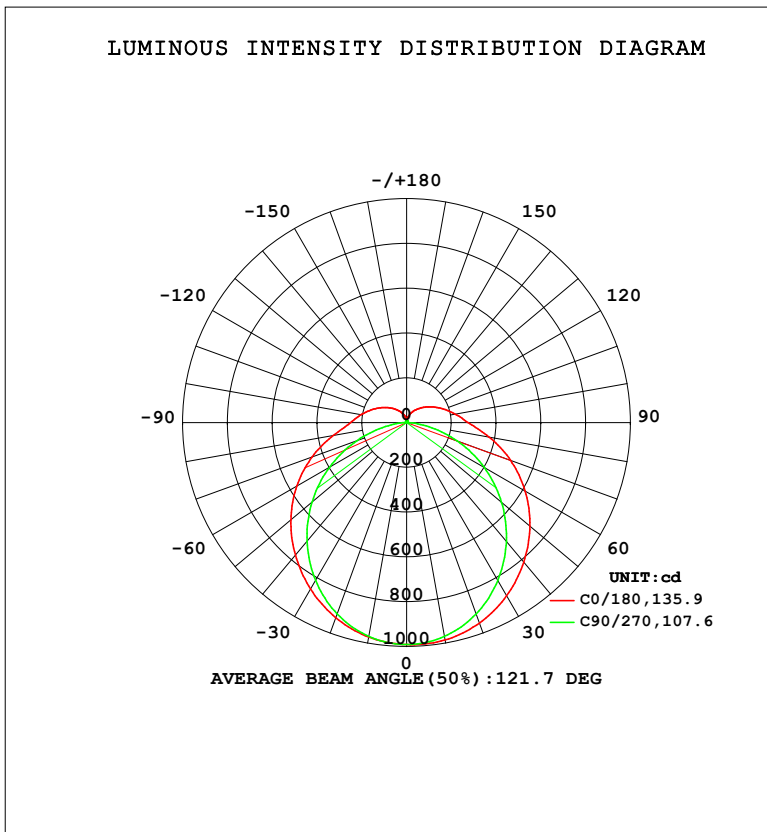

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	972.5	970.6	970.0	979.9	985.8	979.4	970.1	969.6	0- 10	93.83	93.83	2.5,2.5
20	927.3	918.2	909.2	935.4	952.5	934.1	909.3	916.3	10- 20	269.3	363.1	9.68,9.68
30	858.3	837.3	813.9	861.0	893.3	859.6	814.6	834.5	20- 30	409.9	773.0	20.6,20.6
40	772.8	734.7	692.0	764.1	813.7	762.5	693.5	731.6	30- 40	499.8	1273	33.9,33.9
50	675.0	617.7	551.4	650.2	719.0	649.5	553.7	614.4	40- 50	531.7	1804	48.1,48.1
60	566.3	491.9	397.3	525.9	611.5	526.0	401.0	488.4	50- 60	506.3	2311	61.6,61.6
70	449.2	362.1	235.6	396.4	494.4	397.3	240.9	358.9	60- 70	430.0	2741	73.1,73.1
80	332.3	240.2	83.71	271.0	374.1	272.4	88.98	237.5	70- 80	317.9	3059	81.6,81.6
90	250.7	161.0	1.669	178.8	275.0	178.2	1.506	157.4	80- 90	204.4	3263	87,87
100	207.0	127.0	2.570	136.0	221.9	135.9	2.284	123.8	90-100	146.5	3410	90.9,90.9
110	168.1	100.8	3.565	105.8	177.7	105.7	3.238	98.15	100-110	113.3	3523	94,94
120	133.8	76.85	4.696	83.18	140.4	83.29	4.340	72.76	110-120	84.28	3607	96.2,96.2
130	104.2	54.03	5.838	65.82	108.4	65.77	5.461	50.95	120-130	59.18	3666	97.8,97.8
140	78.95	39.56	6.862	52.08	81.40	51.97	6.485	37.13	130-140	39.41	3706	98.8,98.8
150	57.08	28.45	7.827	38.97	58.92	38.97	7.429	26.83	140-150	24.37	3730	99.5,99.5
160	38.74	20.62	8.549	25.74	37.74	25.60	8.210	20.17	150-160	13.09	3743	99.8,99.8
170	20.26	13.84	8.920	14.32	18.12	14.23	8.716	13.91	160-170	5.380	3749	100,100
180	8.898	9.060	9.033	9.140	8.886	9.039	9.042	9.170	170-180	1.114	3750	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1538.3 lm

%lum = 41.0%

%lamp = 41.0%

Conical surface Flux(120deg): 2310.8 lm

%lum = 61.6%


%lamp = 61.6%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.27V I:0.1363A P:29.149W PF:0.8903 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3749.82x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

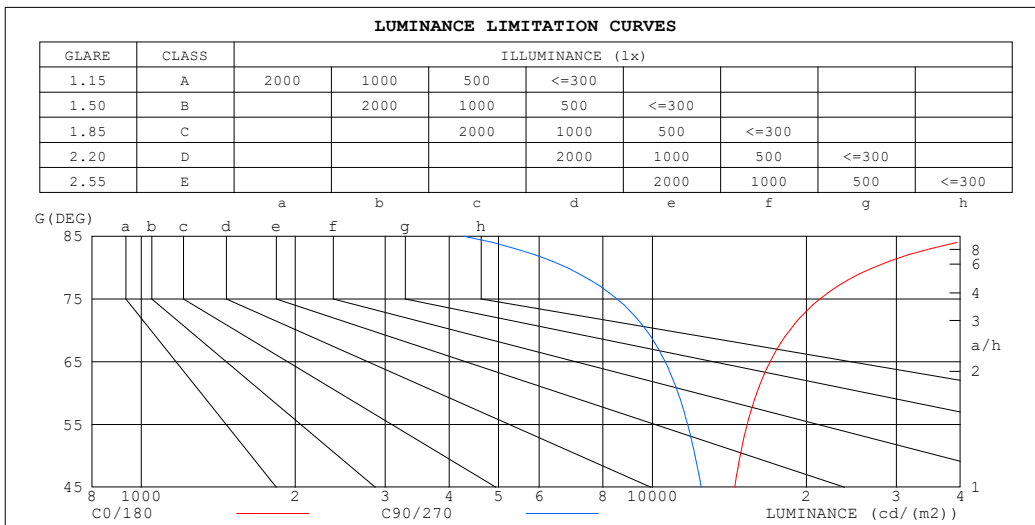

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	45904	4278
80	27040	6808
75	21263	8518
70	18556	9728
65	17001	10585
60	16003	11222
55	15319	11714
50	14838	12115
45	14494	12457


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.27V I:0.1363A P:29.149W PF:0.8903 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3749.82x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.97	.97	.97	.90	.90	.90	.87
1.0	.98	.93	.89	.95	.90	.86	.88	.84	.81	.82	.79	.76	.76	.74	.72	.69
2.0	.85	.77	.71	.82	.75	.69	.76	.70	.65	.71	.66	.62	.66	.62	.59	.56
3.0	.74	.65	.58	.71	.63	.57	.66	.60	.54	.62	.56	.52	.58	.53	.49	.46
4.0	.65	.56	.49	.63	.54	.48	.59	.51	.46	.55	.49	.44	.51	.46	.42	.39
5.0	.58	.49	.42	.56	.47	.41	.52	.45	.39	.49	.43	.38	.46	.40	.36	.33
6.0	.52	.43	.36	.50	.42	.35	.47	.40	.34	.44	.38	.33	.41	.36	.31	.29
7.0	.47	.38	.32	.45	.37	.31	.43	.35	.30	.40	.34	.29	.38	.32	.28	.26
8.0	.43	.34	.28	.41	.33	.28	.39	.32	.27	.37	.30	.26	.35	.29	.25	.23
9.0	.39	.31	.25	.38	.30	.25	.36	.29	.24	.34	.28	.23	.32	.26	.22	.20
10.0	.36	.28	.23	.35	.27	.22	.33	.26	.22	.31	.25	.21	.30	.24	.20	.18

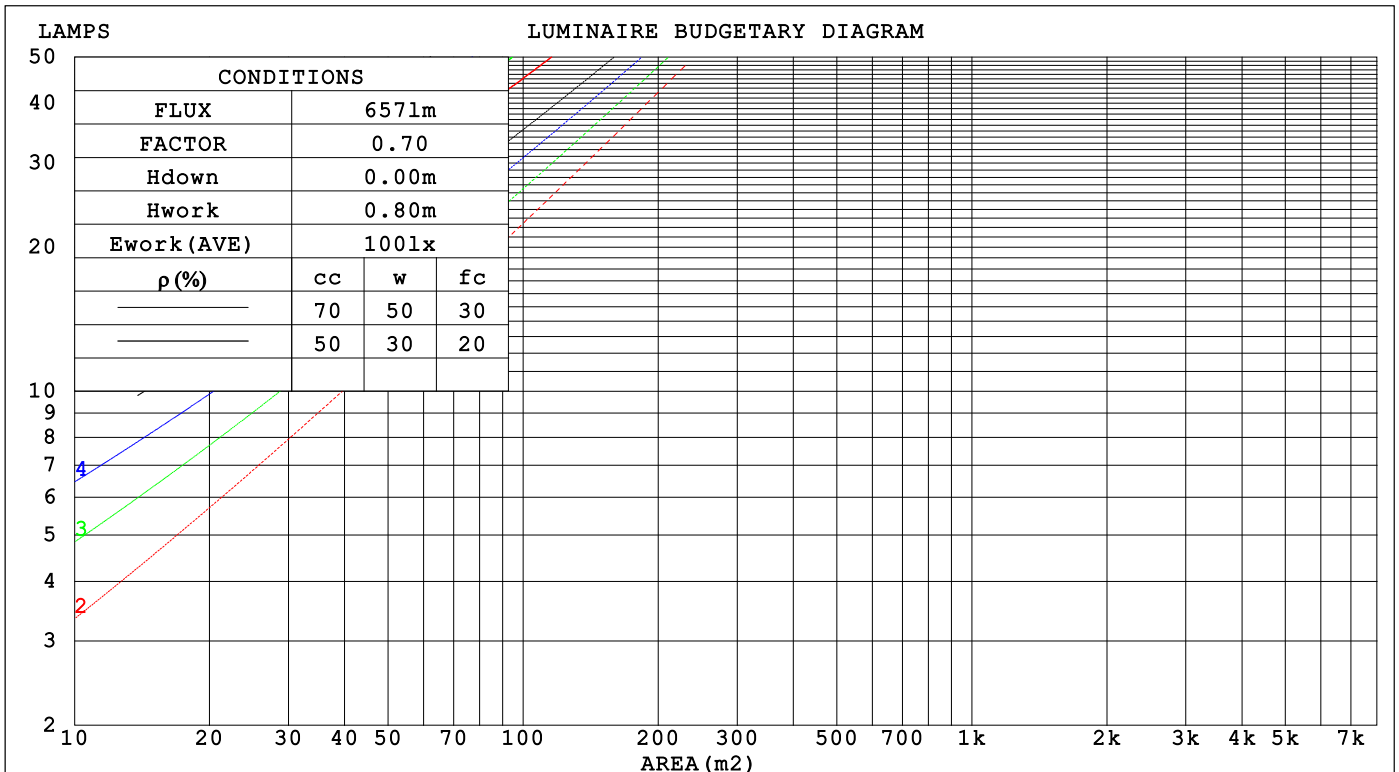

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.27V I:0.1363A P:29.149W PF:0.8903 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3749.82x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.357	.203	.064	.346	.197	.063	.325	.186	.060	.306	.176	.057	.288	.167	.054	
2.0	.317	.174	.053	.307	.169	.052	.288	.160	.050	.271	.152	.048	.255	.144	.046	
3.0	.286	.152	.046	.277	.148	.045	.260	.141	.043	.244	.134	.041	.230	.127	.039	
4.0	.259	.135	.040	.251	.131	.039	.236	.125	.037	.222	.119	.036	.209	.113	.035	
5.0	.237	.121	.035	.230	.118	.034	.216	.112	.033	.203	.107	.032	.191	.102	.031	
6.0	.218	.109	.031	.212	.107	.031	.199	.102	.030	.187	.097	.029	.176	.093	.028	
7.0	.202	.100	.028	.196	.098	.028	.184	.093	.027	.174	.089	.026	.164	.085	.025	
8.0	.188	.092	.026	.182	.090	.025	.172	.086	.025	.162	.082	.024	.153	.078	.023	
9.0	.175	.085	.024	.170	.083	.023	.161	.079	.023	.152	.076	.022	.143	.073	.021	
10.0	.164	.079	.022	.160	.077	.022	.151	.074	.021	.143	.071	.020	.135	.068	.019	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.289	.289	.289	.247	.247	.247	.169	.169	.169	.097	.097	.097	.031	.031	.031	
2.0	.276	.232	.195	.236	.200	.169	.162	.138	.118	.093	.080	.069	.030	.026	.022	
3.0	.268	.215	.173	.230	.186	.150	.158	.129	.105	.091	.075	.062	.029	.024	.020	
4.0	.261	.203	.158	.224	.175	.137	.154	.122	.097	.089	.071	.057	.029	.023	.019	
5.0	.253	.193	.148	.217	.167	.129	.150	.116	.091	.087	.068	.054	.028	.022	.018	
6.0	.246	.184	.140	.211	.160	.122	.146	.112	.087	.085	.066	.051	.027	.022	.017	
7.0	.239	.178	.135	.205	.154	.118	.142	.108	.083	.082	.064	.050	.027	.021	.016	
8.0	.232	.172	.131	.200	.149	.114	.138	.105	.081	.080	.062	.048	.026	.020	.016	
9.0	.226	.167	.128	.195	.145	.111	.135	.102	.079	.079	.060	.047	.025	.020	.016	
10.0	.220	.163	.125	.190	.142	.109	.132	.100	.078	.077	.059	.046	.025	.019	.015	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.27V I:0.1363A P:29.149W PF:0.8903 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3749.82x1 lm										
NAME: E-B40W-E				TYPE: 25W				WEIGHT:		
SPEC.: 3000K				DIM.:				SERIAL No.:		
MFR.: EVERFINE				SUR.: 1.161*0.061				Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.6	23.0	22.1	23.5	23.9	20.4	21.8	20.9	22.3	22.7
3H	23.9	25.2	24.4	25.6	26.1	21.9	23.2	22.3	23.6	24.1
4H	25.1	26.3	25.6	26.8	27.3	22.4	23.6	22.9	24.1	24.6
6H	26.3	27.5	26.8	28.0	28.5	22.7	23.9	23.3	24.4	24.9
8H	27.0	28.1	27.5	28.6	29.2	22.8	23.9	23.3	24.4	25.0
12H	27.8	28.9	28.3	29.4	30.0	22.8	23.9	23.4	24.4	25.0
4H 2H	22.2	23.4	22.7	23.9	24.4	21.3	22.5	21.8	23.0	23.5
3H	24.6	25.7	25.2	26.2	26.8	23.0	24.1	23.5	24.6	25.2
4H	26.0	27.0	26.5	27.5	28.1	23.7	24.7	24.3	25.2	25.8
6H	27.4	28.3	28.0	28.9	29.5	24.2	25.1	24.8	25.7	26.3
8H	28.2	29.1	28.8	29.6	30.3	24.4	25.2	25.0	25.8	26.4
12H	29.2	29.9	29.8	30.5	31.2	24.4	25.2	25.1	25.8	26.5
8H 4H	26.3	27.1	26.9	27.7	28.3	24.4	25.2	25.0	25.8	26.4
6H	28.0	28.7	28.6	29.3	30.0	25.2	25.9	25.8	26.5	27.2
8H	29.0	29.6	29.6	30.2	30.9	25.5	26.1	26.2	26.8	27.5
12H	30.1	30.7	30.8	31.3	32.1	25.8	26.3	26.4	27.0	27.7
12H 4H	26.3	27.0	26.9	27.6	28.3	24.5	25.3	25.2	25.9	26.6
6H	28.1	28.7	28.7	29.3	30.0	25.5	26.2	26.2	26.8	27.5
8H	29.1	29.7	29.8	30.3	31.1	26.0	26.5	26.7	27.2	28.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 3750 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.6)
 Area: 0.070821 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.27V I:0.1363A P:29.149W PF:0.8903 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3749.82x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	51	39	32	50	38	32	48	38	31	24
0.80	60	48	40	59	47	40	56	46	39	31
1.00	68	56	48	67	55	48	63	56	47	38
1.25	75	63	55	73	62	55	69	60	53	44
1.50	80	69	61	78	68	60	74	65	58	49
2.00	87	77	70	85	75	68	80	72	66	55
2.50	92	82	75	89	80	74	83	76	71	59
3.00	95	87	80	92	85	78	86	80	75	63
4.00	100	93	87	96	90	85	90	85	80	68
5.00	103	96	91	99	93	89	92	88	84	71
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.27V I:0.1363A P:29.149W PF:0.8903 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3749.82x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

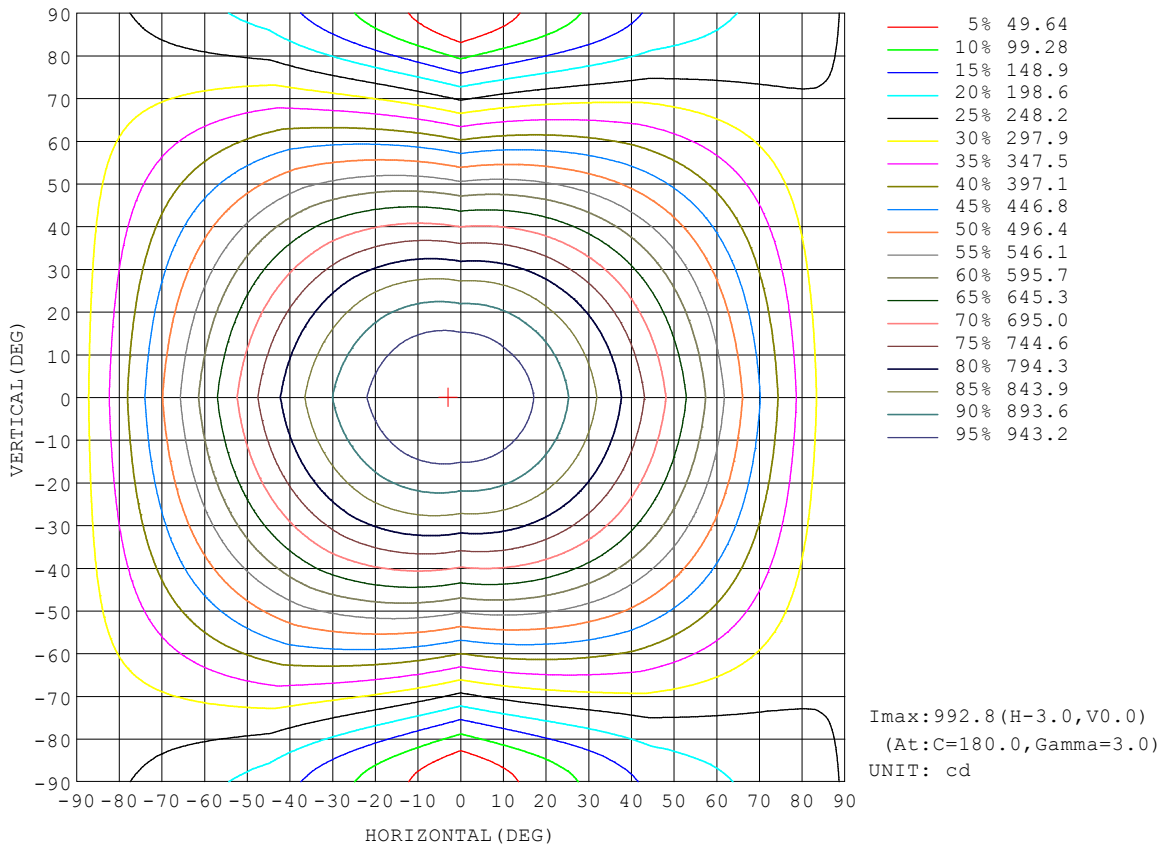


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.27V I:0.1363A P:29.149W PF:0.8903 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3749.82x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

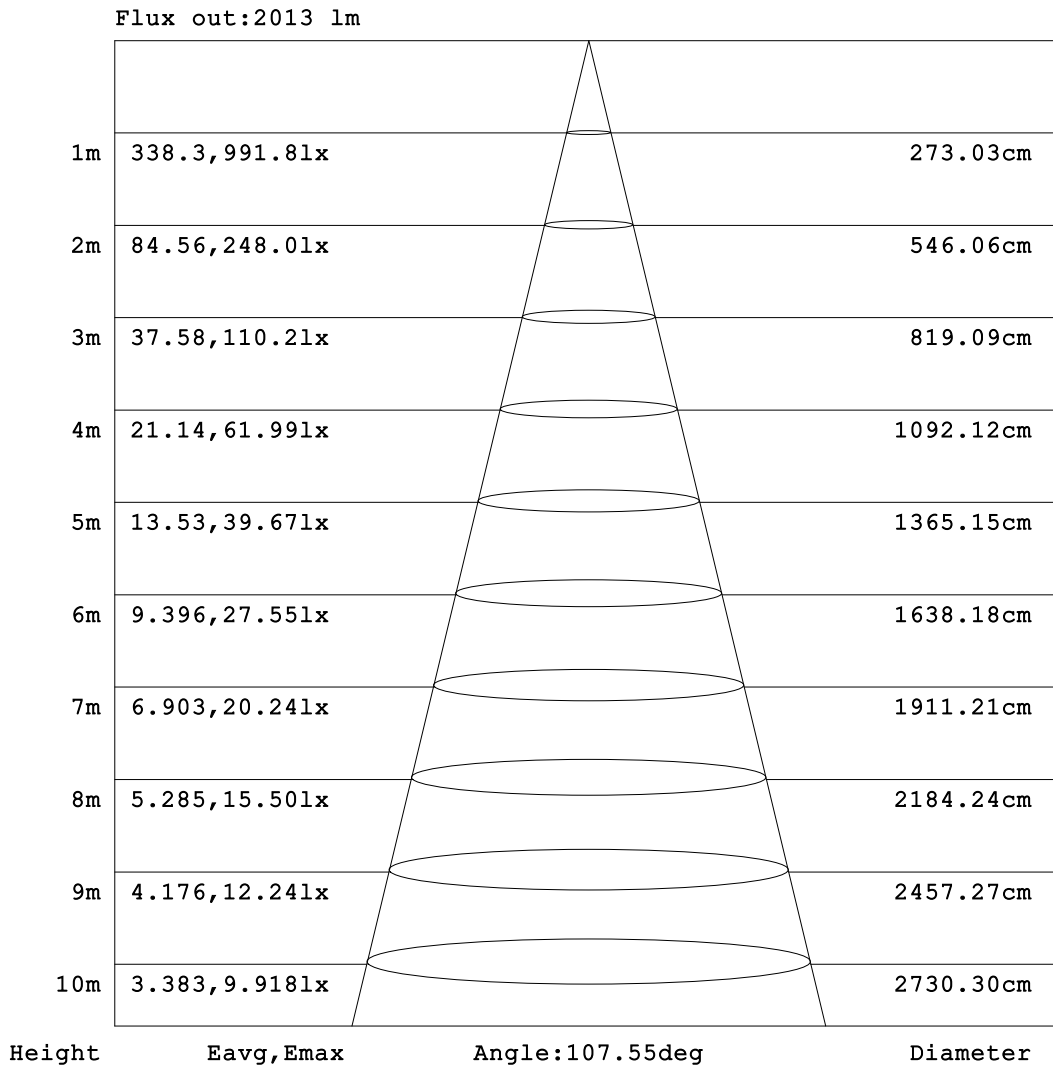


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.27V I:0.1363A P:29.149W PF:0.8903 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3749.82x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

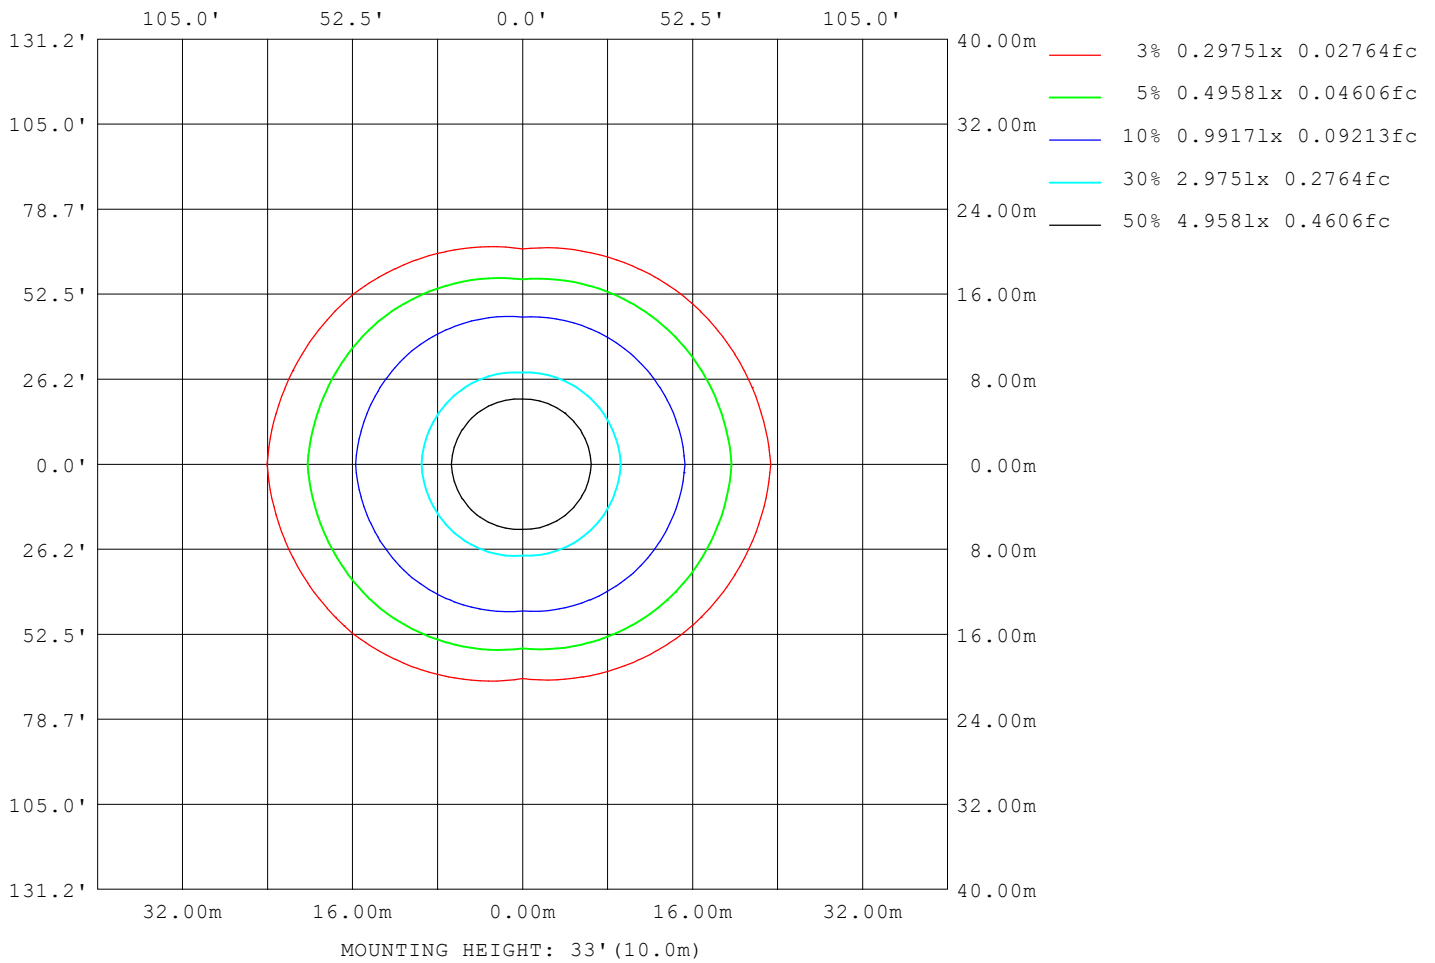

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.27V I:0.1363A P:29.149W PF:0.8903 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3749.82x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	17746
L_0~180 (75) av	22477
L_0~180 (85) av	48763
L_90~270 (65) av	10659
L_90~270 (75) av	8693
L_90~270 (85) av	4531
L_45 (65) av	14816
L_45 (75) av	17192
L_45 (85) av	32980

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

Planar Illuminance Curve

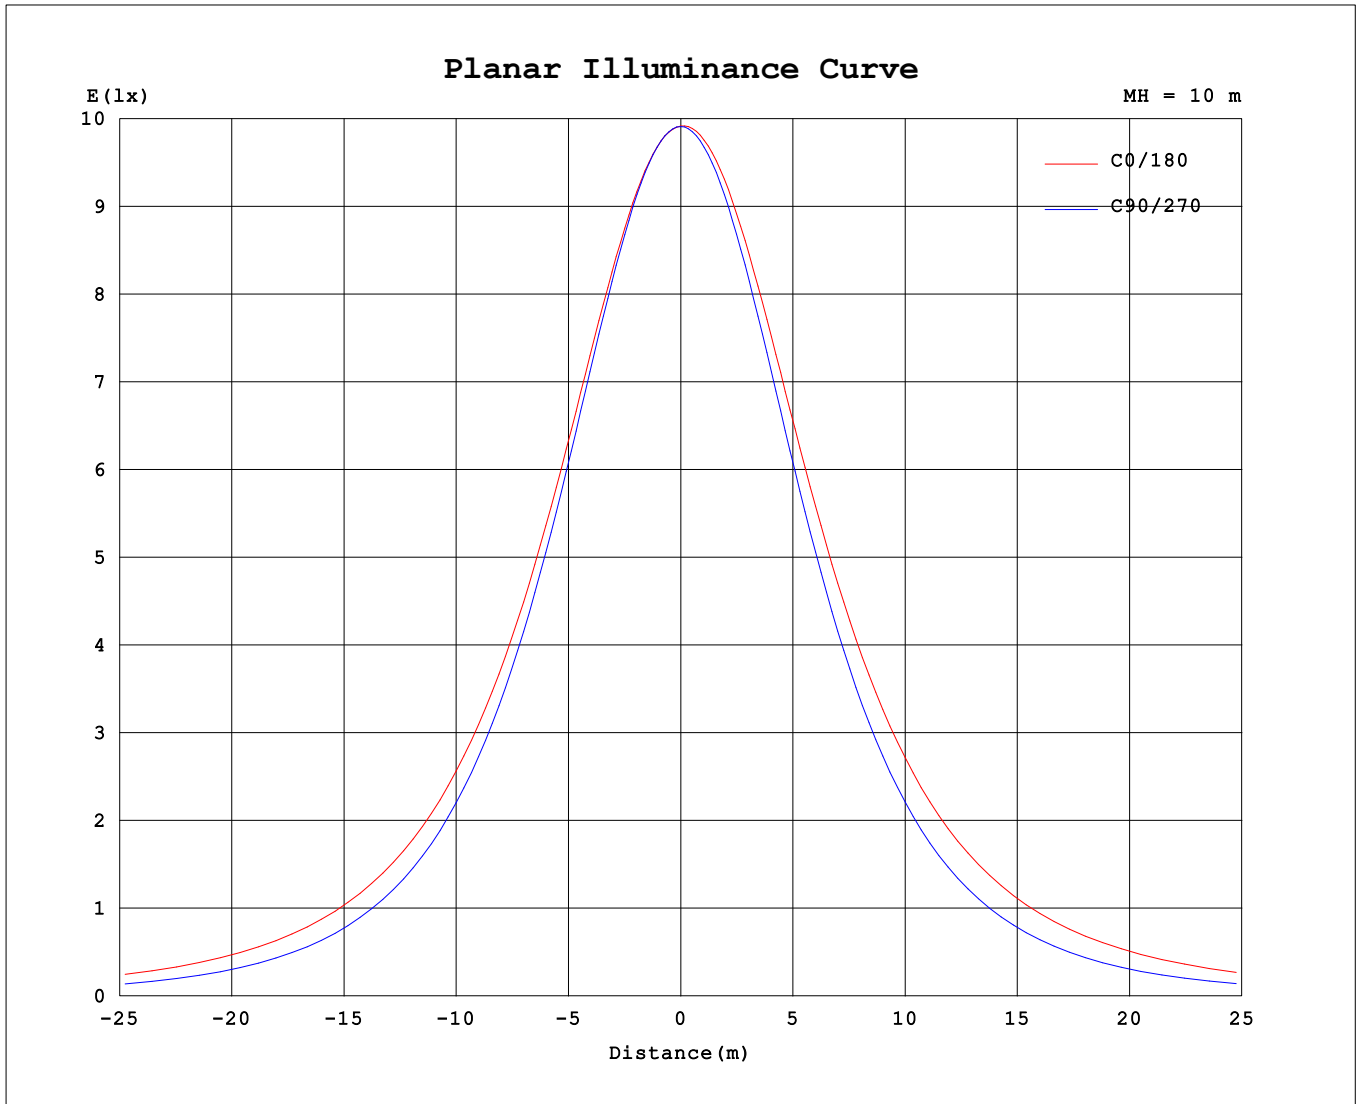

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.27V I:0.1363A P:29.149W PF:0.8903 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3749.82x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315											
0	991	991	991	991	991	991	991	991											
5	985	985	986	989	992	989	986	985											
10	973	971	970	980	986	979	970	970											
15	953	948	944	961	973	961	944	947											
20	927	918	909	935	953	934	909	916											
25	895	881	865	902	926	900	866	879											
30	858	837	814	861	893	860	815	834											
35	817	788	756	815	856	813	757	785											
40	773	735	692	764	814	763	693	732											
45	725	678	624	709	768	708	625	674											
50	675	618	551	650	719	649	554	614											
55	622	556	476	589	667	588	479	552											
60	566	492	397	526	612	526	401	488											
65	508	427	317	461	554	462	321	424											
70	449	362	236	396	494	397	241	359											
75	389	299	156	332	435	334	163	296											
80	332	240	83.7	271	374	272	89.0	237											
85	283	191	26.4	217	319	218	29.5	188											
90	251	161	1.67	179	275	178	1.51	157											
95	228	143	2.07	155	247	155	1.78	140											
100	207	127	2.57	136	222	136	2.28	124											
105	187	113	3.01	120	198	120	2.70	110											
110	168	101	3.56	106	178	106	3.24	98.2											
115	150	86.3	4.12	93.7	158	93.8	3.79	85.7											
120	134	76.9	4.70	83.2	140	83.3	4.34	72.8											
125	119	63.5	5.28	73.9	124	73.9	4.91	60.1											
130	104	54.0	5.84	65.8	108	65.8	5.46	50.9											
135	91.2	46.3	6.37	58.7	94.2	58.6	6.00	43.3											
140	78.9	39.6	6.86	52.1	81.4	52.0	6.48	37.1											
145	67.6	33.6	7.32	45.6	69.7	45.6	6.97	31.5											
150	57.1	28.5	7.83	39.0	58.9	39.0	7.43	26.8											
155	47.5	23.8	8.23	32.2	48.4	32.1	7.81	22.8											
160	38.7	20.6	8.55	25.7	37.7	25.6	8.21	20.2											
165	29.7	17.3	8.76	19.5	27.1	19.5	8.52	17.2											
170	20.3	13.8	8.92	14.3	18.1	14.2	8.72	13.9											
175	11.0	11.1	9.03	10.8	10.5	10.6	8.91	11.2											
180	8.90	9.06	9.03	9.14	8.89	9.04	9.04	9.17											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks: