
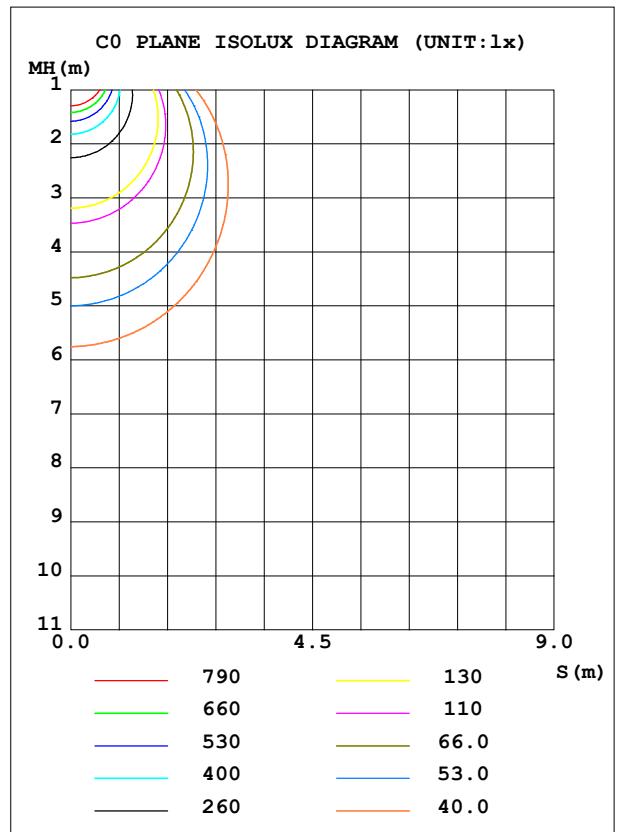


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.29V I:0.1736A P:38.449W PF:0.9216 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5006.3x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	E-B40W-E	Imax (cd)	1325	S/MH (C0/180)	1.29
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	5006.3	η UP, DN (C0-180)	6.4,43.1
NOMINAL FLUX (lm)	5006.3	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	6.5,43.9
LAMPS INSIDE	1	η up (%)	13.0	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	240	η down (%)	87.0	CIBSE SHR MAX	1.50

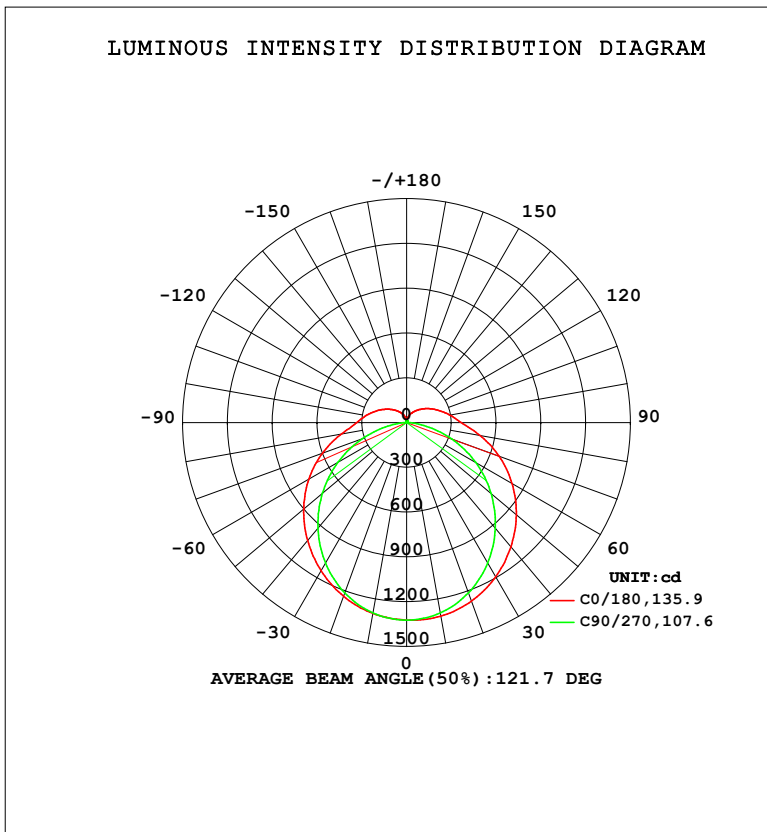

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1298	1296	1295	1308	1317	1307	1295	1295	0- 10	125.3	125.3	2.5,2.5
20	1238	1226	1214	1249	1272	1247	1214	1223	10- 20	359.5	484.8	9.68,9.68
30	1146	1117	1086	1150	1194	1148	1087	1114	20- 30	547.3	1032	20.6,20.6
40	1032	980.8	924.0	1020	1087	1019	925.6	976.3	30- 40	667.2	1699	33.9,33.9
50	900.7	824.6	736.3	868.1	960.3	867.0	739.0	820.0	40- 50	709.9	2409	48.1,48.1
60	755.8	656.3	530.2	702.6	816.4	702.5	535.2	652.1	50- 60	676.0	3085	61.6,61.6
70	599.6	483.3	314.7	529.7	659.7	531.0	321.8	479.1	60- 70	574.3	3659	73.1,73.1
80	443.6	320.5	111.4	362.1	499.1	364.3	119.0	317.1	70- 80	424.4	4084	81.6,81.6
90	334.7	214.3	2.293	237.0	366.8	238.2	2.038	210.1	80- 90	272.9	4357	87,87
100	276.4	169.6	3.472	181.5	295.9	181.7	3.092	165.3	90-100	195.5	4552	90.9,90.9
110	224.5	134.6	4.796	141.4	236.7	141.2	4.350	131.0	100-110	151.3	4704	94,94
120	178.8	102.6	6.328	111.1	186.9	110.8	5.849	96.52	110-120	112.4	4816	96.2,96.2
130	139.1	72.14	7.851	87.94	144.7	87.77	7.339	67.91	120-130	78.98	4895	97.8,97.8
140	105.0	52.85	9.221	69.58	108.7	69.35	8.709	49.50	130-140	52.60	4948	98.8,98.8
150	76.19	37.99	10.51	52.03	78.67	52.07	9.985	35.78	140-150	32.53	4980	99.5,99.5
160	51.75	27.64	11.48	34.41	50.41	34.27	11.02	26.93	150-160	17.49	4998	99.8,99.8
170	27.11	18.57	11.97	19.20	24.26	19.09	11.68	18.61	160-170	7.202	5005	100,100
180	11.95	12.17	12.12	12.27	11.95	12.14	12.13	12.28	170-180	1.493	5006	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2053.9 lm

%lum = 41.0%

%lamp = 41.0%

Conical surface Flux(120deg): 3085.2 lm

%lum = 61.6%


%lamp = 61.6%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.29V I:0.1736A P:38.449W PF:0.9216 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5006.3x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

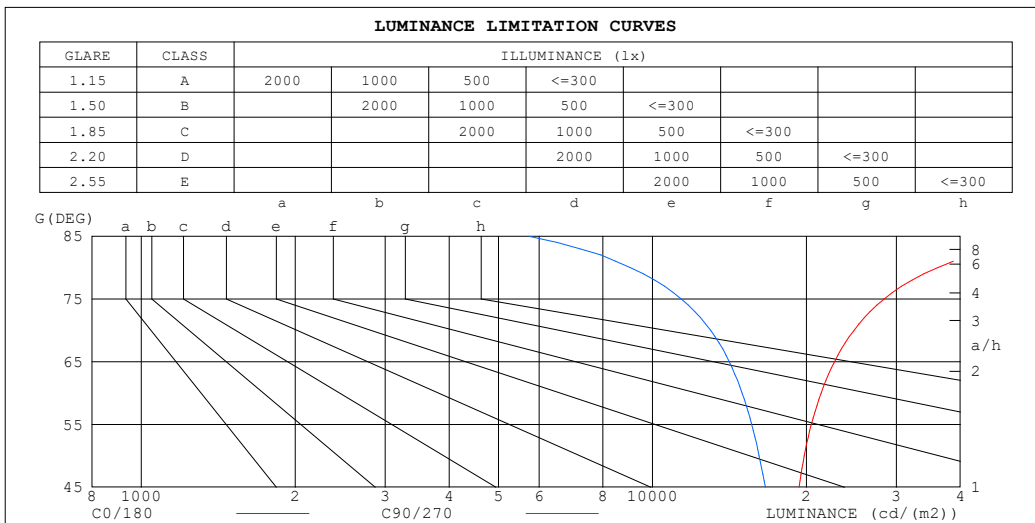

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	61323	5731
80	36115	9055
75	28400	11382
70	24788	12992
65	22712	14133
60	21372	14972
55	20458	15632
50	19810	16172
45	19365	16629


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.29V I:0.1736A P:38.449W PF:0.9216 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5006.3x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.97	.97	.97	.90	.90	.90	.87
1.0	.98	.93	.89	.95	.90	.86	.88	.84	.81	.82	.79	.76	.76	.74	.72	.69
2.0	.85	.77	.71	.82	.75	.69	.76	.70	.65	.71	.66	.62	.66	.62	.59	.56
3.0	.74	.65	.58	.71	.63	.57	.66	.60	.54	.62	.56	.52	.58	.53	.49	.46
4.0	.65	.56	.49	.63	.54	.48	.59	.51	.46	.55	.49	.44	.51	.46	.42	.39
5.0	.58	.49	.42	.56	.47	.41	.52	.45	.39	.49	.43	.38	.46	.40	.36	.33
6.0	.52	.43	.36	.50	.42	.35	.47	.40	.34	.44	.38	.33	.41	.36	.31	.29
7.0	.47	.38	.32	.45	.37	.31	.43	.35	.30	.40	.34	.29	.38	.32	.28	.26
8.0	.43	.34	.28	.41	.33	.28	.39	.32	.27	.37	.30	.26	.35	.29	.25	.23
9.0	.39	.31	.25	.38	.30	.25	.36	.29	.24	.34	.28	.23	.32	.26	.22	.20
10.0	.36	.28	.23	.35	.27	.22	.33	.26	.22	.31	.25	.21	.30	.24	.20	.18

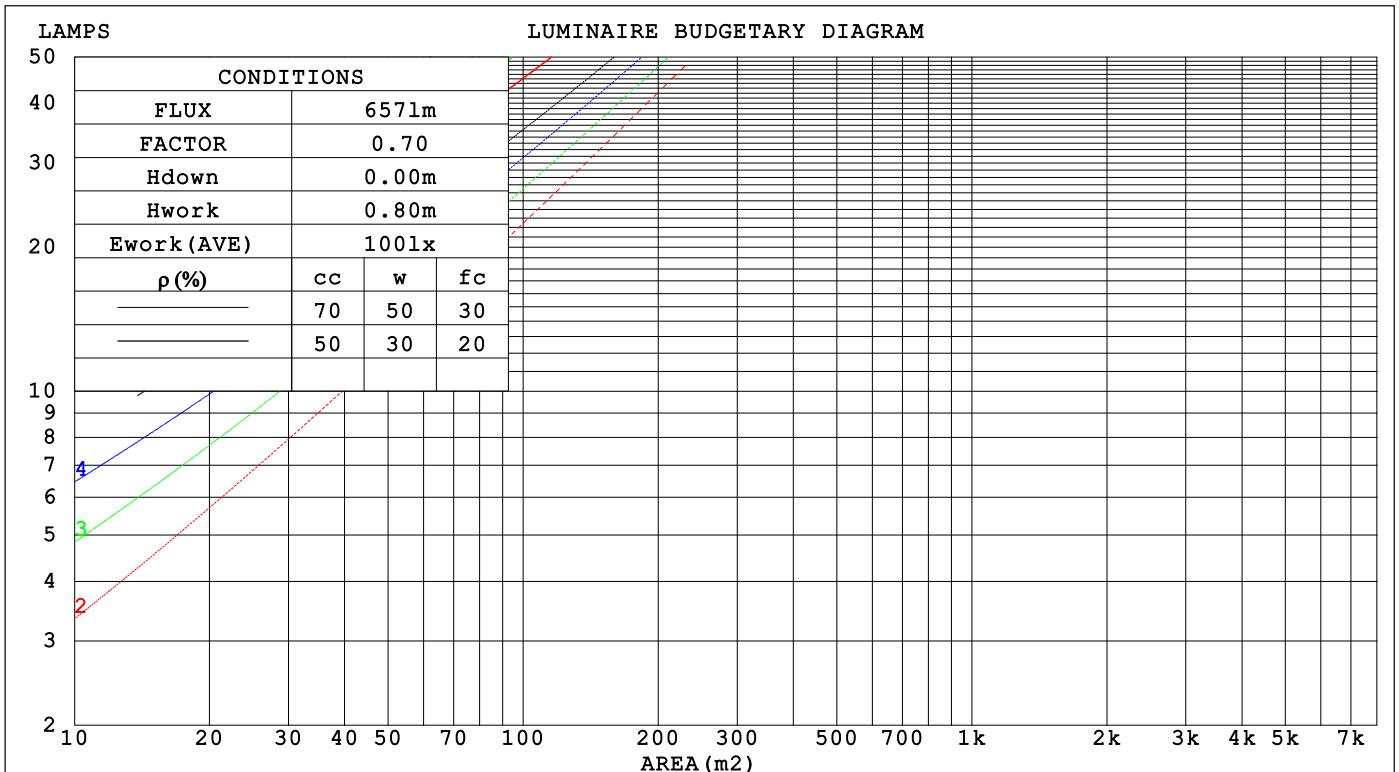

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.29V I:0.1736A P:38.449W PF:0.9216 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5006.3x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.357	.203	.064	.346	.197	.063	.325	.186	.060	.306	.176	.057	.288	.167	.054	
2.0	.317	.174	.053	.307	.169	.052	.288	.160	.050	.271	.152	.048	.255	.144	.046	
3.0	.286	.152	.046	.277	.148	.045	.260	.141	.043	.244	.134	.041	.230	.127	.039	
4.0	.259	.135	.040	.251	.131	.039	.236	.125	.037	.222	.119	.036	.209	.113	.035	
5.0	.237	.121	.035	.230	.118	.034	.216	.112	.033	.203	.107	.032	.191	.102	.031	
6.0	.218	.109	.031	.212	.107	.031	.199	.102	.030	.187	.097	.029	.176	.093	.028	
7.0	.202	.100	.028	.196	.098	.028	.184	.093	.027	.174	.089	.026	.164	.085	.025	
8.0	.188	.092	.026	.182	.090	.025	.172	.086	.025	.162	.082	.024	.153	.078	.023	
9.0	.175	.085	.024	.170	.083	.023	.161	.079	.023	.152	.076	.022	.143	.073	.021	
10.0	.164	.079	.022	.160	.077	.022	.151	.074	.021	.143	.071	.020	.135	.068	.019	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.289	.289	.289	.247	.247	.247	.169	.169	.169	.097	.097	.097	.031	.031	.031	
2.0	.276	.232	.195	.236	.200	.169	.162	.138	.118	.093	.080	.069	.030	.026	.022	
3.0	.268	.215	.173	.230	.186	.150	.158	.129	.105	.091	.075	.062	.029	.024	.020	
4.0	.261	.203	.158	.224	.175	.137	.154	.122	.097	.089	.071	.057	.029	.023	.019	
5.0	.253	.193	.148	.217	.167	.129	.150	.116	.091	.087	.068	.054	.028	.022	.018	
6.0	.246	.184	.140	.211	.160	.122	.146	.112	.087	.085	.066	.051	.027	.022	.017	
7.0	.239	.178	.135	.205	.154	.118	.142	.108	.083	.082	.064	.050	.027	.021	.016	
8.0	.232	.172	.131	.200	.149	.114	.138	.105	.081	.080	.062	.048	.026	.020	.016	
9.0	.226	.167	.128	.195	.145	.111	.135	.102	.079	.079	.060	.047	.025	.020	.016	
10.0	.220	.163	.125	.190	.142	.109	.132	.100	.078	.077	.059	.046	.025	.019	.015	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.29V I:0.1736A P:38.449W PF:0.9216 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5006.3x1 lm										
NAME: E-B40W-E				TYPE: 35W				WEIGHT:		
SPEC.: 3000K				DIM.:				SERIAL No.:		
MFR.: EVERFINE				SUR.: 1.161*0.061				Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.6	24.0	23.1	24.5	24.9	21.4	22.8	21.9	23.3	23.7
3H	24.9	26.2	25.4	26.6	27.1	22.9	24.2	23.3	24.6	25.1
4H	26.1	27.3	26.6	27.8	28.3	23.4	24.6	23.9	25.1	25.6
6H	27.3	28.5	27.8	29.0	29.5	23.7	24.9	24.3	25.4	25.9
8H	28.0	29.1	28.5	29.6	30.2	23.8	24.9	24.3	25.4	26.0
12H	28.8	29.9	29.4	30.4	31.0	23.8	24.9	24.4	25.4	26.0
4H 2H	23.2	24.4	23.7	24.9	25.4	22.3	23.5	22.8	24.0	24.5
3H	25.6	26.7	26.2	27.2	27.8	24.0	25.1	24.5	25.6	26.2
4H	27.0	28.0	27.5	28.5	29.1	24.7	25.7	25.3	26.2	26.8
6H	28.4	29.3	29.0	29.9	30.5	25.2	26.1	25.8	26.7	27.3
8H	29.2	30.1	29.8	30.6	31.3	25.4	26.2	26.0	26.8	27.4
12H	30.2	30.9	30.8	31.5	32.2	25.4	26.2	26.1	26.8	27.5
8H 4H	27.3	28.1	27.9	28.7	29.3	25.4	26.2	26.0	26.8	27.4
6H	29.0	29.7	29.6	30.3	31.0	26.2	26.9	26.8	27.5	28.2
8H	30.0	30.6	30.6	31.2	31.9	26.5	27.1	27.2	27.8	28.5
12H	31.1	31.7	31.8	32.3	33.1	26.8	27.3	27.4	28.0	28.7
12H 4H	27.3	28.0	27.9	28.6	29.3	25.6	26.3	26.2	26.9	27.6
6H	29.1	29.7	29.7	30.3	31.1	26.5	27.2	27.2	27.8	28.5
8H	30.2	30.7	30.8	31.3	32.1	27.0	27.6	27.7	28.2	29.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 5006 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.6)
 Area: 0.070821 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.29V I:0.1736A P:38.449W PF:0.9216 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5006.3x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	51	39	32	50	38	32	48	38	31	25
0.80	60	48	40	59	47	40	56	46	39	31
1.00	68	56	48	67	55	48	63	56	47	38
1.25	75	63	55	73	62	55	69	60	53	44
1.50	80	69	61	78	68	60	74	65	58	49
2.00	87	77	70	85	75	68	80	72	66	55
2.50	92	82	75	89	80	74	83	76	71	59
3.00	95	87	80	92	85	78	86	80	75	63
4.00	100	93	87	96	90	85	90	85	80	68
5.00	103	96	91	99	93	89	92	88	84	71
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.29V I:0.1736A P:38.449W PF:0.9216 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5006.3x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

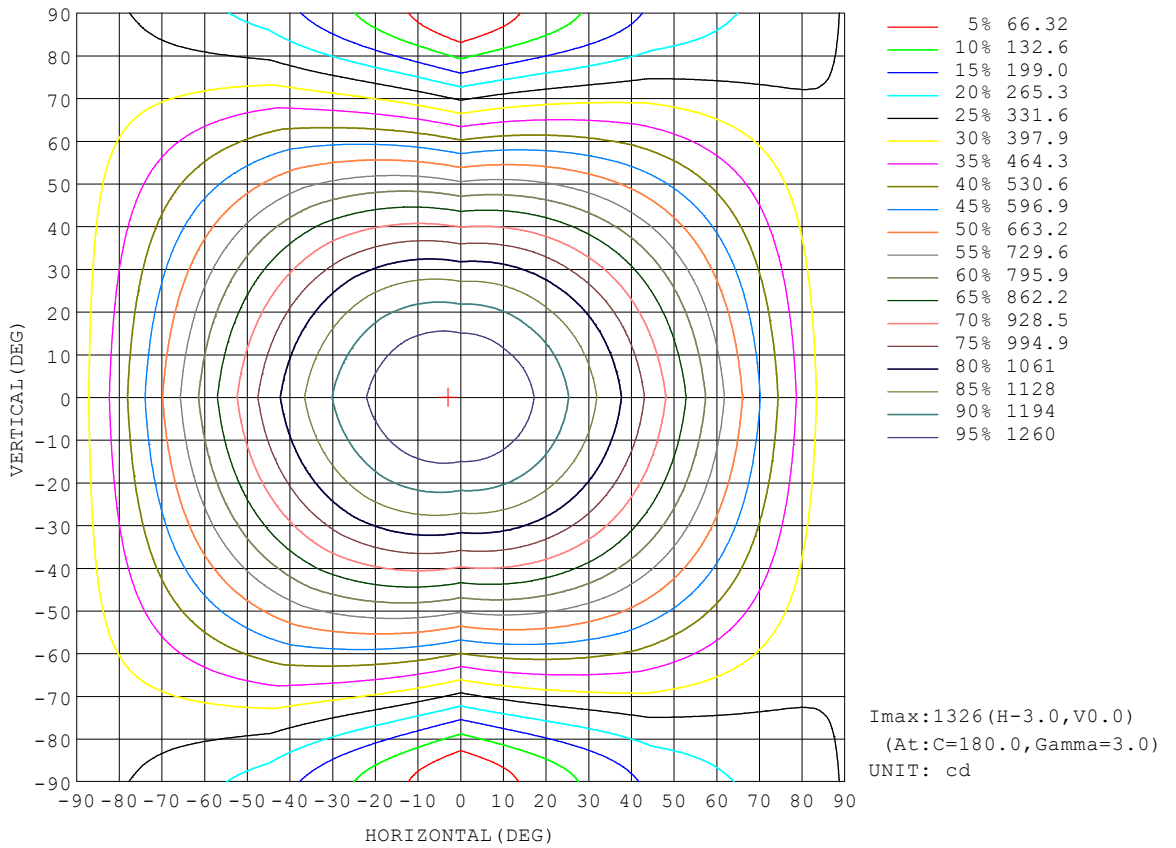


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.29V I:0.1736A P:38.449W PF:0.9216 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5006.3x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

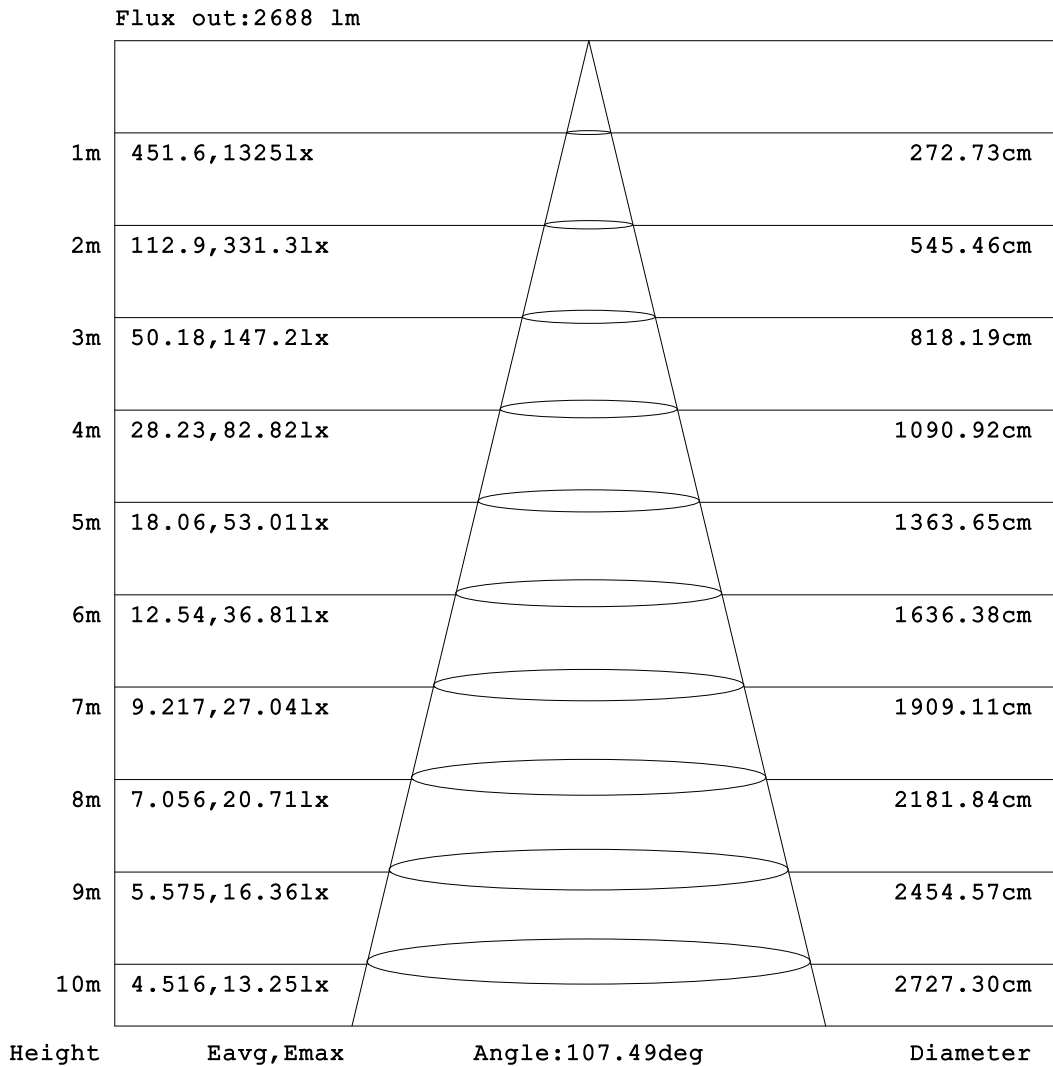


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.29V I:0.1736A P:38.449W PF:0.9216 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5006.3x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

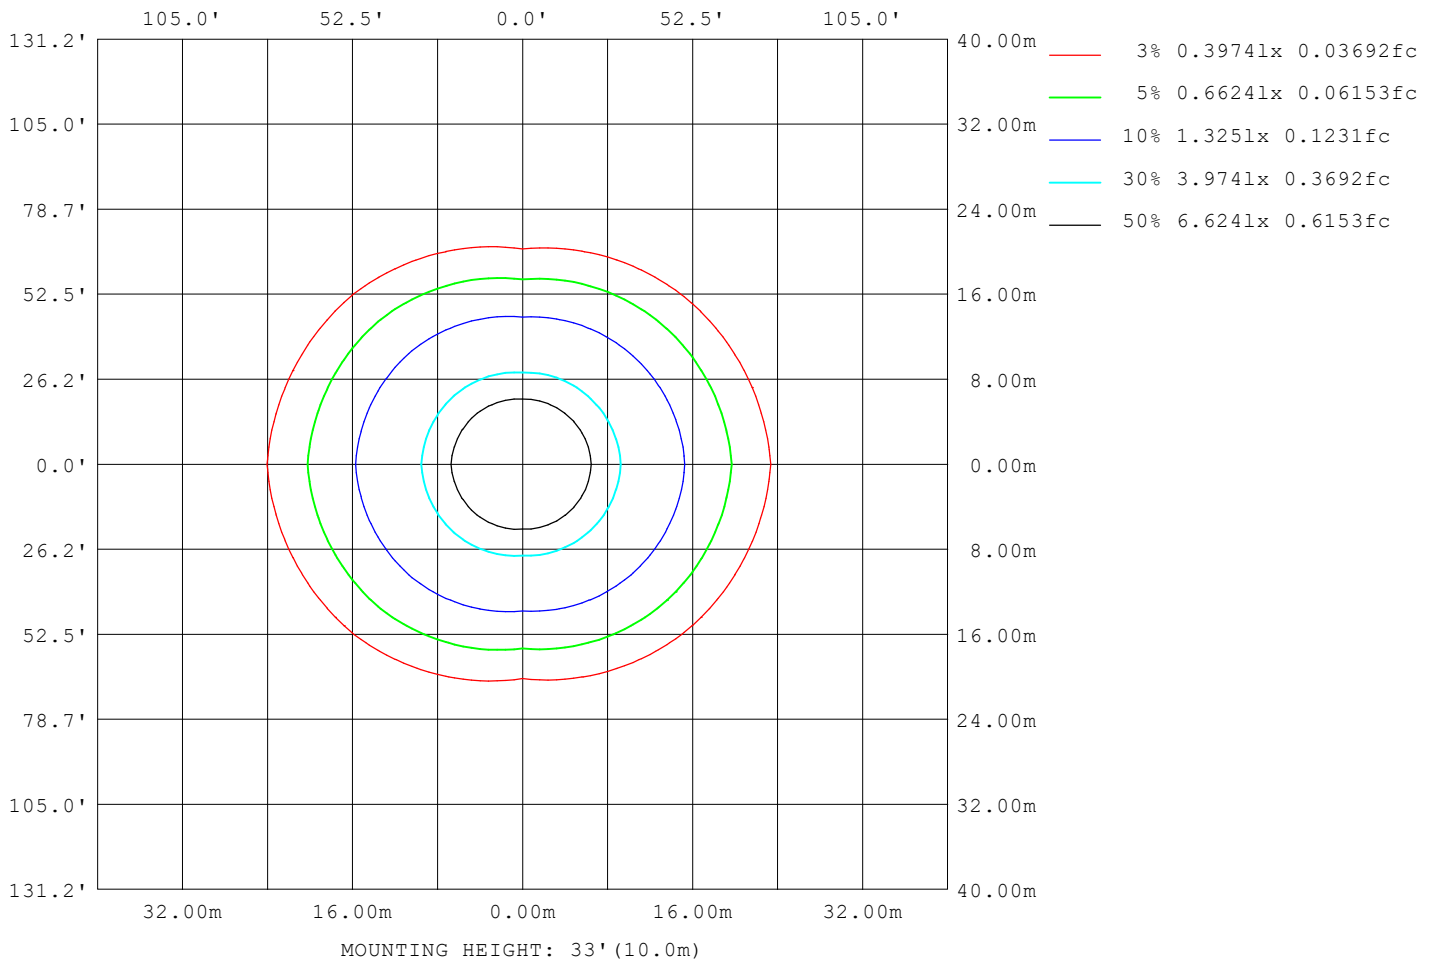

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.29V I:0.1736A P:38.449W PF:0.9216 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5006.3x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	23693
L_0~180 (75) av	29990
L_0~180 (85) av	65063
L_90~270 (65) av	14235
L_90~270 (75) av	11599
L_90~270 (85) av	6065
L_45 (65) av	19785
L_45 (75) av	22963
L_45 (85) av	44038

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

Planar Illuminance Curve

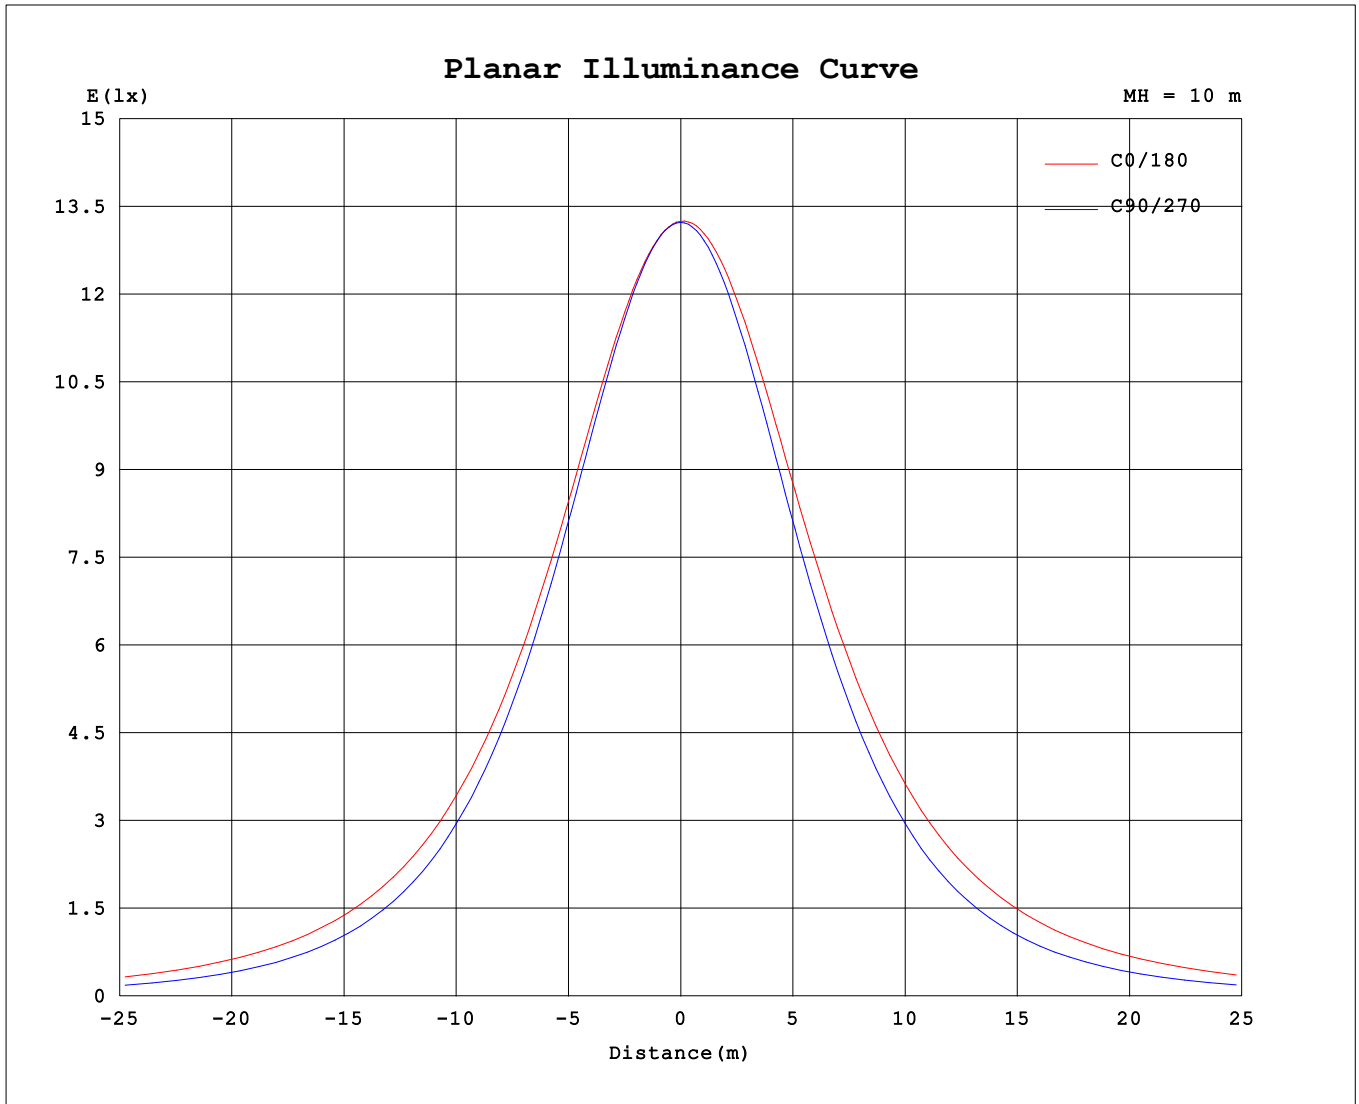

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.29V I:0.1736A P:38.449W PF:0.9216 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5006.3x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315											
0	1323	1323	1323	1323	1323	1323	1323	1323											
5	1315	1315	1316	1321	1324	1321	1316	1314											
10	1298	1296	1295	1308	1317	1307	1295	1295											
15	1273	1266	1261	1284	1299	1283	1260	1264											
20	1238	1226	1214	1249	1272	1247	1214	1223											
25	1195	1176	1155	1204	1237	1202	1155	1172											
30	1146	1117	1086	1150	1194	1148	1087	1114											
35	1091	1052	1009	1088	1143	1086	1010	1048											
40	1032	981	924	1020	1087	1019	926	976											
45	969	905	833	946	1026	945	835	900											
50	901	825	736	868	960	867	739	820											
55	830	742	635	787	890	786	639	737											
60	756	656	530	703	816	703	535	652											
65	679	570	423	617	739	617	429	565											
70	600	483	315	530	660	531	322	479											
75	520	399	209	444	580	446	217	395											
80	444	320	111	362	499	364	119	317											
85	378	255	35.4	290	425	292	39.5	251											
90	335	214	2.29	237	367	238	2.04	210											
95	305	190	2.80	206	329	207	2.42	186											
100	276	170	3.47	182	296	182	3.09	165											
105	250	151	4.06	160	265	160	3.65	147											
110	225	135	4.80	141	237	141	4.35	131											
115	201	115	5.56	125	211	125	5.10	114											
120	179	103	6.33	111	187	111	5.85	96.5											
125	158	84.7	7.09	98.7	165	98.3	6.61	80.1											
130	139	72.1	7.85	87.9	145	87.8	7.34	67.9											
135	121	61.7	8.56	78.3	126	78.2	8.06	57.7											
140	105	52.9	9.22	69.6	109	69.3	8.71	49.5											
145	90.2	44.8	9.85	61.0	93.0	60.8	9.37	42.0											
150	76.2	38.0	10.5	52.0	78.7	52.1	9.98	35.8											
155	63.5	31.9	11.1	43.0	64.6	42.9	10.5	30.5											
160	51.8	27.6	11.5	34.4	50.4	34.3	11.0	26.9											
165	39.7	23.1	11.8	26.1	36.3	26.2	11.4	22.9											
170	27.1	18.6	12.0	19.2	24.3	19.1	11.7	18.6											
175	14.8	14.8	12.1	14.5	14.1	14.2	11.9	14.9											
180	11.9	12.2	12.1	12.3	12.0	12.1	12.1	12.3											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks: