
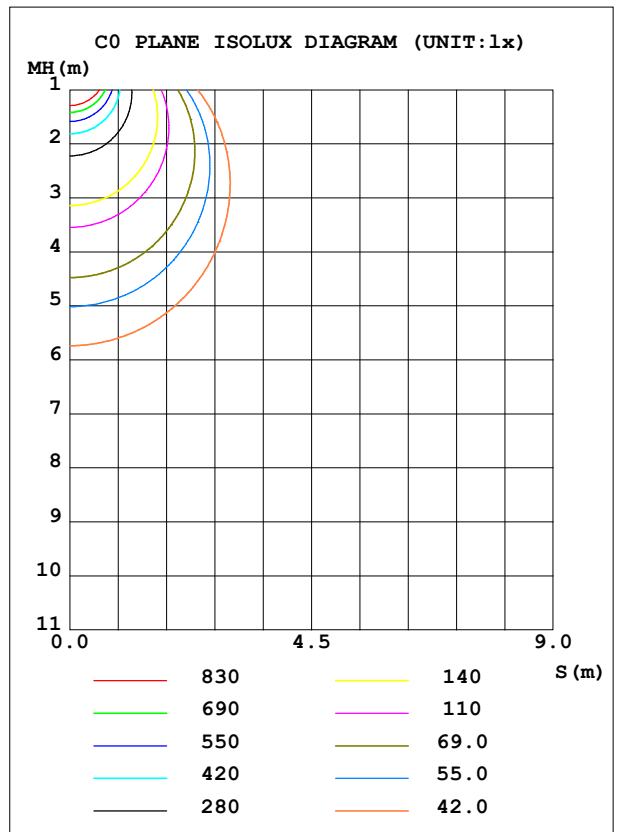


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.30V I:0.1706A P:37.727W PF:0.9202 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5306.02x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.06l	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	E-B40W-E	Imax (cd)	1387	S/MH (C0/180)	1.32
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	5306.0	η UP, DN (C0-180)	6.7,43.5
NOMINAL FLUX (lm)	5306.02	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	6.4,43.4
LAMPS INSIDE	1	η up (%)	13.2	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	240	η down (%)	86.8	CIBSE SHR MAX	1.50

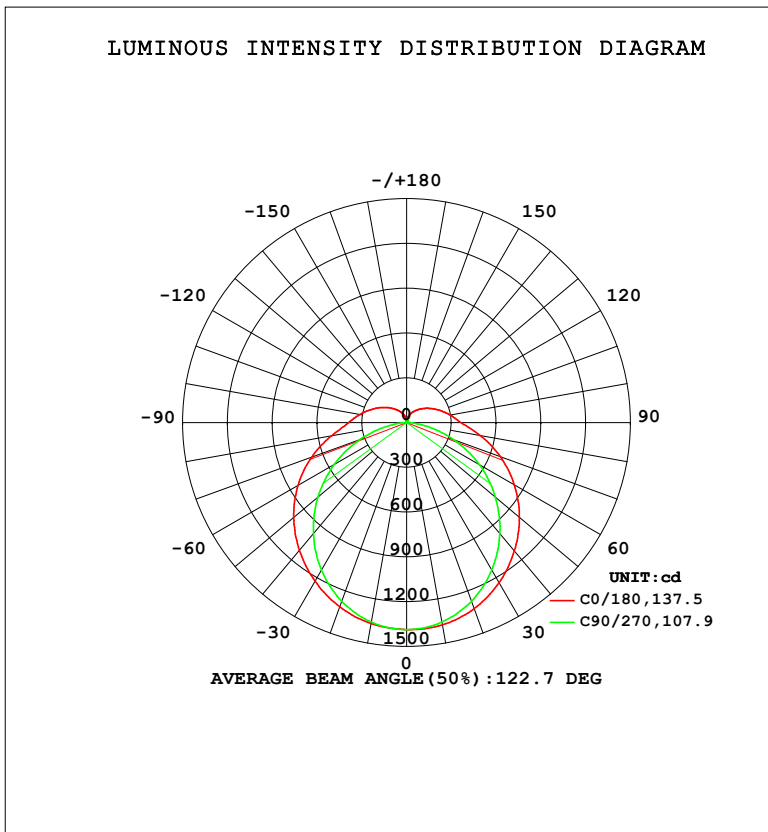

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1367	1362	1357	1368	1376	1367	1357	1361	0- 10	131.3	131.3	2.47,2.47
20	1313	1295	1273	1304	1326	1302	1273	1293	10- 20	377.3	508.6	9.59,9.59
30	1227	1190	1141	1198	1239	1195	1141	1186	20- 30	575.5	1084	20.4,20.4
40	1117	1054	971.8	1058	1123	1056	972.4	1050	30- 40	703.2	1787	33.7,33.7
50	988.1	896.3	775.3	895.2	987.0	894.1	777.0	891.5	40- 50	749.9	2537	47.8,47.8
60	840.1	723.4	559.2	718.8	833.7	718.7	562.9	719.4	50- 60	716.0	3253	61.3,61.3
70	676.9	543.1	332.1	536.0	668.3	537.0	338.5	539.0	60- 70	609.9	3863	72.8,72.8
80	510.9	370.4	117.5	360.9	500.1	362.8	125.0	366.7	70- 80	452.6	4316	81.3,81.3
90	389.1	252.0	2.440	233.6	365.3	234.6	2.160	248.1	80- 90	292.6	4608	86.8,86.8
100	318.8	196.9	3.665	181.0	297.2	181.2	3.271	193.2	90-100	210.3	4819	90.8,90.8
110	256.8	154.8	5.046	142.7	239.7	142.4	4.594	151.2	100-110	162.8	4981	93.9,93.9
120	203.0	116.9	6.656	113.4	190.4	113.1	6.155	110.2	110-120	120.9	5102	96.2,96.2
130	156.8	81.40	8.255	90.46	148.2	90.31	7.710	76.41	120-130	84.76	5187	97.8,97.8
140	117.5	59.00	9.700	72.02	111.9	71.80	9.141	55.02	130-140	56.32	5243	98.8,98.8
150	84.66	41.88	11.05	54.15	81.39	54.18	10.46	39.23	140-150	34.74	5278	99.5,99.5
160	56.83	30.06	12.06	36.02	52.46	35.87	11.55	29.17	150-160	18.64	5297	99.8,99.8
170	29.25	19.74	12.55	20.21	25.42	20.11	12.24	19.80	160-170	7.652	5304	100,100
180	12.54	12.73	12.71	12.85	12.50	12.74	12.70	12.89	170-180	1.575	5306	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2161.5 lm

%lum = 40.7%

%lamp = 40.7%

Conical surface Flux(120deg): 3253.1 lm

%lum = 61.3%


%lamp = 61.3%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.30V I:0.1706A P:37.727W PF:0.9202 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5306.02x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

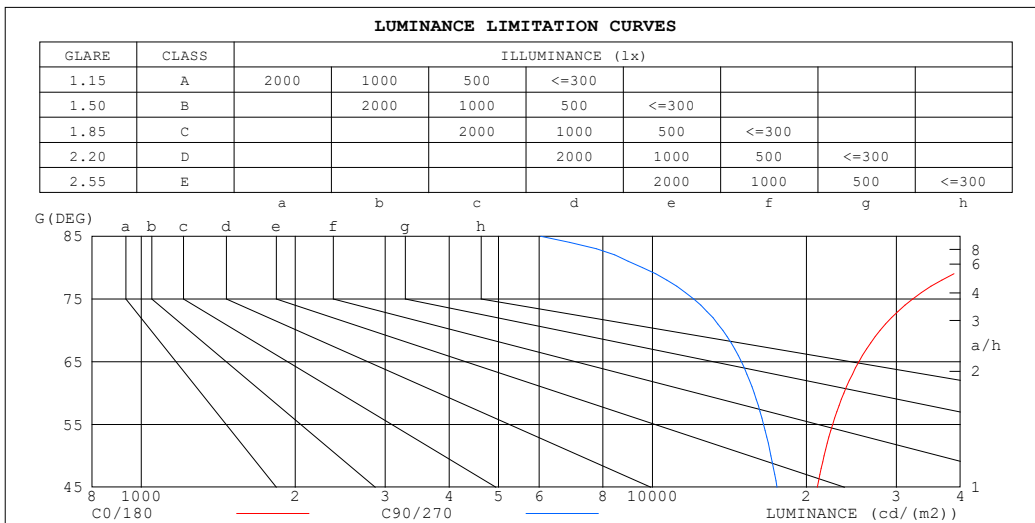

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	70987	6044
80	41467	9564
75	32283	12038
70	27891	13726
65	25349	14925
60	23678	15812
55	22516	16492
50	21664	17051
45	21022	17525


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.30V I:0.1706A P:37.727W PF:0.9202 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5306.02x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.97	.97	.97	.90	.90	.90	.87
1.0	.98	.93	.89	.95	.90	.86	.88	.84	.81	.82	.79	.76	.76	.74	.72	.68
2.0	.85	.77	.71	.81	.75	.69	.76	.70	.65	.70	.66	.62	.66	.62	.59	.56
3.0	.74	.65	.58	.71	.63	.57	.66	.59	.54	.62	.56	.51	.57	.53	.49	.46
4.0	.65	.56	.49	.63	.54	.48	.58	.51	.45	.55	.48	.43	.51	.46	.41	.39
5.0	.58	.48	.41	.56	.47	.41	.52	.45	.39	.49	.42	.37	.46	.40	.36	.33
6.0	.52	.43	.36	.50	.42	.35	.47	.39	.34	.44	.38	.33	.41	.36	.31	.29
7.0	.47	.38	.32	.45	.37	.31	.43	.35	.30	.40	.34	.29	.38	.32	.28	.25
8.0	.43	.34	.28	.41	.33	.27	.39	.32	.27	.37	.30	.26	.34	.29	.25	.23
9.0	.39	.31	.25	.38	.30	.25	.36	.29	.24	.34	.27	.23	.32	.26	.22	.20
10.0	.36	.28	.23	.35	.27	.22	.33	.26	.22	.31	.25	.21	.29	.24	.20	.18

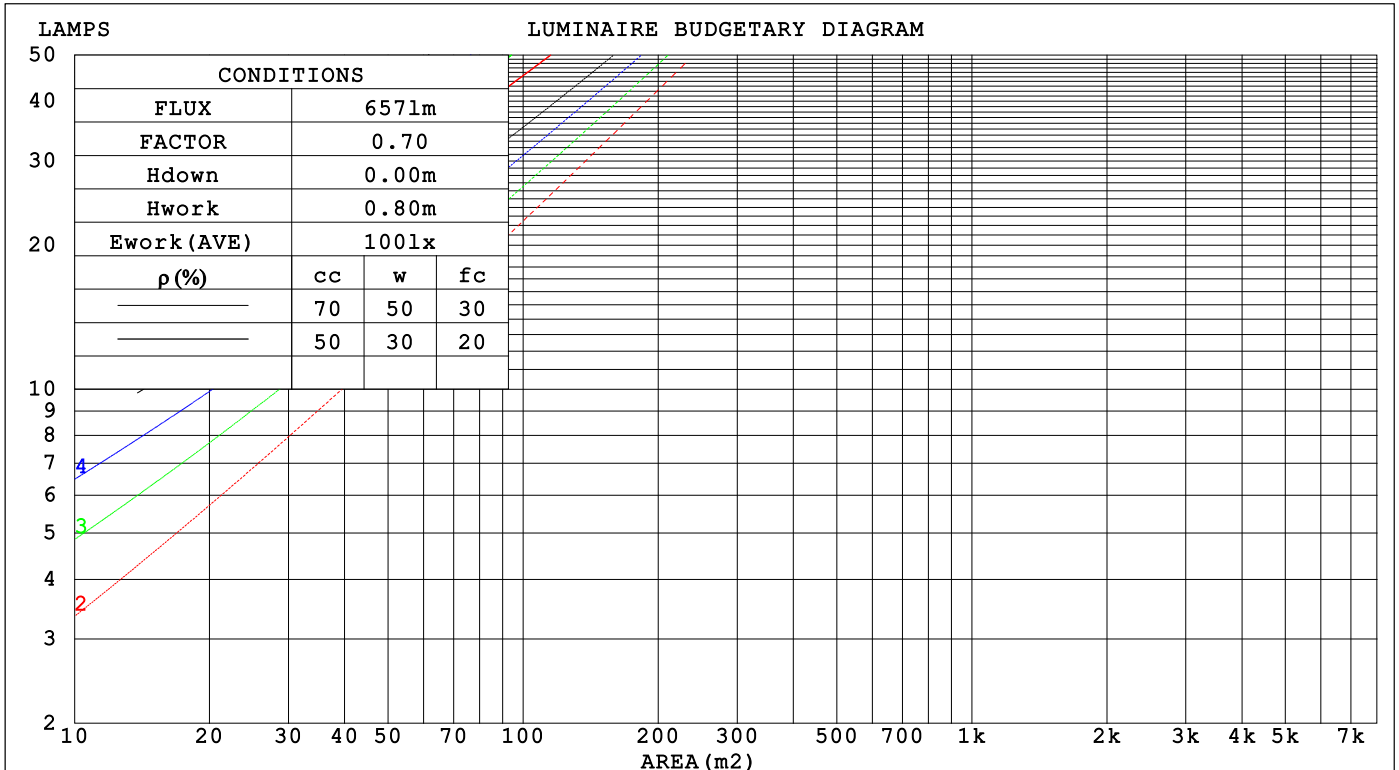

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.30V I:0.1706A P:37.727W PF:0.9202 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5306.02x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.358	.204	.065	.347	.198	.063	.326	.187	.060	.307	.177	.057	.289	.168	.054	
2.0	.318	.174	.053	.308	.170	.052	.289	.161	.050	.272	.152	.048	.256	.145	.046	
3.0	.286	.152	.046	.277	.148	.045	.260	.141	.043	.244	.134	.041	.230	.127	.039	
4.0	.260	.135	.040	.252	.132	.039	.236	.125	.037	.222	.119	.036	.209	.113	.035	
5.0	.237	.121	.035	.230	.118	.034	.216	.113	.033	.203	.107	.032	.191	.102	.031	
6.0	.218	.109	.031	.212	.107	.031	.199	.102	.030	.187	.097	.029	.176	.093	.028	
7.0	.202	.100	.028	.196	.098	.028	.185	.093	.027	.174	.089	.026	.164	.085	.025	
8.0	.188	.092	.026	.182	.090	.025	.172	.086	.025	.162	.082	.024	.153	.078	.023	
9.0	.175	.085	.024	.170	.083	.023	.161	.079	.023	.152	.076	.022	.143	.073	.021	
10.0	.164	.079	.022	.160	.077	.022	.151	.074	.021	.143	.071	.020	.135	.068	.019	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.291	.291	.291	.248	.248	.248	.170	.170	.170	.097	.097	.097	.031	.031	.031	
1.0	.285	.257	.232	.244	.220	.199	.167	.152	.138	.096	.088	.080	.031	.028	.026	
2.0	.277	.233	.197	.238	.201	.170	.163	.139	.118	.094	.081	.069	.030	.026	.023	
3.0	.270	.217	.174	.231	.187	.151	.159	.130	.106	.092	.076	.062	.029	.025	.020	
4.0	.262	.204	.159	.225	.176	.139	.155	.123	.098	.089	.072	.058	.029	.023	.019	
5.0	.255	.194	.149	.219	.168	.130	.151	.117	.092	.087	.069	.054	.028	.022	.018	
6.0	.247	.186	.142	.213	.161	.123	.147	.113	.087	.085	.066	.052	.027	.022	.017	
7.0	.240	.179	.136	.207	.155	.119	.143	.109	.084	.083	.064	.050	.027	.021	.017	
8.0	.234	.174	.132	.201	.151	.115	.139	.106	.082	.081	.062	.049	.026	.020	.016	
9.0	.227	.169	.129	.196	.146	.113	.136	.103	.080	.079	.061	.048	.026	.020	.016	
10.0	.222	.165	.126	.191	.143	.110	.133	.101	.078	.077	.059	.047	.025	.020	.016	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.30V I:0.1706A P:37.727W PF:0.9202 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5306.02x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.1	24.5	23.5	24.9	25.4	21.7	23.1	22.2	23.5	24.0
3H	25.4	26.7	25.9	27.2	27.7	23.2	24.5	23.6	24.9	25.4
4H	26.6	27.9	27.1	28.3	28.9	23.7	24.9	24.2	25.4	25.9
6H	28.0	29.1	28.5	29.6	30.2	24.0	25.2	24.6	25.7	26.3
8H	28.7	29.8	29.2	30.3	30.9	24.1	25.2	24.7	25.8	26.3
12H	29.5	30.6	30.0	31.1	31.7	24.1	25.2	24.7	25.7	26.3
4H 2H	23.7	24.9	24.2	25.4	25.9	22.6	23.9	23.1	24.3	24.9
3H	26.2	27.3	26.7	27.8	28.4	24.4	25.4	24.9	25.9	26.5
4H	27.6	28.6	28.1	29.1	29.7	25.1	26.1	25.6	26.6	27.2
6H	29.1	30.0	29.7	30.5	31.2	25.6	26.5	26.2	27.1	27.7
8H	29.9	30.7	30.5	31.3	32.0	25.8	26.6	26.4	27.2	27.8
12H	30.9	31.6	31.5	32.2	32.9	25.9	26.6	26.5	27.2	27.9
8H 4H	27.9	28.7	28.5	29.3	29.9	25.8	26.6	26.4	27.2	27.9
6H	29.6	30.3	30.3	31.0	31.7	26.7	27.4	27.3	28.0	28.7
8H	30.7	31.3	31.3	31.9	32.6	27.0	27.6	27.7	28.3	29.0
12H	31.9	32.4	32.5	33.1	33.8	27.3	27.8	28.0	28.5	29.2
12H 4H	27.9	28.7	28.5	29.3	29.9	26.0	26.8	26.6	27.4	28.1
6H	29.7	30.4	30.4	31.0	31.7	27.1	27.7	27.7	28.3	29.0
8H	30.9	31.4	31.5	32.1	32.8	27.6	28.1	28.2	28.8	29.5

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.1 / - 0.1	+ 0.1 / - 0.2
1.5H	+ 0.2 / - 0.2	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.5

CIE Pub.117, 5306 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.8)
 Area: 0.070821 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.30V I:0.1706A P:37.727W PF:0.9202 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5306.02x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	51	39	32	50	38	31	48	37	31	24
0.80	60	48	40	59	47	40	56	46	39	31
1.00	68	56	48	66	55	47	63	56	46	38
1.25	75	63	55	73	62	54	69	60	53	44
1.50	80	69	61	78	67	60	73	65	58	48
2.00	87	77	69	85	75	68	79	72	66	55
2.50	92	82	75	89	80	73	83	76	70	59
3.00	95	87	80	92	84	78	86	80	75	63
4.00	100	93	87	96	90	84	90	85	80	67
5.00	103	96	91	99	93	89	92	88	84	70
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.30V I:0.1706A P:37.727W PF:0.9202 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5306.02x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

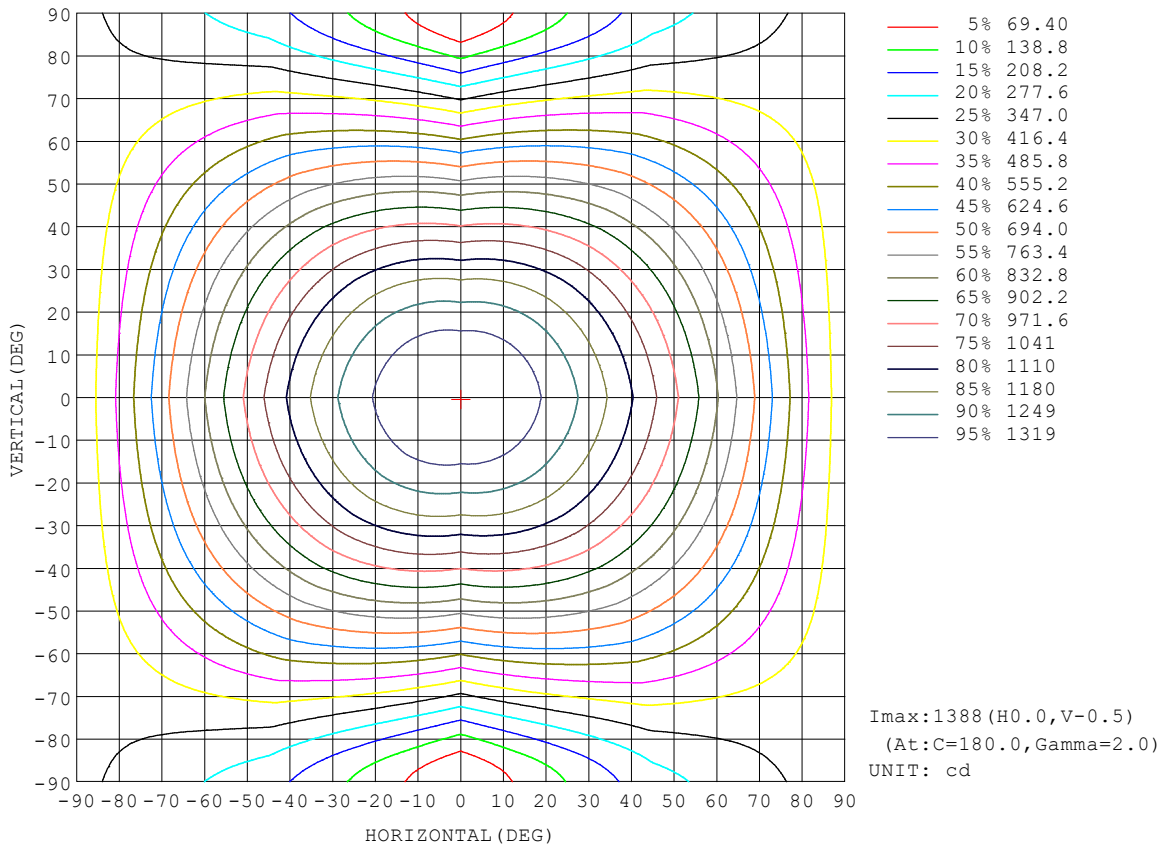


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.30V I:0.1706A P:37.727W PF:0.9202 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5306.02x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

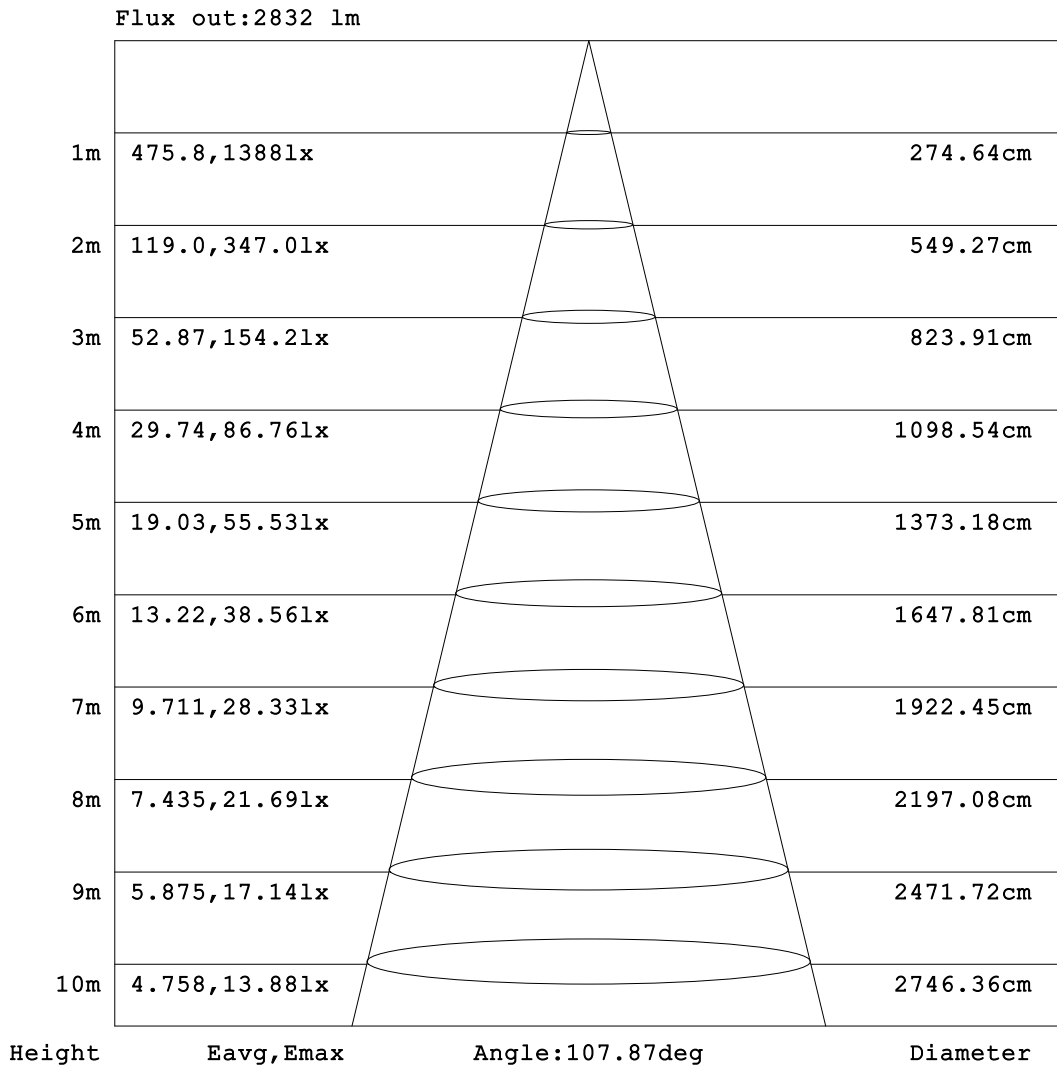


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.30V I:0.1706A P:37.727W PF:0.9202 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5306.02x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

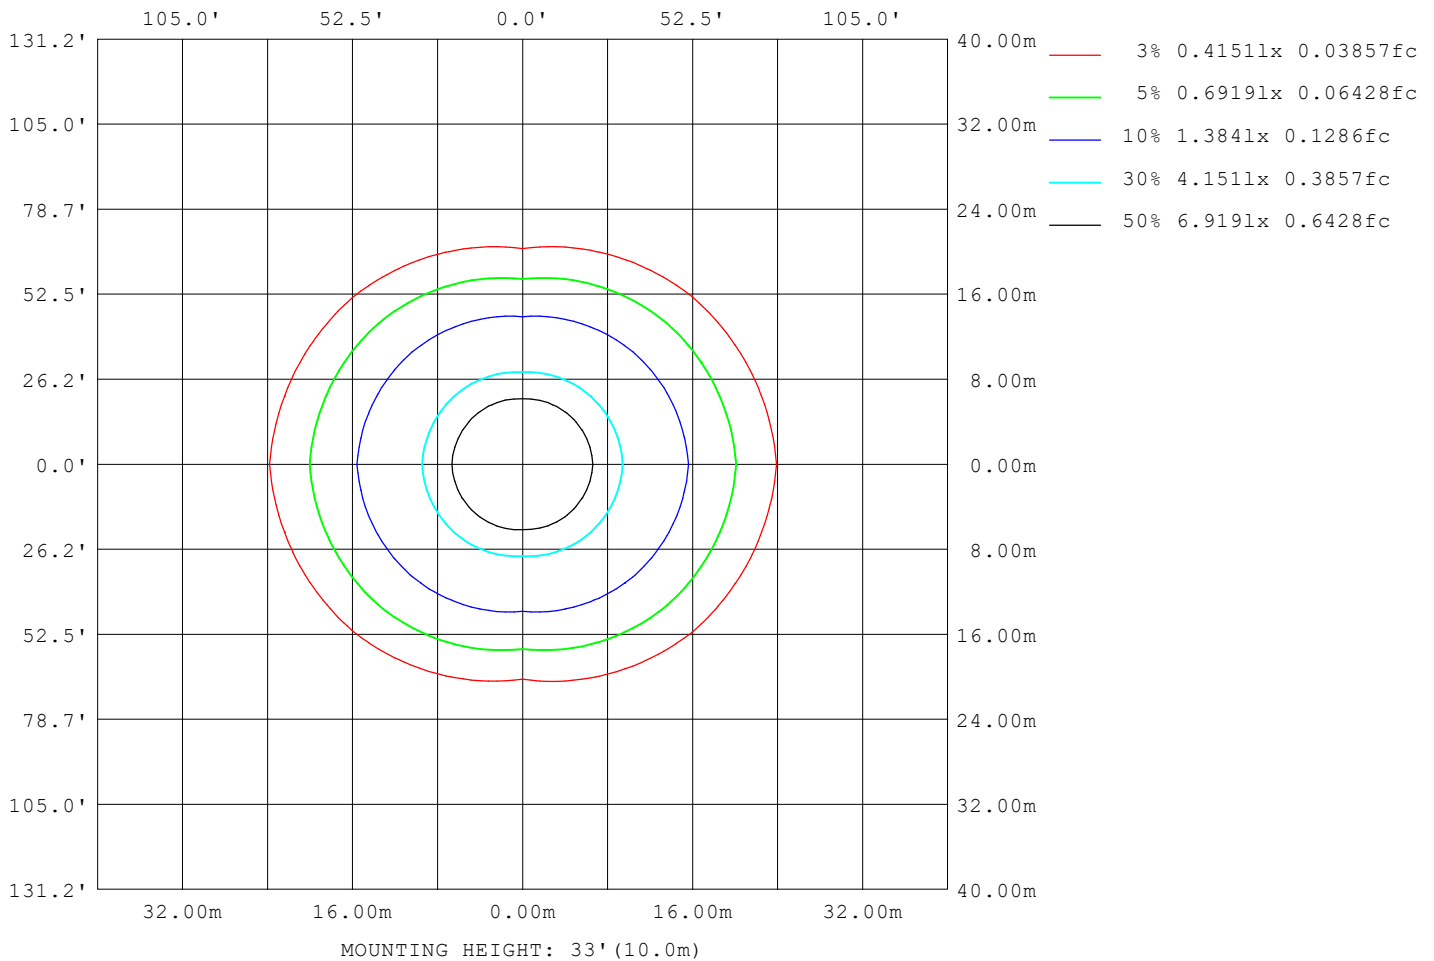

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.30V I:0.1706A P:37.727W PF:0.9202 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5306.02x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	25264
L_0~180 (75) av	32104
L_0~180 (85) av	69911
L_90~270 (65) av	14993
L_90~270 (75) av	12221
L_90~270 (85) av	6371
L_45 (65) av	21035
L_45 (75) av	24521
L_45 (85) av	47307

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

Planar Illuminance Curve

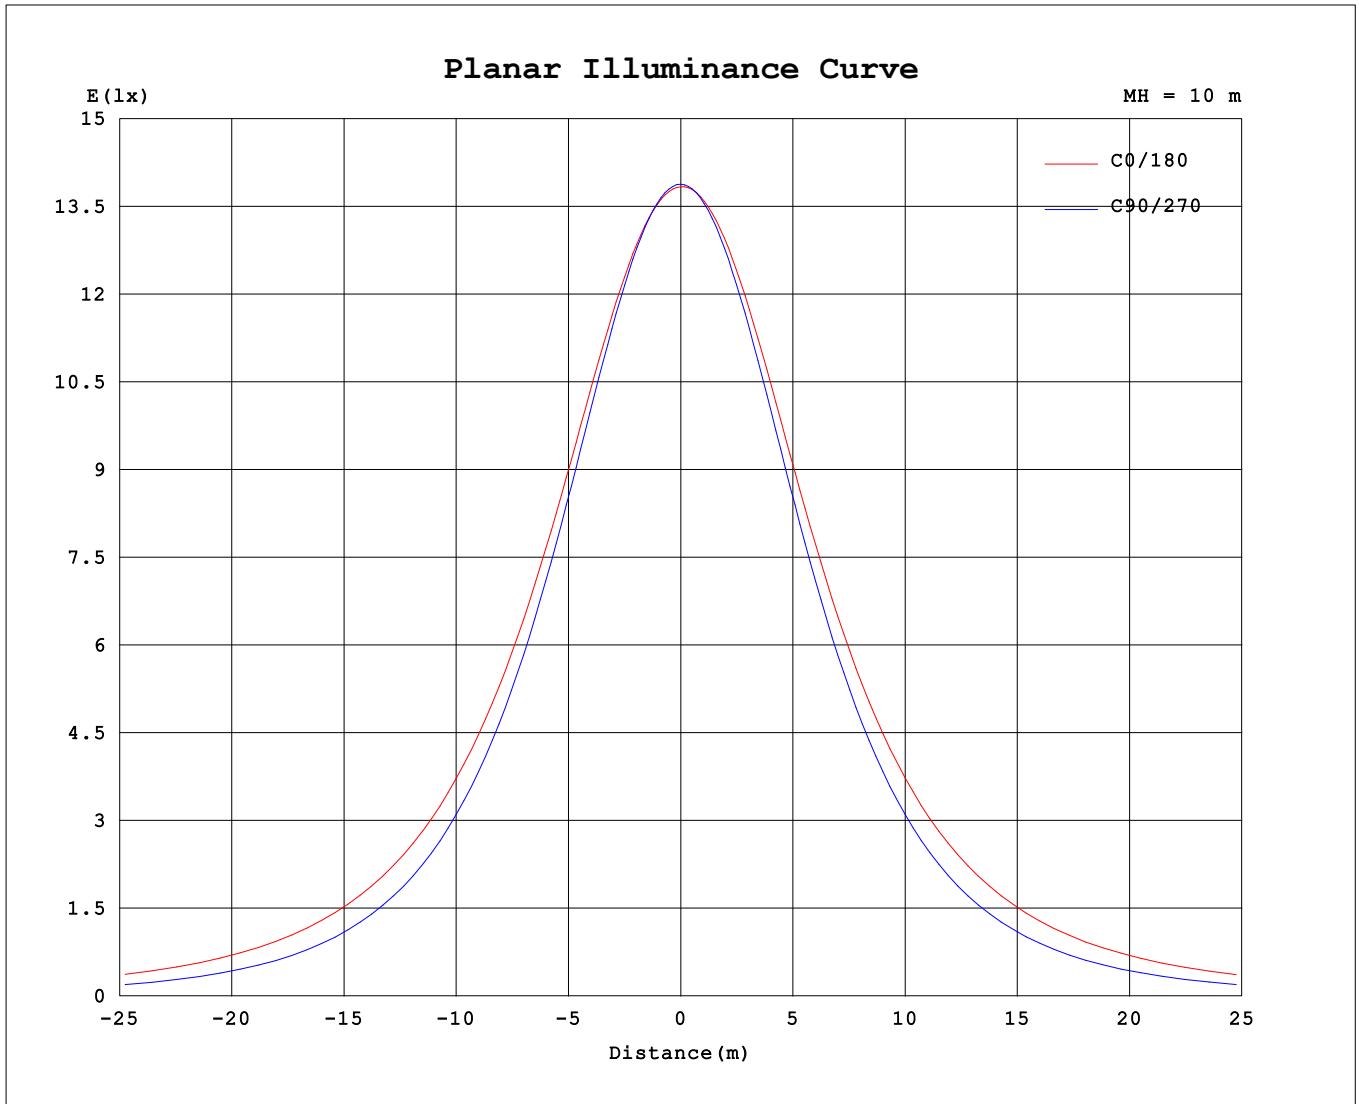

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.30V I:0.1706A P:37.727W PF:0.9202 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:5306.02x1 lm		
NAME: E-B40W-E	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315											
0	1386	1386	1386	1386	1386	1386	1386	1386											
5	1381	1380	1379	1383	1386	1383	1379	1379											
10	1367	1362	1357	1368	1376	1367	1357	1361											
15	1345	1334	1322	1342	1356	1341	1322	1332											
20	1313	1295	1273	1304	1326	1302	1273	1293											
25	1274	1247	1213	1256	1287	1253	1212	1244											
30	1227	1190	1141	1198	1239	1195	1141	1186											
35	1175	1125	1061	1131	1185	1129	1061	1121											
40	1117	1054	972	1058	1123	1056	972	1050											
45	1055	978	877	979	1057	977	878	973											
50	988	896	775	895	987	894	777	892											
55	916	811	669	808	912	808	672	807											
60	840	723	559	719	834	719	563	719											
65	760	634	446	627	752	628	451	629											
70	677	543	332	536	668	537	339	539											
75	593	454	220	446	584	448	228	450											
80	511	370	117	361	500	363	125	367											
85	439	299	37.3	286	424	288	41.4	295											
90	389	252	2.44	234	365	235	2.16	248											
95	353	223	2.97	205	329	205	2.56	219											
100	319	197	3.66	181	297	181	3.27	193											
105	287	175	4.27	161	267	160	3.85	171											
110	257	155	5.05	143	240	142	4.59	151											
115	229	132	5.85	127	214	127	5.36	131											
120	203	117	6.66	113	190	113	6.15	110											
125	179	96.1	7.46	101	169	101	6.94	90.9											
130	157	81.4	8.25	90.5	148	90.3	7.71	76.4											
135	136	69.3	9.00	80.9	129	80.7	8.46	64.5											
140	117	59.0	9.70	72.0	112	71.8	9.14	55.0											
145	100	49.8	10.3	63.3	96.0	63.1	9.83	46.4											
150	84.7	41.9	11.1	54.1	81.4	54.2	10.5	39.2											
155	70.2	34.9	11.6	44.9	67.0	44.7	11.0	33.2											
160	56.8	30.1	12.1	36.0	52.5	35.9	11.5	29.2											
165	43.3	24.9	12.3	27.4	37.8	27.5	12.0	24.7											
170	29.3	19.7	12.6	20.2	25.4	20.1	12.2	19.8											
175	15.7	15.6	12.7	15.2	14.7	14.9	12.5	15.8											
180	12.5	12.7	12.7	12.8	12.5	12.7	12.7	12.9											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks: