
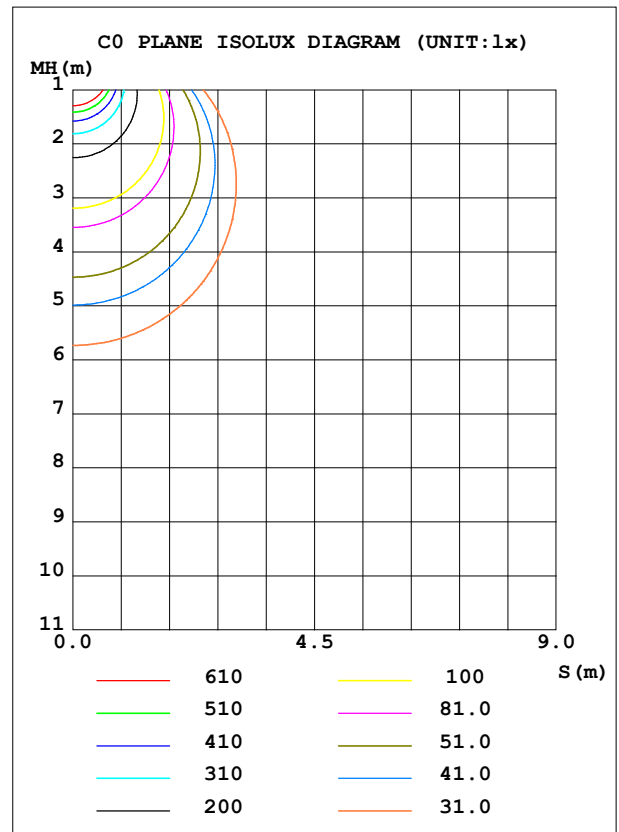


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.27V I:0.1366A P:29.174W PF:0.8889 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3947.76x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	E-B40W-E	Imax (cd)	1020	S/MH (C0/180)	1.35
NOMINAL POWER (W)	25	LOR (%)	100.0	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	3947.8	η UP, DN (C0-180)	7.0, 43.8
NOMINAL FLUX (lm)	3947.76	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	6.4, 42.9
LAMPS INSIDE	1	η up (%)	13.3	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	240	η down (%)	86.7	CIBSE SHR MAX	1.50

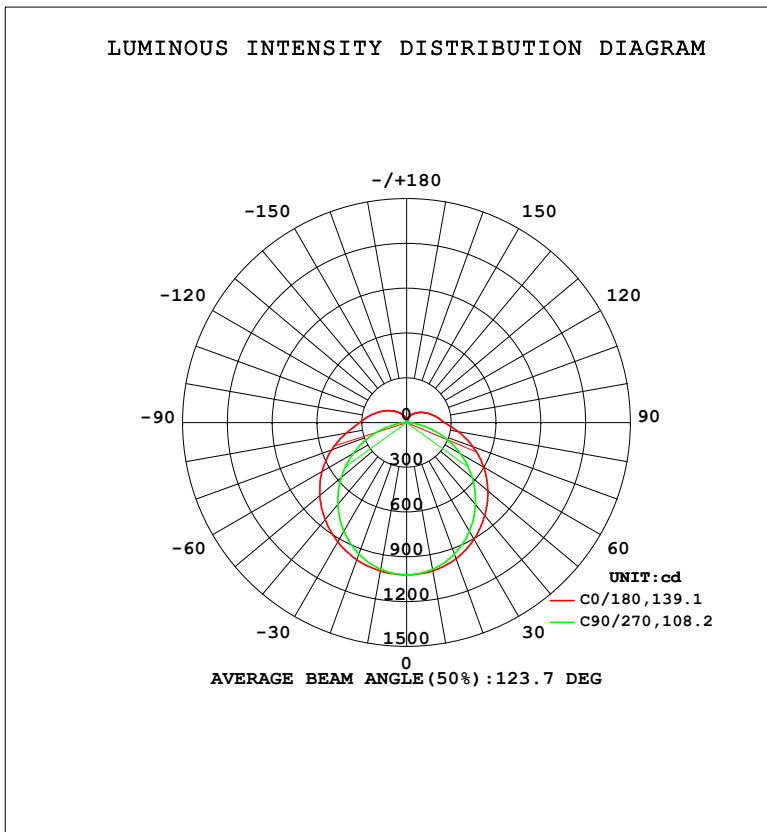

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1010	1005	998.2	1004	1009	1003	998.5	1004	0- 10	96.58	96.58	2.45,2.45
20	977.6	960.7	936.9	954.5	970.0	954.0	937.3	959.4	10- 20	277.9	374.4	9.48,9.48
30	922.6	888.5	840.1	873.6	903.1	872.9	841.4	887.1	20- 30	424.6	799.1	20.2,20.2
40	849.6	794.5	716.5	768.4	814.2	768.4	718.2	792.4	30- 40	520.0	1319	33.4,33.4
50	759.6	683.0	572.0	645.9	711.0	646.5	574.4	680.8	40- 50	556.0	1875	47.5,47.5
60	653.8	558.7	412.8	514.1	596.2	514.9	416.3	556.1	50- 60	532.0	2407	61,61
70	534.6	426.5	245.4	378.7	474.1	380.3	250.4	424.3	60- 70	454.6	2862	72.5,72.5
80	410.8	297.6	87.67	250.6	351.0	252.4	92.43	295.9	70- 80	338.7	3200	81.1,81.1
90	315.4	206.0	1.785	160.6	254.2	161.1	1.594	203.5	80- 90	220.4	3421	86.7,86.7
100	256.6	160.1	2.733	125.9	209.0	126.0	2.421	157.2	90-100	159.0	3580	90.7,90.7
110	205.3	124.4	3.761	100.5	170.3	100.4	3.409	121.9	100-110	123.2	3703	93.8,93.8
120	161.2	92.92	4.943	80.77	136.3	80.94	4.558	88.27	110-120	91.47	3794	96.1,96.1
130	124.0	63.86	6.129	65.03	106.5	65.03	5.716	60.54	120-130	63.97	3858	97.7,97.7
140	92.69	45.74	7.185	52.18	80.81	52.10	6.781	43.19	130-140	42.39	3901	98.8,98.8
150	66.13	32.14	8.202	39.45	59.18	39.54	7.760	30.49	140-150	26.11	3927	99.5,99.5
160	44.01	22.81	8.947	26.43	38.38	26.36	8.571	22.38	150-160	13.98	3941	99.8,99.8
170	22.23	14.84	9.306	14.94	18.81	14.89	9.088	14.92	160-170	5.732	3947	100,100
180	9.292	9.453	9.416	9.520	9.277	9.432	9.419	9.547	170-180	1.173	3948	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1596.4 lm

%lum = 40.4%

%lamp = 40.4%

Conical surface Flux(120deg): 2407.1 lm

%lum = 61.0%


%lamp = 61.0%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.27V I:0.1366A P:29.174W PF:0.8889 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3947.76x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

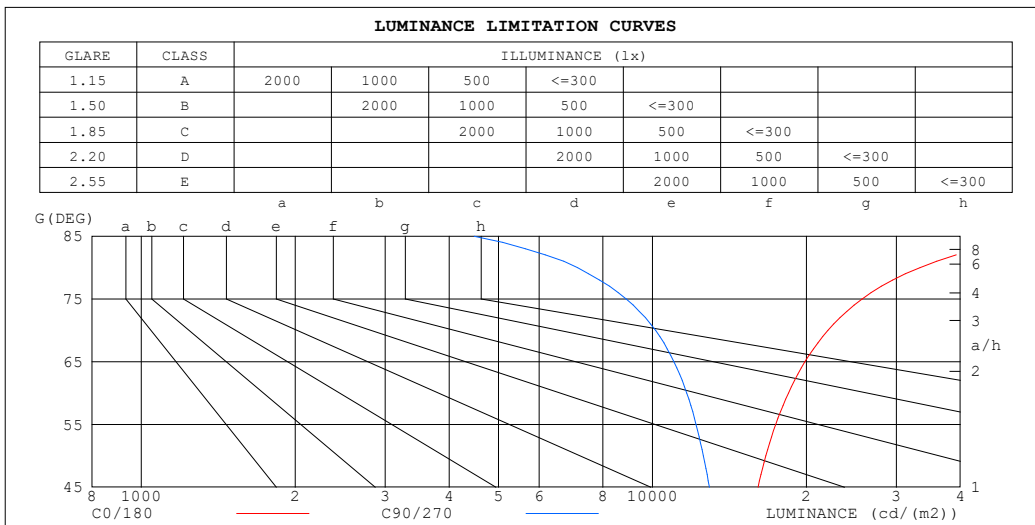

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	57547	4479
80	33368	7134
75	25729	8881
70	22045	10141
65	19874	11016
60	18442	11666
55	17426	12170
50	16666	12575
45	16080	12920


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.27V I:0.1366A P:29.174W PF:0.8889 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3947.76x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.96	.96	.96	.90	.90	.90	.87
1.0	.98	.93	.89	.94	.90	.86	.88	.84	.81	.81	.79	.76	.76	.73	.71	.68
2.0	.84	.77	.71	.81	.74	.69	.76	.70	.65	.70	.66	.62	.65	.62	.58	.55
3.0	.74	.65	.58	.71	.63	.56	.66	.59	.54	.61	.56	.51	.57	.53	.49	.46
4.0	.65	.56	.48	.62	.54	.47	.58	.51	.45	.54	.48	.43	.51	.46	.41	.39
5.0	.58	.48	.41	.56	.47	.40	.52	.45	.39	.49	.42	.37	.45	.40	.36	.33
6.0	.52	.42	.36	.50	.41	.35	.47	.39	.34	.44	.37	.32	.41	.35	.31	.29
7.0	.47	.38	.31	.45	.37	.31	.42	.35	.30	.40	.33	.29	.37	.32	.27	.25
8.0	.42	.34	.28	.41	.33	.27	.39	.32	.26	.36	.30	.25	.34	.29	.24	.22
9.0	.39	.31	.25	.38	.30	.24	.36	.29	.24	.34	.27	.23	.32	.26	.22	.20
10.0	.36	.28	.22	.35	.27	.22	.33	.26	.21	.31	.25	.21	.29	.24	.20	.18

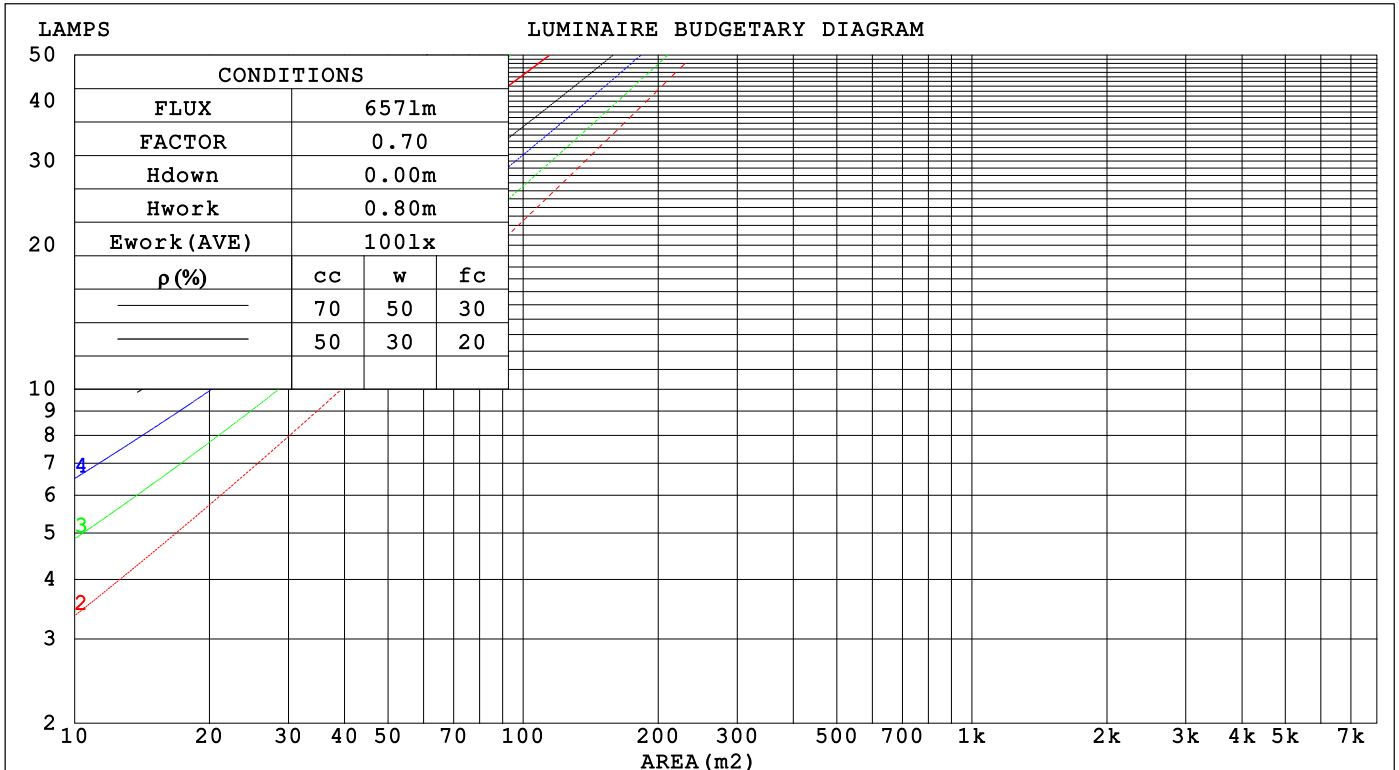

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.27V I:0.1366A P:29.174W PF:0.8889 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3947.76x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.359	.204	.065	.348	.199	.063	.327	.188	.060	.308	.177	.057	.290	.168	.054	
2.0	.319	.175	.054	.309	.170	.052	.290	.161	.050	.272	.153	.048	.256	.145	.046	
3.0	.287	.153	.046	.278	.149	.045	.261	.141	.043	.245	.134	.041	.230	.127	.039	
4.0	.260	.135	.040	.252	.132	.039	.236	.125	.037	.222	.119	.036	.209	.113	.035	
5.0	.238	.121	.035	.230	.118	.034	.216	.113	.033	.203	.107	.032	.191	.102	.031	
6.0	.219	.110	.031	.212	.107	.031	.199	.102	.030	.187	.097	.029	.176	.093	.028	
7.0	.202	.100	.028	.196	.098	.028	.185	.093	.027	.174	.089	.026	.164	.085	.025	
8.0	.188	.092	.026	.182	.090	.025	.172	.086	.025	.162	.082	.024	.153	.078	.023	
9.0	.176	.085	.024	.170	.083	.023	.161	.079	.023	.152	.076	.022	.143	.073	.021	
10.0	.165	.079	.022	.160	.077	.022	.151	.074	.021	.142	.071	.020	.134	.068	.019	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.292	.292	.292	.250	.250	.250	.170	.170	.170	.098	.098	.098	.031	.031	.031	
2.0	.286	.258	.233	.245	.222	.201	.168	.152	.139	.096	.088	.081	.031	.028	.026	
3.0	.279	.235	.198	.239	.202	.171	.164	.140	.119	.094	.081	.070	.030	.026	.023	
4.0	.271	.218	.176	.233	.188	.152	.160	.131	.107	.092	.076	.063	.030	.025	.021	
5.0	.264	.205	.161	.226	.178	.140	.156	.124	.098	.090	.072	.058	.029	.024	.019	
6.0	.256	.195	.151	.220	.169	.131	.152	.118	.093	.088	.069	.055	.028	.023	.018	
7.0	.249	.187	.143	.214	.162	.125	.148	.114	.088	.086	.067	.052	.028	.022	.017	
8.0	.242	.181	.138	.208	.157	.120	.144	.110	.085	.084	.065	.051	.027	.021	.017	
9.0	.235	.175	.134	.203	.152	.117	.140	.107	.083	.082	.063	.049	.026	.021	.016	
10.0	.229	.170	.131	.197	.148	.114	.137	.104	.081	.080	.061	.048	.026	.020	.016	
10.0	.223	.166	.128	.193	.144	.112	.134	.101	.079	.078	.060	.047	.025	.020	.016	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.27V I:0.1366A P:29.174W PF:0.8889 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3947.76x1 lm										
NAME: E-B40W-E				TYPE: 25W				WEIGHT:		
SPEC.: 5700K				DIM.:				SERIAL No.:		
MFR.: EVERFINE				SUR.: 1.161*0.061				Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.3	23.7	22.8	24.2	24.6	20.8	22.2	21.2	22.6	23.1
3H	24.7	26.0	25.2	26.5	27.0	22.2	23.5	22.7	24.0	24.5
4H	26.0	27.2	26.5	27.7	28.2	22.8	24.0	23.3	24.5	25.0
6H	27.3	28.5	27.9	29.0	29.6	23.1	24.3	23.6	24.8	25.3
8H	28.1	29.2	28.6	29.7	30.3	23.2	24.3	23.7	24.8	25.4
12H	29.0	30.0	29.5	30.6	31.1	23.2	24.3	23.8	24.8	25.4
4H 2H	22.9	24.1	23.4	24.6	25.1	21.7	23.0	22.2	23.5	24.0
3H	25.5	26.6	26.0	27.1	27.7	23.5	24.6	24.0	25.1	25.7
4H	26.9	27.9	27.5	28.5	29.1	24.2	25.2	24.8	25.7	26.4
6H	28.5	29.4	29.1	29.9	30.6	24.8	25.6	25.3	26.2	26.9
8H	29.3	30.2	30.0	30.8	31.4	24.9	25.7	25.5	26.3	27.0
12H	30.4	31.1	31.0	31.7	32.4	25.0	25.8	25.6	26.4	27.1
8H 4H	27.2	28.1	27.8	28.6	29.3	25.0	25.9	25.6	26.4	27.1
6H	29.1	29.7	29.7	30.4	31.1	25.9	26.6	26.6	27.2	27.9
8H	30.1	30.7	30.8	31.4	32.1	26.3	26.9	26.9	27.5	28.3
12H	31.4	31.9	32.0	32.6	33.3	26.5	27.1	27.2	27.7	28.5
12H 4H	27.3	28.0	27.9	28.6	29.3	25.2	26.0	25.9	26.6	27.3
6H	29.2	29.8	29.8	30.4	31.2	26.3	26.9	27.0	27.6	28.3
8H	30.3	30.9	31.0	31.5	32.3	26.9	27.4	27.5	28.0	28.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.5				

CIE Pub.117, 3948 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.8)
 Area: 0.070821 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.27V I:0.1366A P:29.174W PF:0.8889 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3947.76x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	51	38	31	50	38	31	48	37	31	24
0.80	60	47	40	59	47	39	56	46	39	31
1.00	68	56	48	66	55	47	63	55	46	38
1.25	75	63	55	73	62	54	69	60	53	44
1.50	80	69	60	78	67	60	73	64	58	48
2.00	87	77	69	84	75	68	79	72	65	55
2.50	92	82	75	88	80	73	83	76	70	59
3.00	95	87	80	92	84	78	86	80	74	62
4.00	100	92	86	96	90	84	90	84	80	67
5.00	102	96	91	99	93	88	92	88	84	70
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.27V I:0.1366A P:29.174W PF:0.8889 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3947.76x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

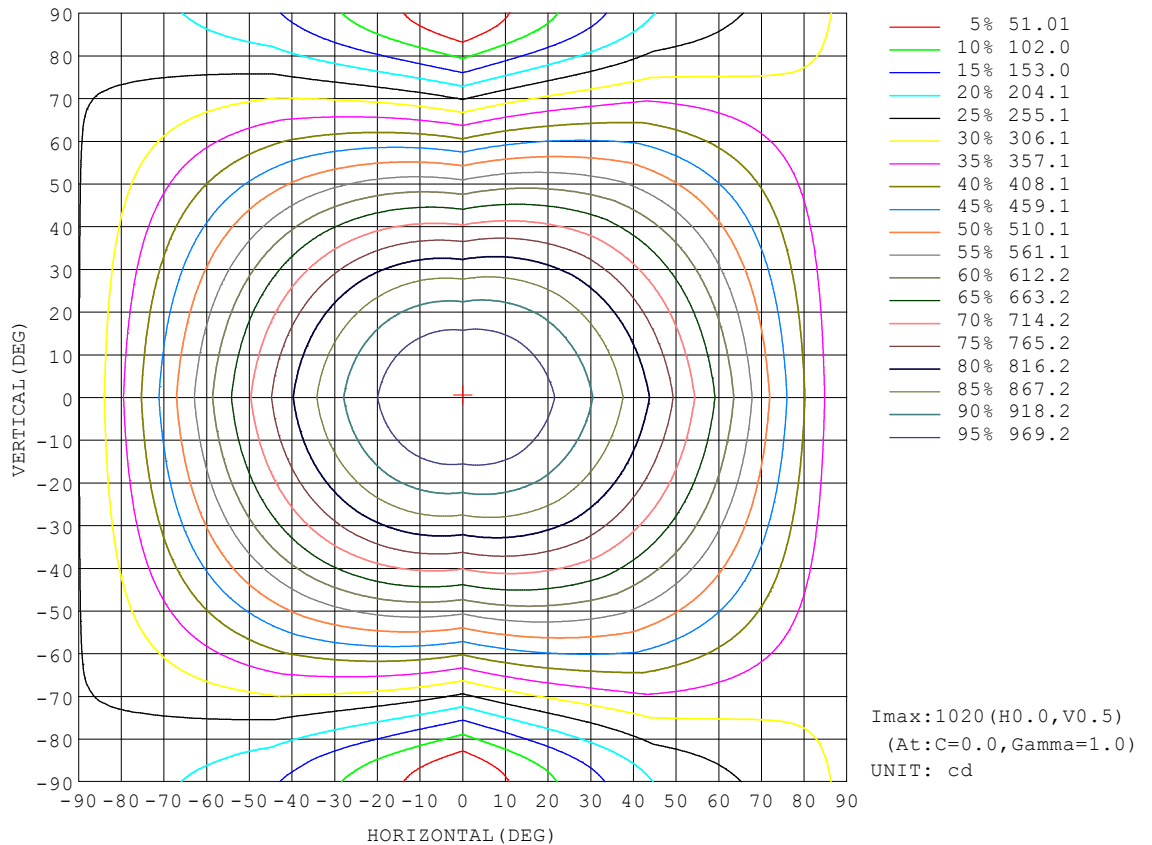


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.27V I:0.1366A P:29.174W PF:0.8889 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3947.76x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

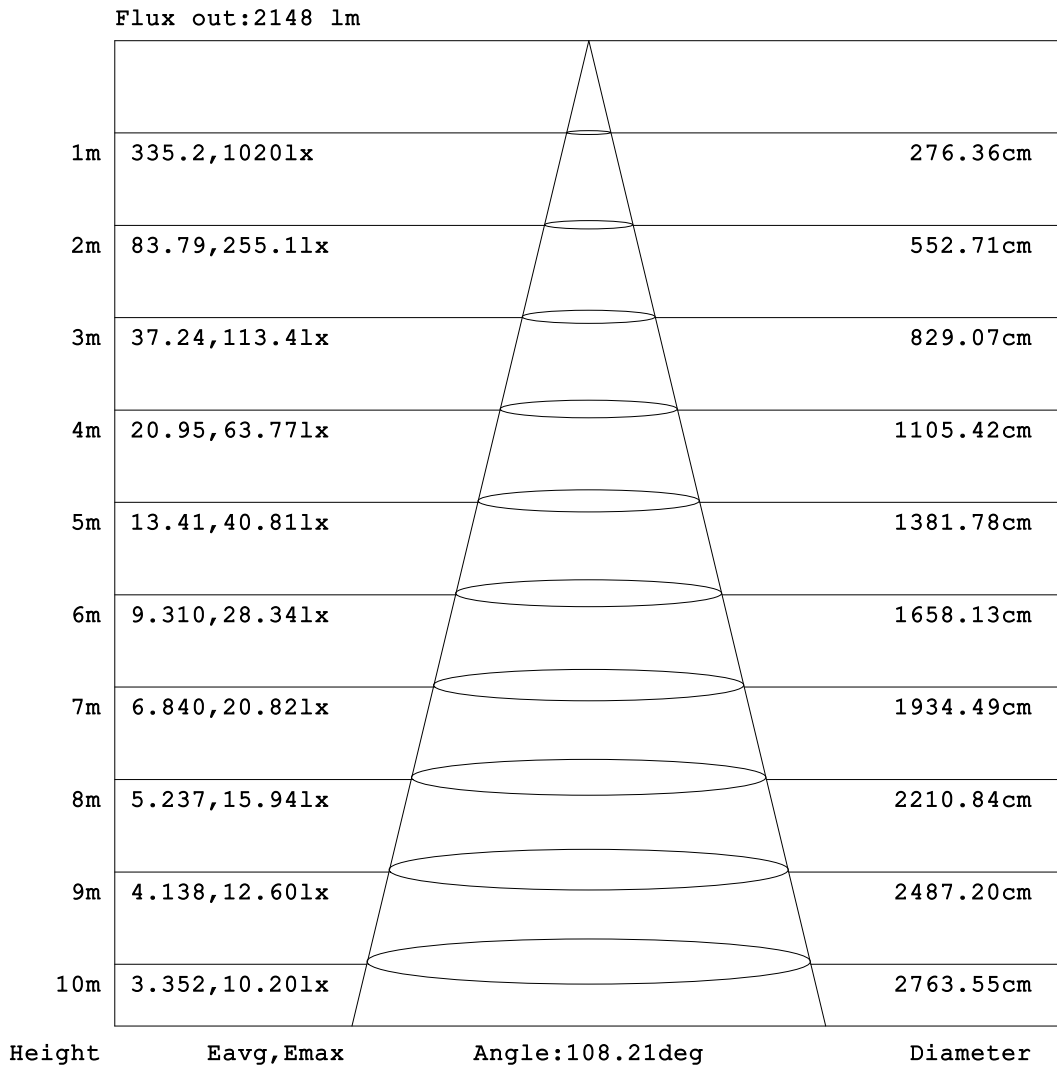


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.27V I:0.1366A P:29.174W PF:0.8889 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3947.76x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

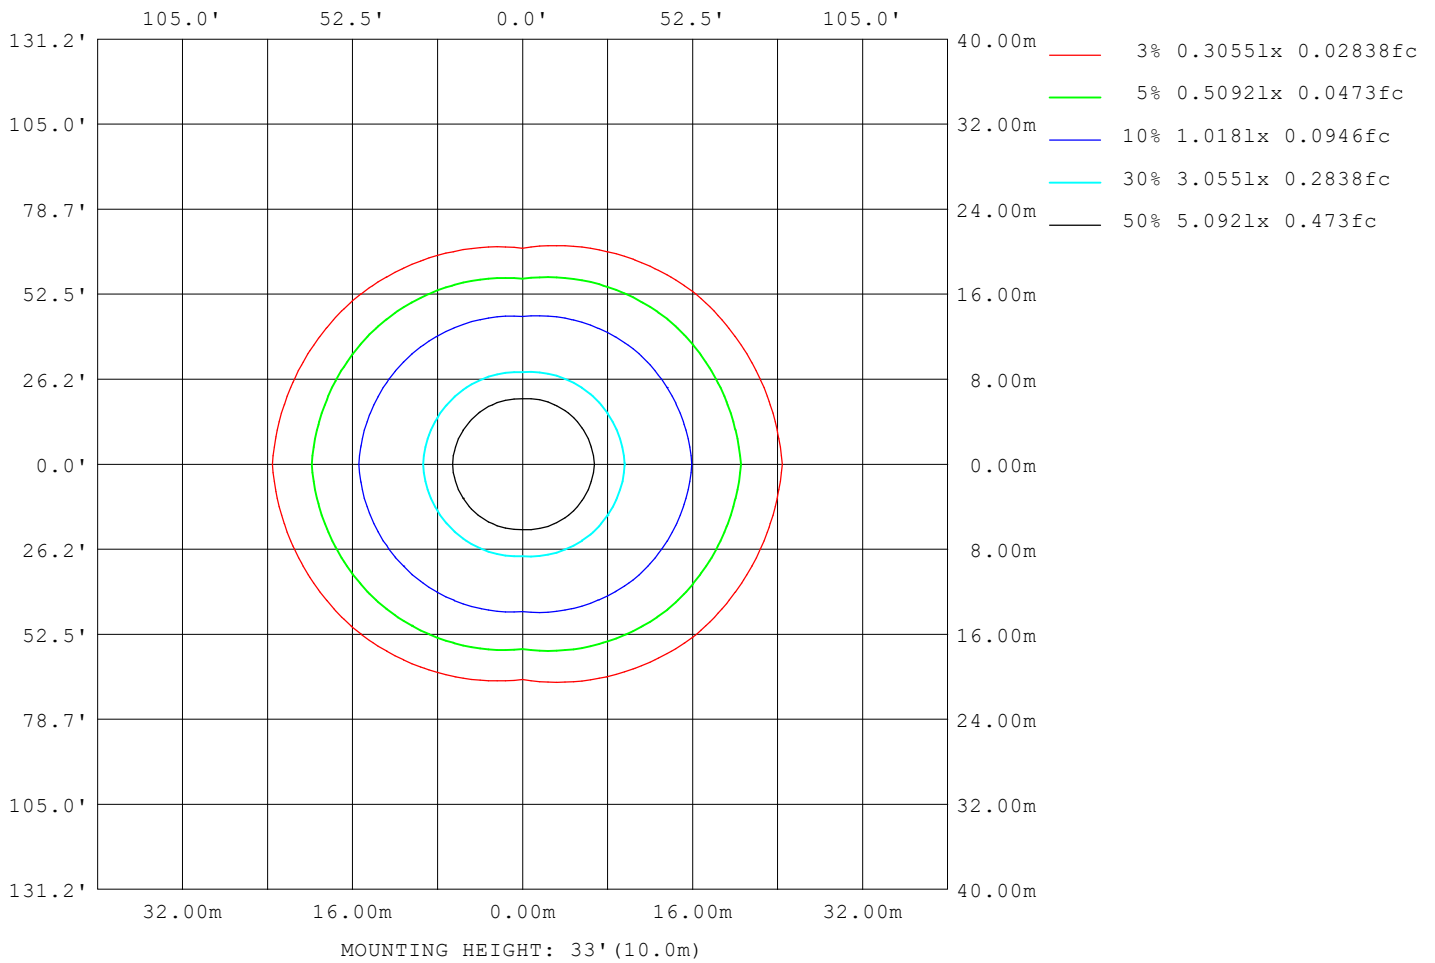

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.27V I:0.1366A P:29.174W PF:0.8889 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3947.76x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	18903
L_0~180 (75) av	24127
L_0~180 (85) av	52765
L_90~270 (65) av	11081
L_90~270 (75) av	9046
L_90~270 (85) av	4711
L_45 (65) av	15683
L_45 (75) av	18356
L_45 (85) av	35640

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

Planar Illuminance Curve

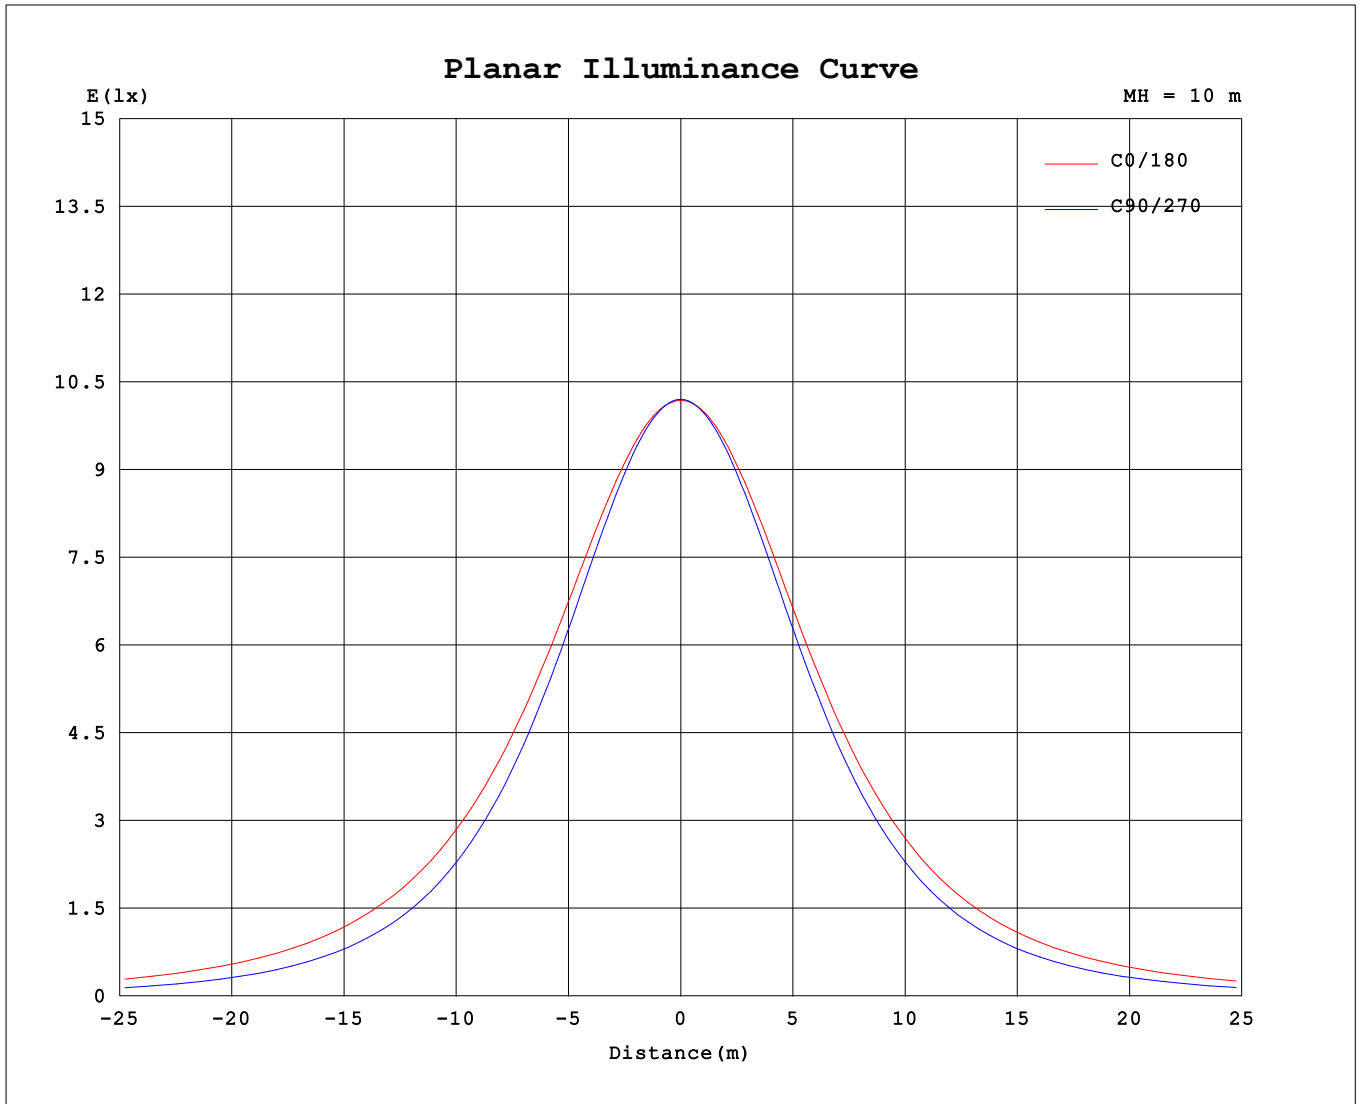

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.27V I:0.1366A P:29.174W PF:0.8889 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3947.76x1 lm		
NAME: E-B40W-E	TYPE: 25W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315										
0	1020	1020	1020	1020	1020	1020	1020	1020										
5	1017	1016	1014	1016	1017	1015	1014	1016										
10	1010	1005	998	1004	1009	1003	999	1004										
15	997	986	972	984	993	983	973	986										
20	978	961	937	954	970	954	937	959										
25	953	928	892	918	940	917	893	927										
30	923	889	840	874	903	873	841	887										
35	888	844	781	823	861	823	783	842										
40	850	795	716	768	814	768	718	792										
45	806	741	646	709	764	709	649	738										
50	760	683	572	646	711	647	574	681										
55	709	622	494	581	655	581	497	620										
60	654	559	413	514	596	515	416	556										
65	596	493	329	446	536	448	334	491										
70	535	427	245	379	474	380	250	424										
75	472	360	163	313	412	314	169	359										
80	411	298	87.7	251	351	252	92.4	296										
85	356	243	27.6	197	296	199	30.5	241										
90	315	206	1.79	161	254	161	1.59	204										
95	285	182	2.22	142	230	142	1.90	179										
100	257	160	2.73	126	209	126	2.42	157										
105	230	141	3.19	112	188	112	2.86	138										
110	205	124	3.76	100	170	100	3.41	122										
115	182	105	4.34	90.1	153	90.3	3.97	105										
120	161	92.9	4.94	80.8	136	80.9	4.56	88.3										
125	142	75.8	5.54	72.4	121	72.5	5.14	72.1										
130	124	63.9	6.13	65.0	107	65.0	5.72	60.5										
135	108	54.1	6.68	58.4	93.0	58.4	6.28	50.9										
140	92.7	45.7	7.19	52.2	80.8	52.1	6.78	43.2										
145	78.9	38.4	7.67	46.0	69.6	45.9	7.28	36.2										
150	66.1	32.1	8.20	39.4	59.2	39.5	7.76	30.5										
155	54.6	26.6	8.62	32.8	48.9	32.8	8.16	25.6										
160	44.0	22.8	8.95	26.4	38.4	26.4	8.57	22.4										
165	33.3	18.9	9.15	20.2	27.9	20.3	8.89	18.7										
170	22.2	14.8	9.31	14.9	18.8	14.9	9.09	14.9										
175	11.6	11.6	9.41	11.3	11.0	11.1	9.29	11.7										
180	9.29	9.45	9.42	9.52	9.28	9.43	9.42	9.55										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks: