
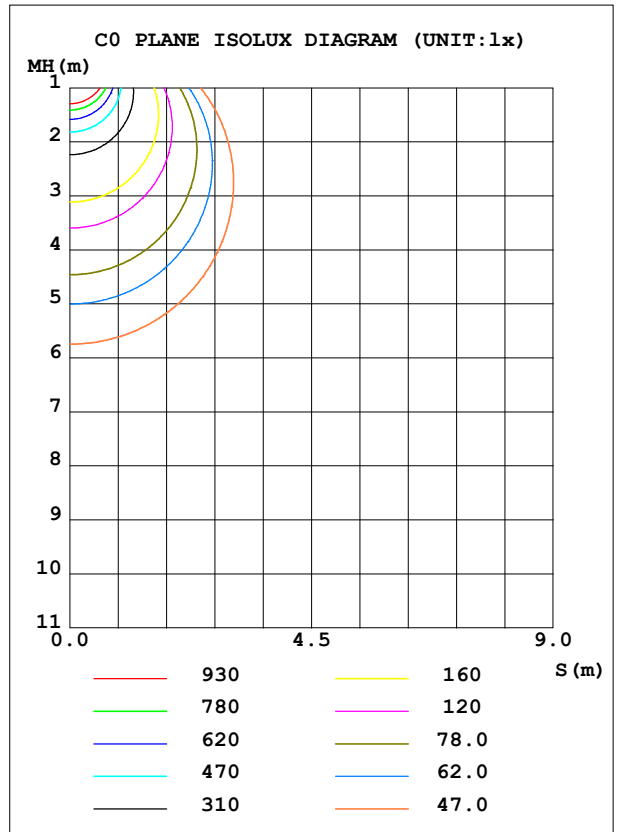


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.30V I:0.1967A P:43.912W PF:0.9288 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6011.16x1 lm		
NAME: E-B40W-E	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	E-B40W-E	Imax (cd)	1553	S/MH (C0/180)	1.35
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	6011.2	η UP, DN (C0-180)	7.0, 43.8
NOMINAL FLUX (lm)	6011.16	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	6.4, 42.9
LAMPS INSIDE	1	η up (%)	13.3	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	240	η down (%)	86.7	CIBSE SHR MAX	1.50

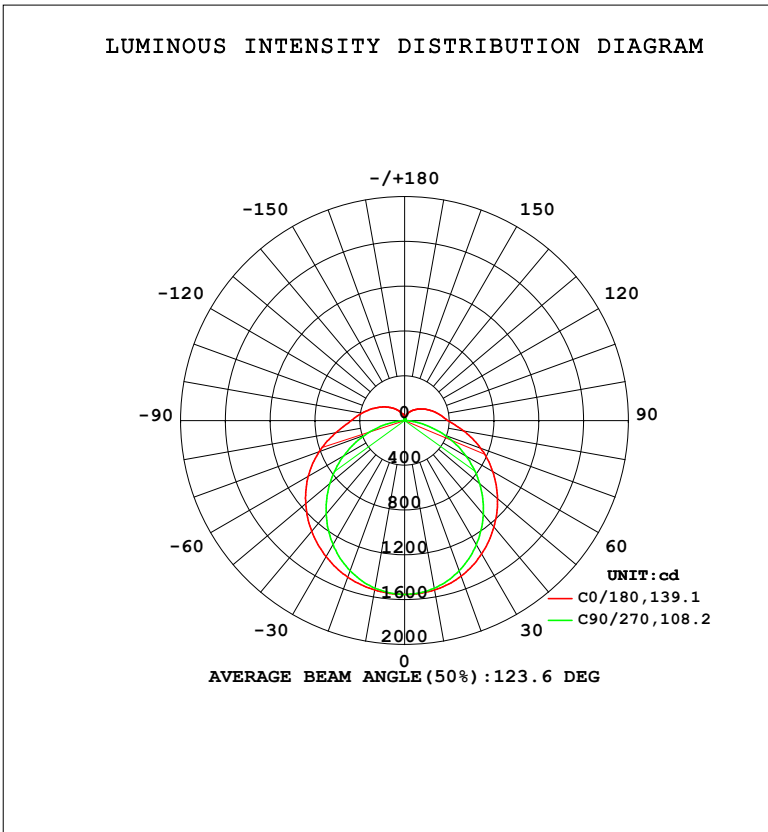

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1537	1530	1521	1529	1537	1528	1521	1529	0- 10	147.1	147.1	2.45,2.45
20	1488	1462	1427	1455	1478	1453	1427	1460	10- 20	423.2	570.3	9.49,9.49
30	1404	1352	1280	1332	1376	1330	1282	1349	20- 30	646.7	1217	20.2,20.2
40	1292	1208	1092	1172	1242	1171	1094	1205	30- 40	792.0	2009	33.4,33.4
50	1155	1039	870.9	985.7	1084	985.6	875.2	1035	40- 50	846.7	2856	47.5,47.5
60	993.6	849.9	629.1	785.0	909.8	785.6	634.8	845.5	50- 60	810.3	3666	61,61
70	812.2	648.6	373.7	578.6	723.3	580.8	382.1	644.1	60- 70	692.4	4358	72.5,72.5
80	623.3	452.4	132.6	383.2	535.3	386.0	140.8	448.9	70- 80	515.9	4874	81.1,81.1
90	478.2	312.4	2.785	245.6	388.1	246.5	2.481	308.3	80- 90	335.5	5210	86.7,86.7
100	388.9	242.3	4.192	192.4	318.6	192.7	3.721	238.4	90-100	241.8	5452	90.7,90.7
110	311.2	188.4	5.782	153.9	259.2	153.4	5.208	184.6	100-110	187.3	5639	93.8,93.8
120	244.5	140.9	7.605	123.7	207.5	123.0	6.964	133.1	110-120	139.1	5778	96.1,96.1
130	187.9	96.82	9.435	99.55	162.6	98.89	8.716	91.52	120-130	97.21	5875	97.7,97.7
140	140.1	69.46	11.05	79.79	123.4	79.44	10.32	65.25	130-140	64.49	5940	98.8,98.8
150	99.82	48.80	12.60	60.34	90.19	60.35	11.81	46.09	140-150	39.70	5979	99.5,99.5
160	66.74	34.79	13.71	40.39	58.43	40.17	13.05	34.04	150-160	21.27	6001	99.8,99.8
170	33.83	22.61	14.24	22.86	28.48	22.70	13.85	22.73	160-170	8.733	6009	100,100
180	14.17	14.40	14.40	14.59	14.14	14.39	14.37	14.63	170-180	1.788	6011	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2431.3 lm

%lum = 40.4%

%lamp = 40.4%

Conical surface Flux(120deg): 3666 lm

%lum = 61.0%


%lamp = 61.0%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.30V I:0.1967A P:43.912W PF:0.9288 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6011.16x1 lm		
NAME: E-B40W-E	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

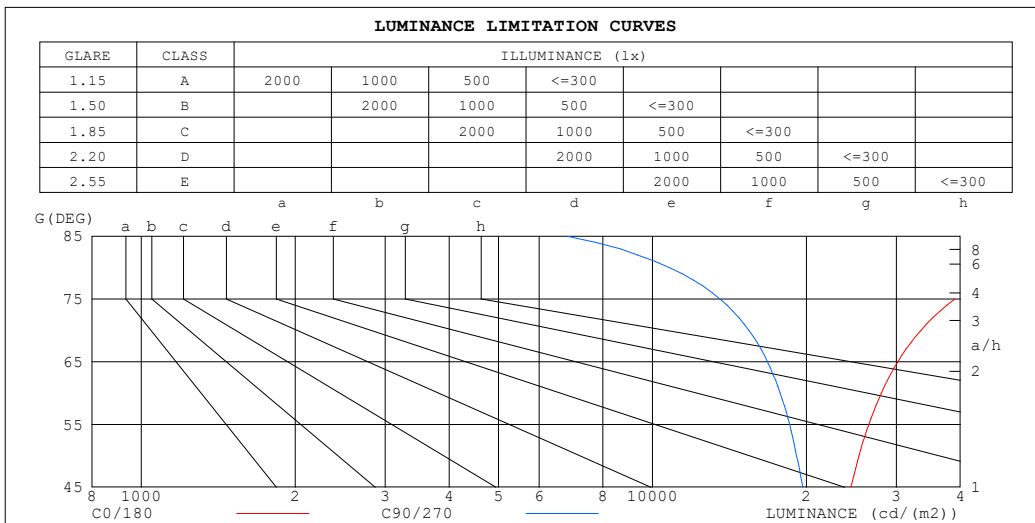

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	87309	6812
80	50644	10788
75	39083	13549
70	33506	15436
65	30210	16783
60	28040	17775
55	26499	18548
50	25349	19141
45	24462	19686


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.30V I:0.1967A P:43.912W PF:0.9288 Freq:49.99Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:6011.16x1 lm		
NAME: E-B40W-E	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.96	.96	.96	.90	.90	.90	.87
1.0	.98	.93	.89	.94	.90	.86	.88	.84	.81	.82	.79	.76	.76	.73	.71	.68
2.0	.84	.77	.71	.81	.75	.69	.76	.70	.65	.70	.66	.62	.65	.62	.58	.55
3.0	.74	.65	.58	.71	.63	.56	.66	.59	.54	.61	.56	.51	.57	.53	.49	.46
4.0	.65	.56	.48	.62	.54	.47	.58	.51	.45	.54	.48	.43	.51	.46	.41	.39
5.0	.58	.48	.41	.56	.47	.40	.52	.45	.39	.49	.42	.37	.45	.40	.36	.33
6.0	.52	.42	.36	.50	.41	.35	.47	.39	.34	.44	.37	.32	.41	.35	.31	.29
7.0	.47	.38	.31	.45	.37	.31	.42	.35	.30	.40	.33	.29	.37	.32	.27	.25
8.0	.42	.34	.28	.41	.33	.27	.39	.32	.26	.36	.30	.25	.34	.29	.24	.22
9.0	.39	.31	.25	.38	.30	.24	.36	.29	.24	.34	.27	.23	.32	.26	.22	.20
10.0	.36	.28	.22	.35	.27	.22	.33	.26	.21	.31	.25	.21	.29	.24	.20	.18

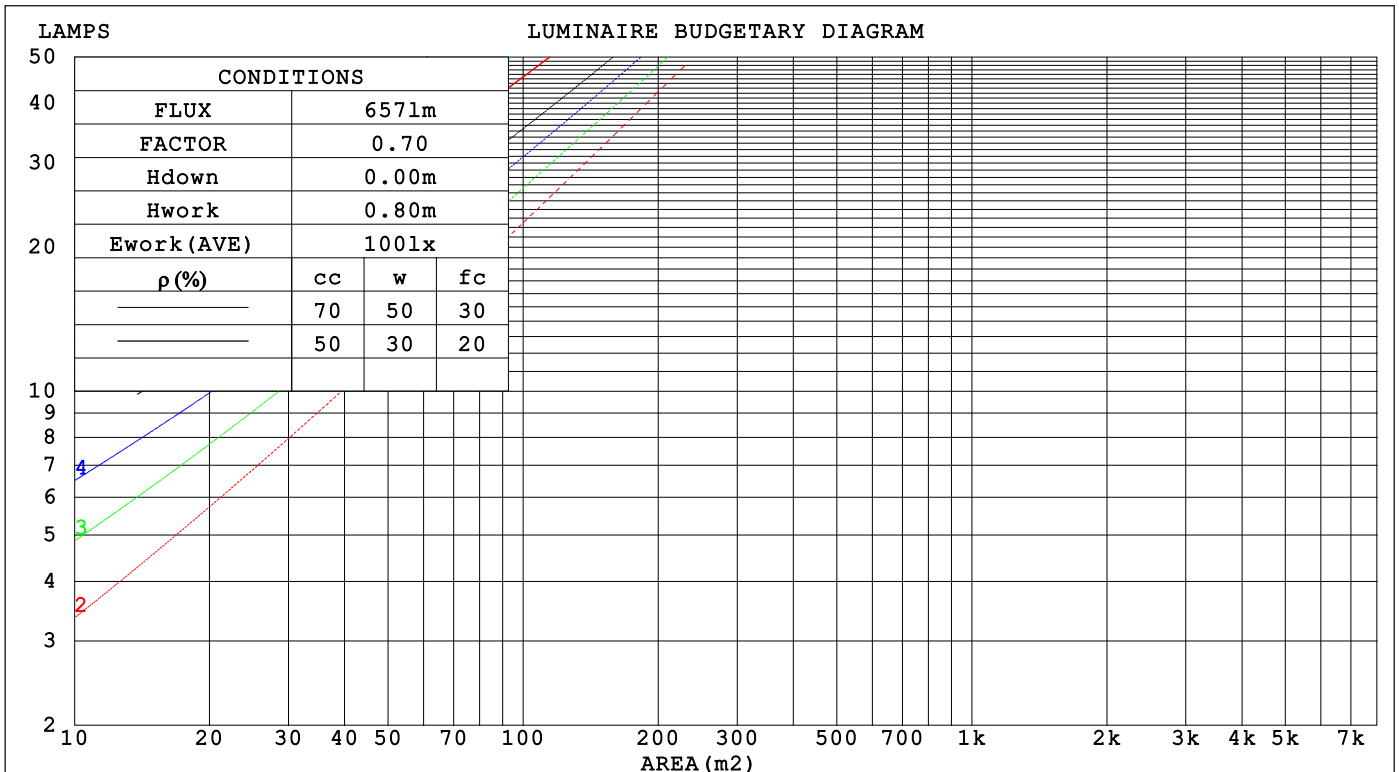

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.30V I:0.1967A P:43.912W PF:0.9288 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6011.16x1 lm		
NAME: E-B40W-E	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.359	.204	.065	.348	.199	.063	.327	.188	.060	.308	.177	.057	.290	.168	.054	
2.0	.319	.175	.054	.309	.170	.052	.290	.161	.050	.272	.153	.048	.256	.145	.046	
3.0	.287	.153	.046	.278	.149	.045	.261	.141	.043	.245	.134	.041	.230	.127	.039	
4.0	.260	.135	.040	.252	.132	.039	.237	.125	.037	.222	.119	.036	.209	.113	.035	
5.0	.238	.121	.035	.230	.118	.034	.216	.113	.033	.203	.107	.032	.191	.102	.031	
6.0	.219	.110	.031	.212	.107	.031	.199	.102	.030	.187	.097	.029	.176	.093	.028	
7.0	.202	.100	.028	.196	.098	.028	.185	.093	.027	.174	.089	.026	.164	.085	.025	
8.0	.188	.092	.026	.182	.090	.025	.172	.086	.025	.162	.082	.024	.153	.078	.023	
9.0	.176	.085	.024	.170	.083	.023	.161	.079	.023	.152	.076	.022	.143	.073	.021	
10.0	.165	.079	.022	.160	.077	.022	.151	.074	.021	.142	.071	.020	.135	.068	.019	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.292	.292	.292	.250	.250	.250	.170	.170	.170	.098	.098	.098	.031	.031	.031	
1.0	.286	.258	.233	.245	.222	.200	.167	.152	.139	.096	.088	.081	.031	.028	.026	
2.0	.279	.235	.198	.239	.202	.171	.164	.140	.119	.094	.081	.070	.030	.026	.023	
3.0	.271	.218	.176	.233	.188	.152	.160	.131	.107	.092	.076	.063	.030	.025	.021	
4.0	.264	.205	.161	.226	.177	.140	.156	.124	.098	.090	.072	.058	.029	.024	.019	
5.0	.256	.195	.151	.220	.169	.131	.151	.118	.092	.088	.069	.055	.028	.023	.018	
6.0	.249	.187	.143	.214	.162	.125	.147	.114	.088	.086	.067	.052	.028	.022	.017	
7.0	.242	.181	.138	.208	.157	.120	.144	.110	.085	.083	.065	.051	.027	.021	.017	
8.0	.235	.175	.134	.202	.152	.117	.140	.107	.083	.081	.063	.049	.026	.021	.016	
9.0	.229	.170	.130	.197	.148	.114	.137	.104	.081	.080	.061	.048	.026	.020	.016	
10.0	.223	.166	.128	.192	.144	.112	.133	.101	.079	.078	.060	.047	.025	.020	.016	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.30V I:0.1967A P:43.912W PF:0.9288 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6011.16x1 lm		
NAME: E-B40W-E	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.8	25.2	24.2	25.6	26.1	22.2	23.6	22.7	24.1	24.5
3H	26.2	27.5	26.6	27.9	28.4	23.7	25.0	24.2	25.4	25.9
4H	27.4	28.7	27.9	29.1	29.7	24.2	25.4	24.7	25.9	26.5
6H	28.8	30.0	29.3	30.5	31.0	24.6	25.7	25.1	26.2	26.8
8H	29.5	30.7	30.1	31.2	31.7	24.6	25.8	25.2	26.3	26.8
12H	30.4	31.5	30.9	32.0	32.6	24.7	25.7	25.2	26.3	26.9
4H 2H	24.3	25.6	24.8	26.1	26.6	23.2	24.4	23.7	24.9	25.4
3H	26.9	28.0	27.5	28.5	29.1	24.9	26.0	25.5	26.5	27.1
4H	28.4	29.4	28.9	29.9	30.5	25.7	26.7	26.2	27.2	27.8
6H	29.9	30.8	30.5	31.4	32.0	26.2	27.1	26.8	27.7	28.3
8H	30.8	31.6	31.4	32.2	32.9	26.4	27.2	27.0	27.8	28.5
12H	31.8	32.6	32.4	33.2	33.8	26.5	27.2	27.1	27.8	28.5
8H 4H	28.7	29.5	29.3	30.1	30.8	26.5	27.3	27.1	27.9	28.6
6H	30.5	31.2	31.1	31.8	32.5	27.4	28.1	28.0	28.7	29.4
8H	31.6	32.2	32.2	32.8	33.5	27.7	28.3	28.4	29.0	29.7
12H	32.8	33.3	33.5	34.0	34.7	28.0	28.5	28.7	29.2	30.0
12H 4H	28.7	29.5	29.3	30.1	30.8	26.7	27.5	27.3	28.1	28.8
6H	30.6	31.2	31.3	31.9	32.6	27.8	28.4	28.4	29.0	29.8
8H	31.8	32.3	32.4	33.0	33.7	28.3	28.8	29.0	29.5	30.3

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.1 / - 0.1	+ 0.1 / - 0.2
1.5H	+ 0.2 / - 0.2	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.5

CIE Pub.117, 6011 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 6.2)
 Area: 0.070821 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.30V I:0.1967A P:43.912W PF:0.9288 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6011.16x1 lm		
NAME: E-B40W-E	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	51	38	31	50	38	31	48	37	31	24
0.80	60	47	40	59	47	39	56	46	39	31
1.00	68	56	48	66	55	47	63	55	46	38
1.25	75	63	55	73	62	54	69	60	53	44
1.50	80	69	60	78	67	60	73	64	58	48
2.00	87	77	69	84	75	68	79	72	65	55
2.50	92	82	75	88	80	73	83	76	70	59
3.00	95	87	80	92	84	78	86	80	74	62
4.00	100	92	86	96	90	84	90	84	80	67
5.00	102	96	91	99	93	88	92	88	84	70
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.30V I:0.1967A P:43.912W PF:0.9288 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6011.16x1 lm		
NAME: E-B40W-E	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

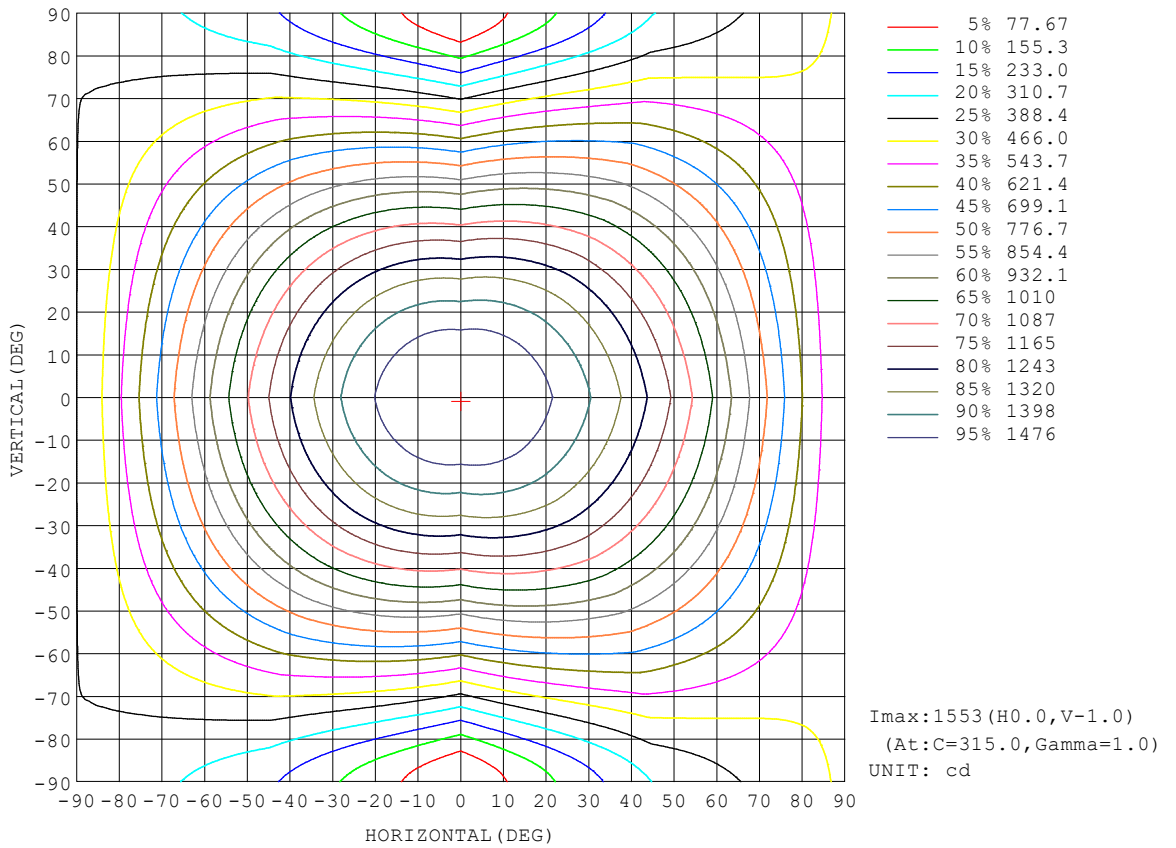


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.30V I:0.1967A P:43.912W PF:0.9288 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6011.16x1 lm		
NAME: E-B40W-E	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

Flux out:3271 lm

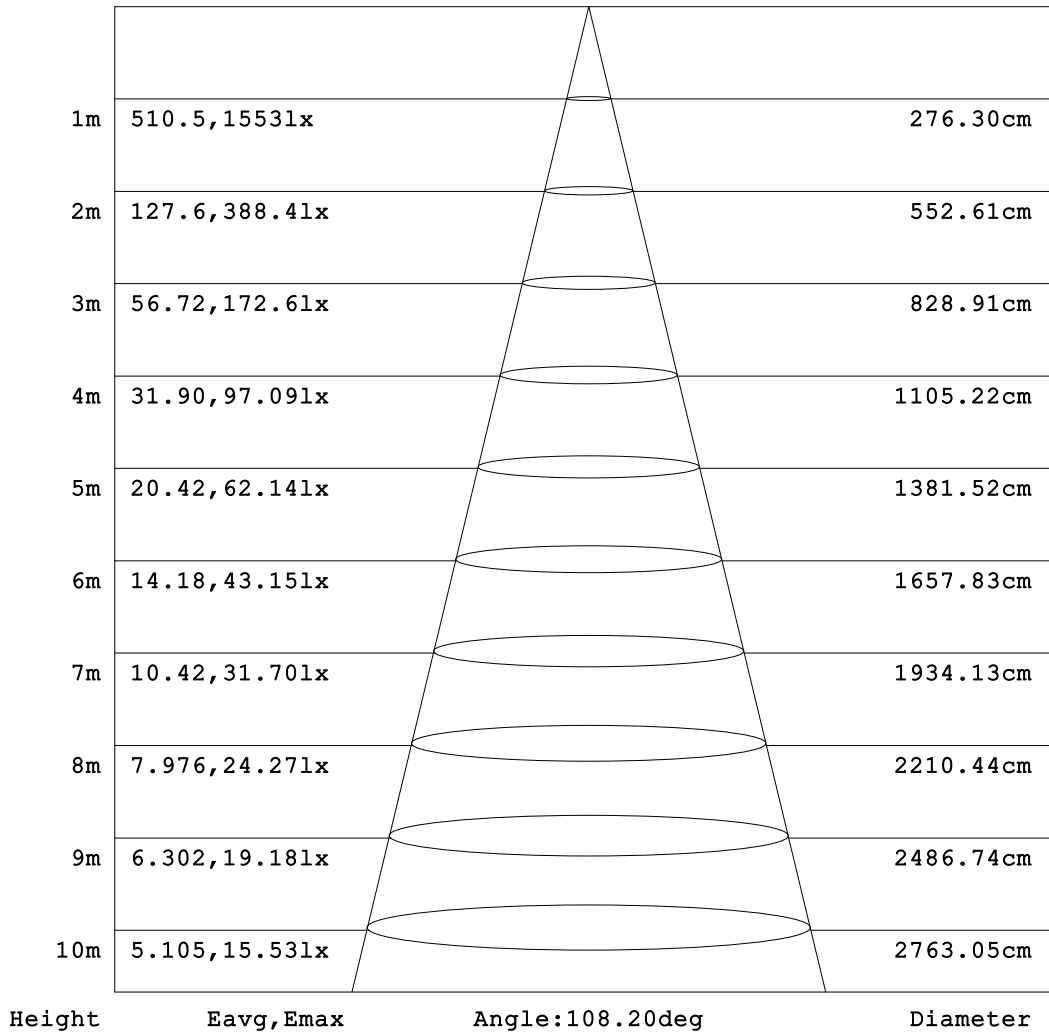


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: DAMIN
Test Date: 2023-09-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.640m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.30V I:0.1967A P:43.912W PF:0.9288 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6011.16x1 lm		
NAME: E-B40W-E	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

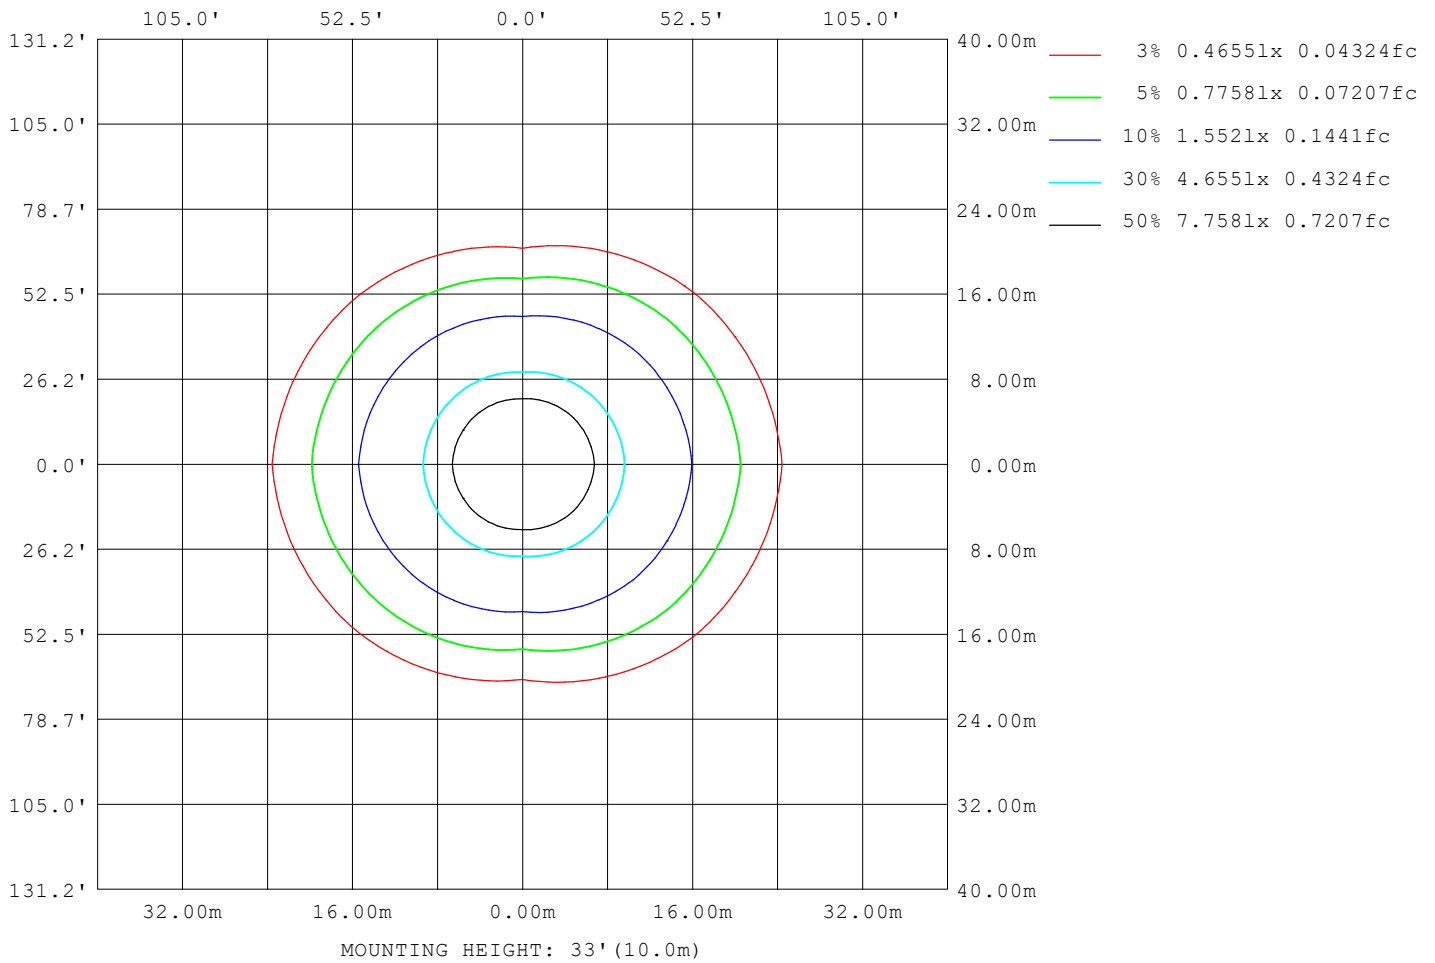

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.30V I:0.1967A P:43.912W PF:0.9288 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6011.16x1 lm		
NAME: E-B40W-E	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	28781
L_0~180 (75) av	36710
L_0~180 (85) av	80261
L_90~270 (65) av	16893
L_90~270 (75) av	13774
L_90~270 (85) av	7179
L_45 (65) av	23888
L_45 (75) av	27960
L_45 (85) av	54258

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

Planar Illuminance Curve

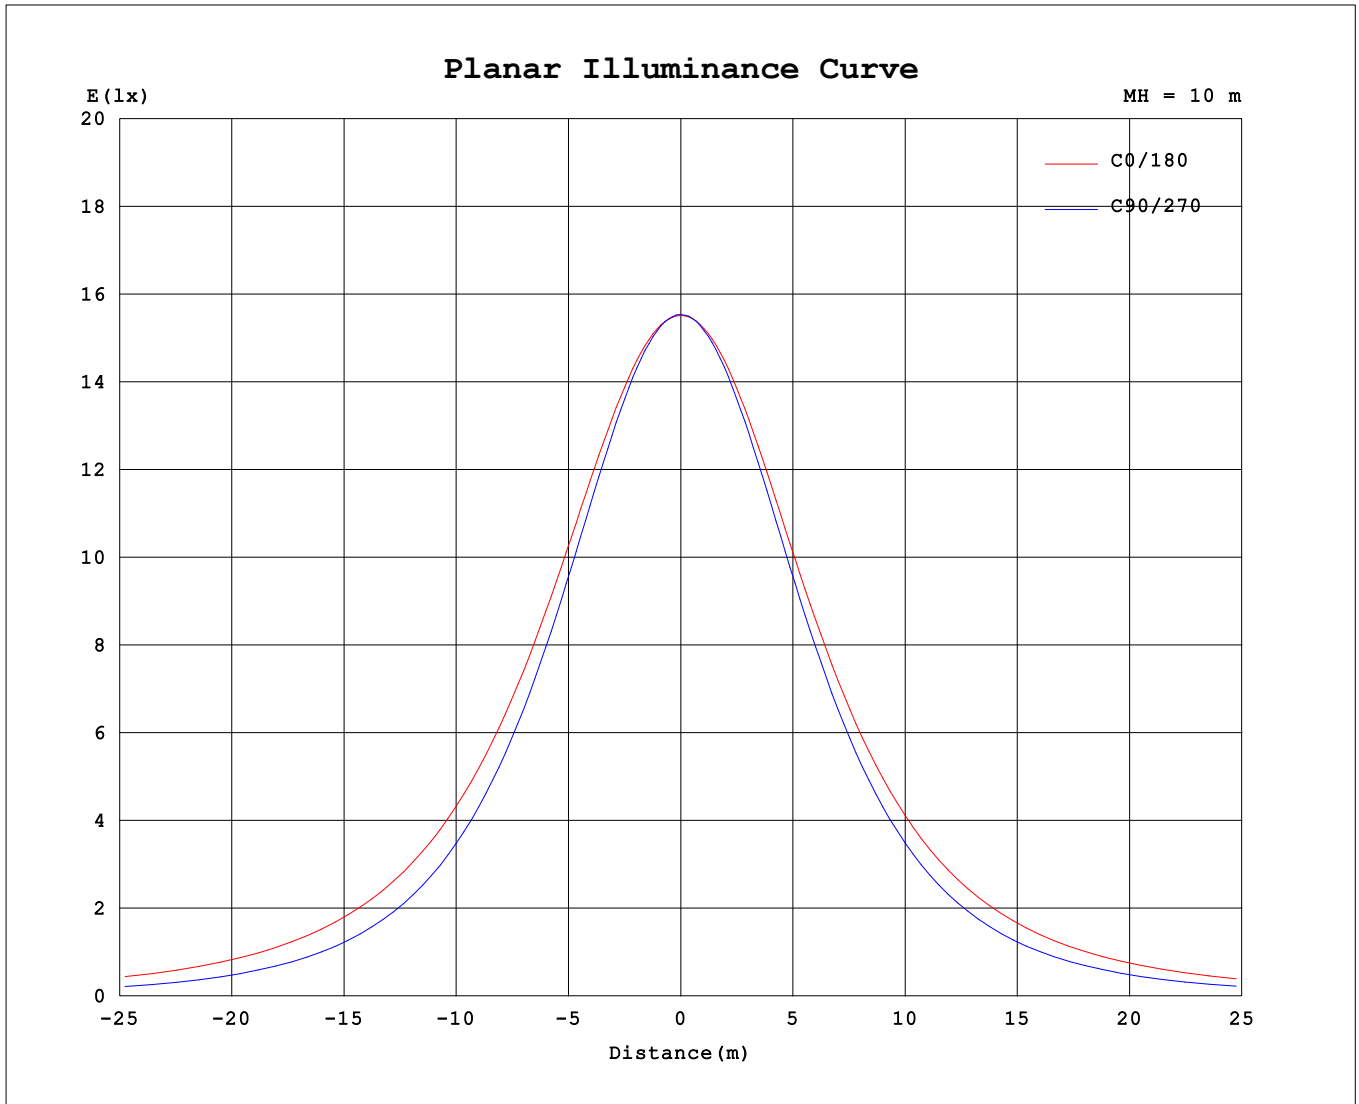

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.30V I:0.1967A P:43.912W PF:0.9288 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6011.16x1 lm		
NAME: E-B40W-E	TYPE: 40W	WEIGHT:
SPEC.: 5700K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.161*0.061	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315											
0	1553	1553	1553	1553	1553	1553	1553	1553											
5	1549	1547	1545	1547	1549	1546	1545	1547											
10	1537	1530	1521	1529	1537	1528	1521	1529											
15	1517	1501	1482	1498	1513	1497	1482	1501											
20	1488	1462	1427	1455	1478	1453	1427	1460											
25	1449	1412	1360	1399	1432	1397	1361	1410											
30	1404	1352	1280	1332	1376	1330	1282	1349											
35	1351	1285	1190	1256	1313	1255	1192	1280											
40	1292	1208	1092	1172	1242	1171	1094	1205											
45	1226	1127	985	1082	1165	1081	987	1122											
50	1155	1039	871	986	1084	986	875	1035											
55	1077	946	753	887	999	887	757	941											
60	994	850	629	785	910	786	635	845											
65	905	749	502	682	818	683	509	746											
70	812	649	374	579	723	581	382	644											
75	717	548	248	478	629	481	257	544											
80	623	452	133	383	535	386	141	449											
85	539	369	42.0	301	452	304	46.6	366											
90	478	312	2.78	246	388	246	2.48	308											
95	432	275	3.42	216	351	217	2.92	271											
100	389	242	4.19	192	319	193	3.72	238											
105	349	214	4.89	172	288	172	4.37	210											
110	311	188	5.78	154	259	153	5.21	185											
115	276	160	6.70	138	233	137	6.08	158											
120	245	141	7.60	124	208	123	6.96	133											
125	215	115	8.52	111	184	110	7.85	109											
130	188	96.8	9.43	99.6	163	98.9	8.72	91.5											
135	163	82.0	10.3	89.3	142	89.0	9.57	76.9											
140	140	69.5	11.1	79.8	123	79.4	10.3	65.3											
145	119	58.3	11.8	70.3	106	70.1	11.1	54.8											
150	99.8	48.8	12.6	60.3	90.2	60.3	11.8	46.1											
155	82.7	40.5	13.2	50.1	74.5	49.9	12.4	38.8											
160	66.7	34.8	13.7	40.4	58.4	40.2	13.0	34.0											
165	50.5	28.8	14.0	30.9	42.3	31.0	13.5	28.5											
170	33.8	22.6	14.2	22.9	28.5	22.7	13.9	22.7											
175	17.8	17.7	14.4	17.2	16.6	16.9	14.2	17.9											
180	14.2	14.4	14.4	14.6	14.1	14.4	14.4	14.6											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-09-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks: