
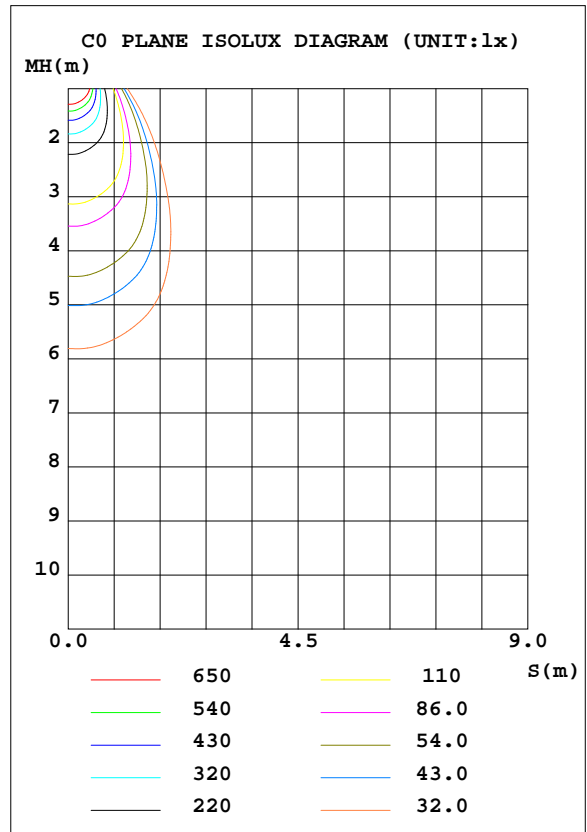


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.3V I:0.0480A P:10.30W PF:0.8940 Lamp Flux:1131.31x1 lm		
NAME: CD10W-NW-W	TYPE:10W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.:	SUR.:0.03	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 109.84 lm/W			
MODEL	CD10W-NW-W	I _{max} (cd)	1084	S/MH(C0/180)	0.94
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.90
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	1131.3	η UP, DN(C0-180)	0.0, 50.8
NOMINAL FLUX(lm)	1131.31	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 49.2
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	240.3	η down(%)	100.0	CIBSE SHR MAX	0.95

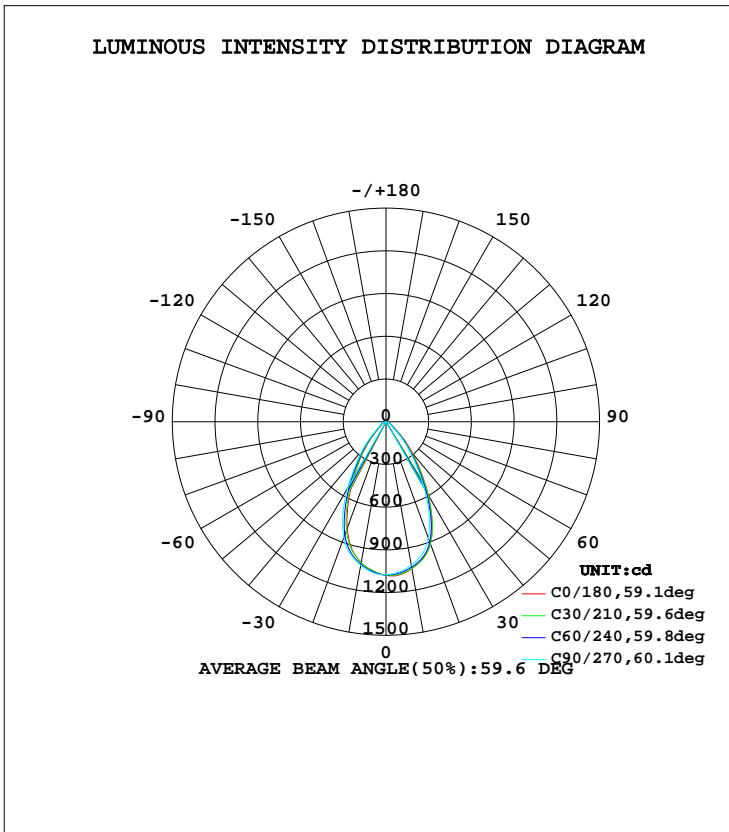

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2018-10-15

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 9.600m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	lum, lamp
10	1048	1042	1023	1010	1005	1011	1024	1028	0- 10	100.1	100.1	8.85,8.85
20	910.4	905.7	870.2	824.2	797.0	828.6	865.4	887.0	10- 20	268.6	368.7	32.6,32.6
30	593.9	578.3	539.6	481.7	461.9	490.7	539.5	576.4	20- 30	320.9	689.6	61,61
40	289.8	266.2	242.4	216.7	201.8	217.3	248.4	274.7	30- 40	232.8	922.5	81.5,81.5
50	104.1	90.35	78.07	70.14	65.22	70.79	81.92	96.66	40- 50	115.9	1038	91.8,91.8
60	45.11	42.23	39.01	36.52	34.92	36.51	39.34	43.31	50- 60	49.75	1088	96.2,96.2
70	24.55	22.62	19.86	17.47	16.02	17.44	20.13	22.83	60- 70	29.25	1117	98.8,98.8
80	7.339	6.322	4.662	3.162	2.400	3.169	4.715	6.229	70- 80	12.36	1130	99.9,99.9
90	0	0	0	0	0	0	0	0	80- 90	1.549	1131	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018-10-15

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.3V I:0.0480A P:10.30W PF:0.8940 Lamp Flux:1131.31x1 lm		
NAME: CD10W-NW-W	TYPE:10W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.:	SUR.:0.03	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.07	1.04	1.07	1.05	1.03	1.03	1.01	.99	.00	.98	.96	.96	.95	.94	.92
2.0	1.01	.96	.92	.99	.95	.91	.96	.92	.89	.93	.90	.87	.90	.87	.85	.84
3.0	.93	.87	.83	.91	.86	.82	.89	.84	.81	.86	.82	.79	.84	.81	.78	.76
4.0	.86	.80	.75	.85	.79	.74	.82	.77	.73	.80	.76	.73	.78	.75	.72	.70
5.0	.80	.73	.68	.79	.73	.68	.77	.71	.67	.75	.70	.67	.73	.69	.66	.65
6.0	.74	.67	.63	.73	.67	.63	.72	.66	.62	.70	.65	.62	.69	.65	.61	.60
7.0	.69	.63	.58	.68	.62	.58	.67	.62	.57	.66	.61	.57	.65	.60	.57	.55
8.0	.65	.58	.54	.64	.58	.54	.63	.57	.53	.62	.57	.53	.61	.56	.53	.51
9.0	.61	.54	.50	.60	.54	.50	.59	.54	.50	.58	.53	.50	.58	.53	.49	.48
10.0	.57	.51	.47	.57	.51	.47	.56	.50	.47	.55	.50	.46	.54	.50	.46	.45

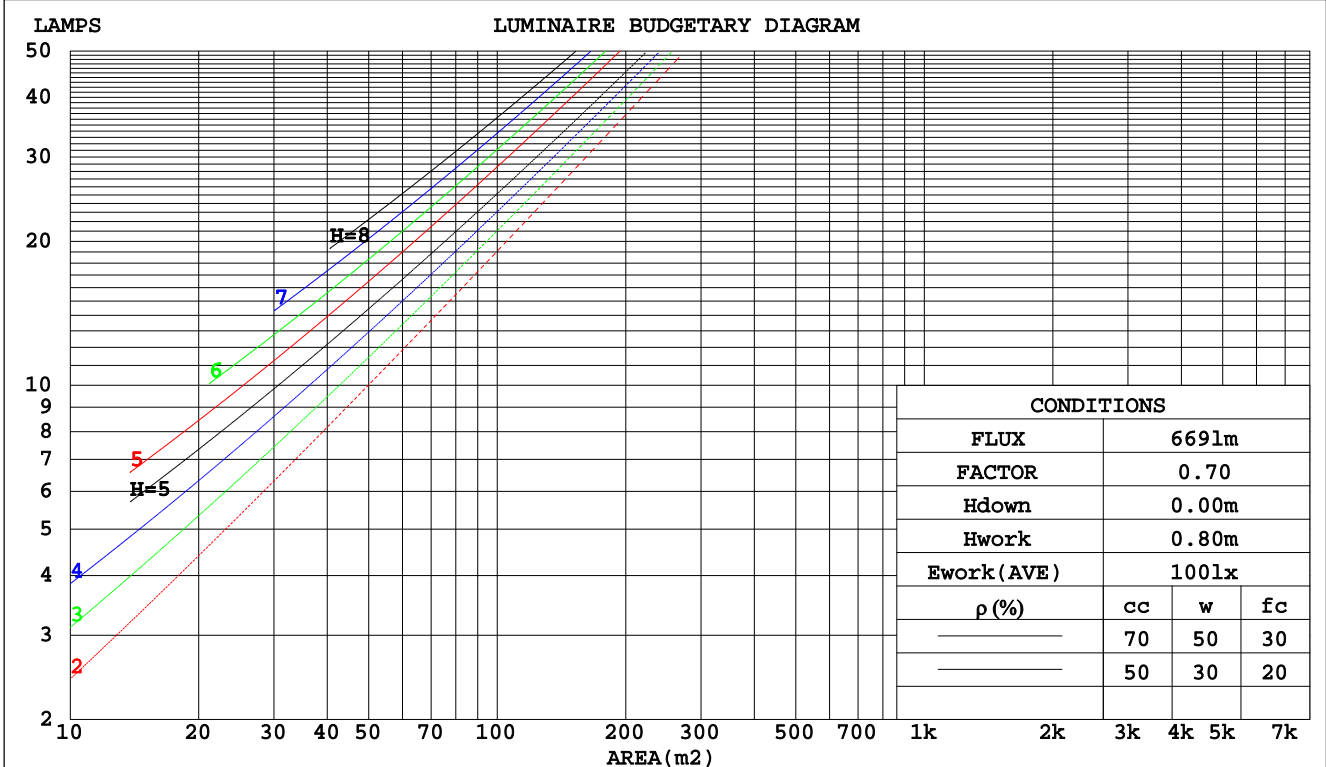

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2018-10-15

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 9.600m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.3V I:0.0480A P:10.30W PF:0.8940 Lamp Flux:1131.31x1 lm		
NAME: CD10W-NW-W	TYPE:10W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.:	SUR.:0.03	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.201	.114	.036	.194	.111	.035	.182	.104	.033	.170	.098	.031	.159	.092	.030	
2.0	.194	.106	.033	.188	.104	.032	.177	.098	.031	.167	.094	.029	.158	.089	.028	
3.0	.184	.098	.029	.179	.096	.029	.170	.092	.028	.161	.088	.027	.153	.085	.026	
4.0	.174	.091	.027	.170	.089	.026	.162	.086	.026	.155	.083	.025	.148	.080	.024	
5.0	.165	.084	.024	.162	.083	.024	.154	.080	.024	.148	.078	.023	.142	.076	.023	
6.0	.157	.079	.023	.154	.078	.022	.147	.075	.022	.141	.073	.022	.136	.072	.021	
7.0	.149	.074	.021	.146	.073	.021	.141	.071	.020	.135	.069	.020	.130	.068	.020	
8.0	.142	.069	.019	.139	.069	.019	.134	.067	.019	.130	.066	.019	.125	.064	.019	
9.0	.135	.065	.018	.133	.065	.018	.128	.063	.018	.124	.062	.018	.120	.061	.018	
10.0	.129	.062	.017	.127	.061	.017	.123	.060	.017	.119	.059	.017	.116	.058	.017	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.173	.157	.143	.148	.135	.123	.101	.093	.085	.058	.054	.049	.019	.017	.016	
2.0	.159	.132	.110	.136	.114	.095	.093	.079	.066	.054	.046	.039	.017	.015	.013	
3.0	.148	.114	.086	.127	.098	.075	.087	.068	.053	.050	.040	.031	.016	.013	.010	
4.0	.138	.099	.069	.119	.086	.060	.082	.060	.042	.047	.035	.025	.015	.011	.008	
5.0	.130	.088	.057	.112	.076	.049	.077	.053	.035	.045	.031	.021	.014	.010	.007	
6.0	.123	.079	.047	.106	.068	.041	.073	.048	.029	.042	.028	.017	.014	.009	.006	
7.0	.117	.072	.040	.100	.062	.035	.069	.043	.025	.040	.026	.015	.013	.008	.005	
8.0	.111	.065	.034	.095	.057	.030	.066	.040	.021	.038	.024	.013	.012	.008	.004	
9.0	.106	.060	.030	.091	.052	.026	.063	.037	.018	.037	.022	.011	.012	.007	.004	
10.0	.101	.056	.026	.087	.049	.023	.060	.034	.016	.035	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018-10-15

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

Uncorrected UGR Table

Test:U:240.3V I:0.0480A P:10.30W PF:0.8940 Lamp Flux:1131.31x1 lm										
NAME: CD10W-NW-W					TYPE:10W			WEIGHT:		
DIM.:					SPEC.:4000K			SERIAL No.:1		
MFR.:					SUR.:0.03			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.3	25.4	24.5	25.5	25.7	23.5	24.6	23.8	24.8	25.0
3H	24.6	25.6	24.9	25.8	26.0	23.8	24.8	24.1	25.0	25.2
4H	24.7	25.6	25.0	25.9	26.1	23.9	24.8	24.2	25.1	25.3
6H	24.8	25.6	25.1	25.9	26.1	23.9	24.8	24.2	25.0	25.3
8H	24.7	25.6	25.1	25.8	26.1	23.8	24.7	24.2	24.9	25.2
12H	24.7	25.5	25.0	25.8	26.1	23.8	24.6	24.1	24.9	25.2
4H 2H	24.3	25.2	24.6	25.4	25.7	23.6	24.5	23.9	24.7	25.0
3H	24.7	25.5	25.1	25.8	26.1	24.0	24.8	24.3	25.1	25.4
4H	24.9	25.7	25.3	26.0	26.3	24.1	24.9	24.5	25.2	25.5
6H	25.0	25.7	25.4	26.0	26.3	24.2	24.8	24.6	25.2	25.5
8H	25.0	25.6	25.4	26.0	26.3	24.2	24.8	24.6	25.1	25.5
12H	25.0	25.5	25.4	25.9	26.3	24.1	24.7	24.5	25.0	25.4
8H 4H	24.9	25.5	25.3	25.9	26.2	24.2	24.8	24.6	25.1	25.5
6H	25.0	25.5	25.5	25.9	26.3	24.2	24.7	24.7	25.1	25.5
8H	25.1	25.5	25.5	25.9	26.3	24.2	24.7	24.7	25.1	25.5
12H	25.0	25.4	25.5	25.8	26.3	24.2	24.6	24.7	25.0	25.5
12H 4H	24.9	25.4	25.3	25.8	26.2	24.1	24.7	24.5	25.0	25.4
6H	25.0	25.4	25.5	25.9	26.3	24.2	24.6	24.7	25.1	25.5
8H	25.0	25.4	25.5	25.8	26.3	24.2	24.6	24.7	25.0	25.5
Variations with the observer position at spacings:										
S = 1.0H	+ 1.4 / - 2.1					+ 1.4 / - 2.2				
1.5H	+ 2.4 / - 2.1					+ 2.3 / - 2.0				
2.0H	+ 3.3 / - 1.5					+ 2.6 / - 1.3				

CIE Pub.117 Corrected 1131 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.4)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018-10-15

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.3V I:0.0480A P:10.30W PF:0.8940 Lamp Flux:1131.31x1 lm		
NAME: CD10W-NW-W	TYPE:10W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.:	SUR.:0.03	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	80	72	68	79	72	68	79	72	68	63
0.80	88	81	77	88	81	76	86	80	76	72
1.00	94	87	83	93	87	82	91	87	82	77
1.25	99	93	88	98	92	88	96	91	87	82
1.50	102	96	92	101	96	92	98	94	91	86
2.00	106	101	97	104	100	96	101	98	95	89
2.50	108	103	100	106	102	99	103	100	97	91
3.00	110	106	103	108	104	101	105	102	99	92
4.00	112	109	106	110	107	105	106	104	102	95
5.00	114	111	109	112	109	107	107	106	104	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018-10-15

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.3V I:0.0480A P:10.30W PF:0.8940 Lamp Flux:1131.31x1 lm		
NAME: CD10W-NW-W	TYPE:10W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.:	SUR.:0.03	PROTECTION ANGLE:

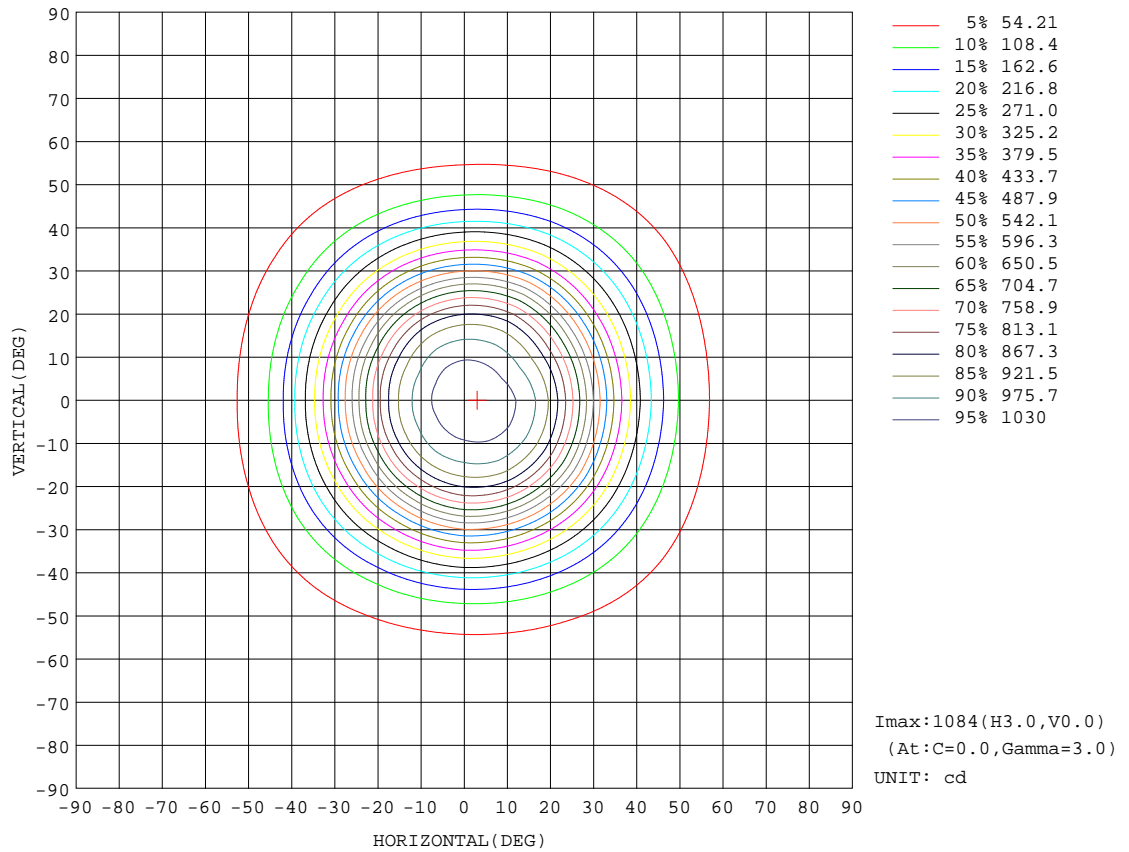


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018-10-15

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.3V I:0.0480A P:10.30W PF:0.8940 Lamp Flux:1131.3lx1 lm		
NAME: CD10W-NW-W	TYPE:10W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.:	SUR.:0.03	PROTECTION ANGLE:

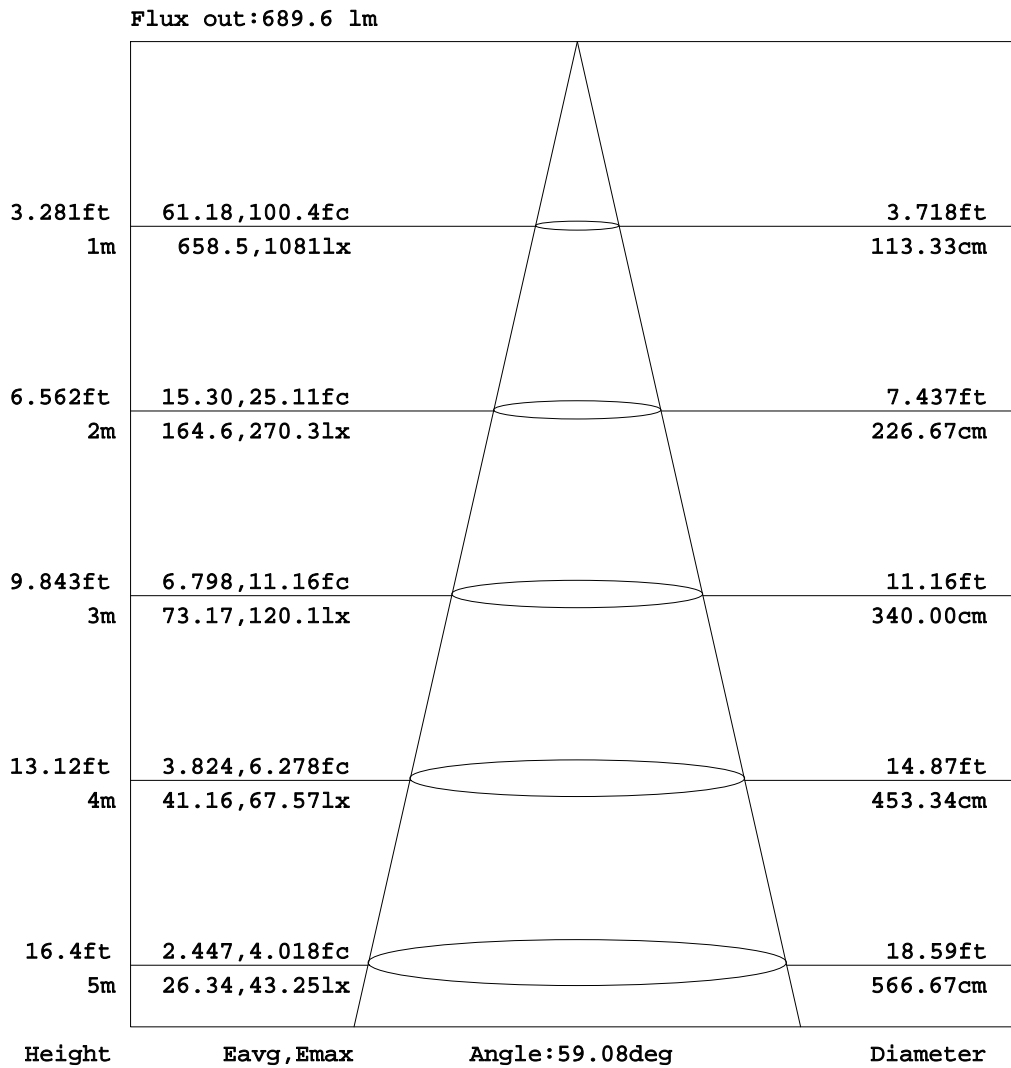


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018-10-15

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:240.3V I:0.0480A P:10.30W PF:0.8940 Lamp Flux:1131.31x1 lm		
NAME: CD10W-NW-W	TYPE:10W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.:	SUR.:0.03	PROTECTION ANGLE:

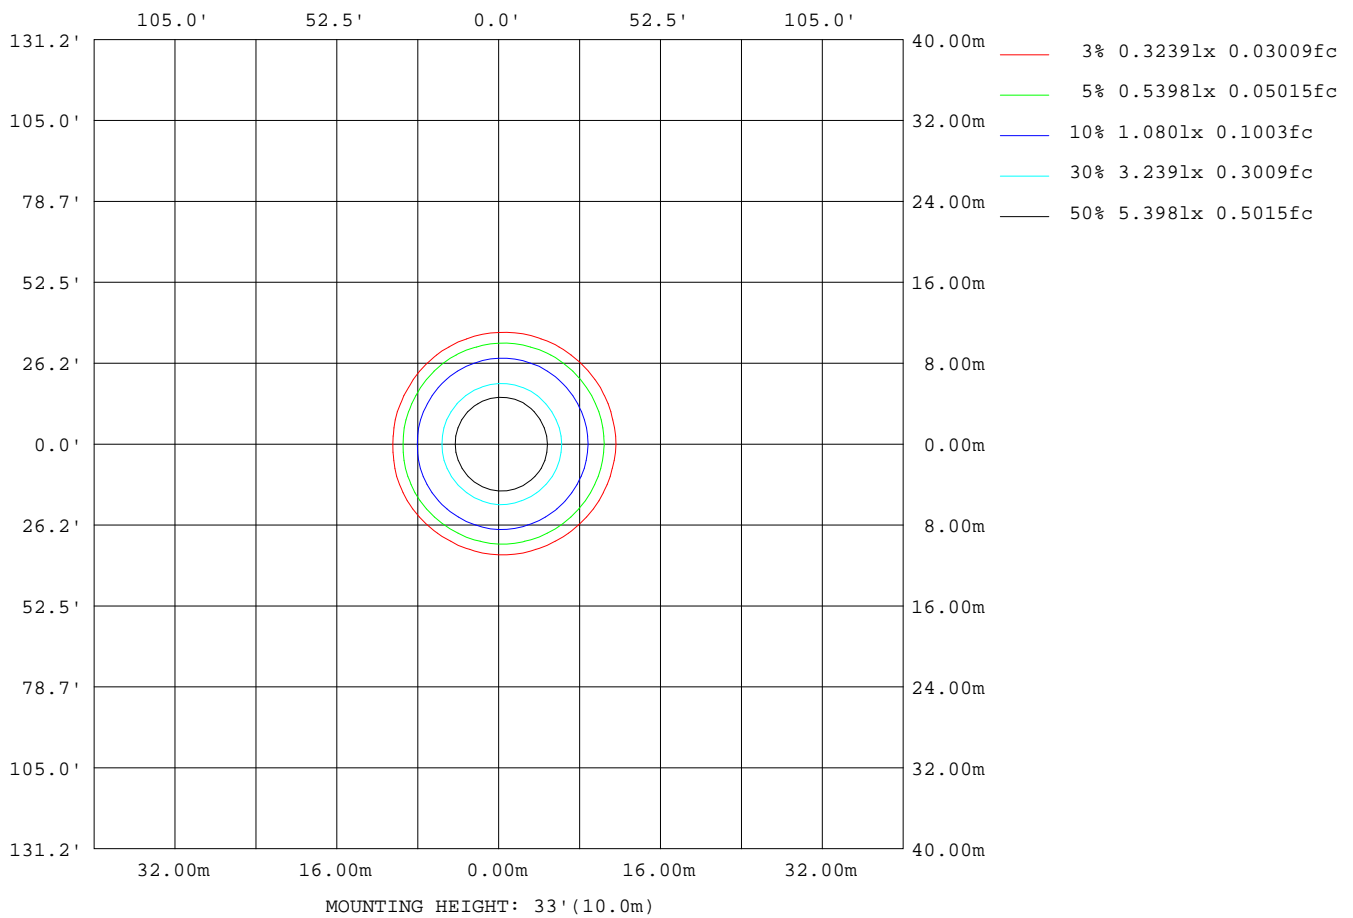

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018-10-15

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

Planar Illuminance Curve

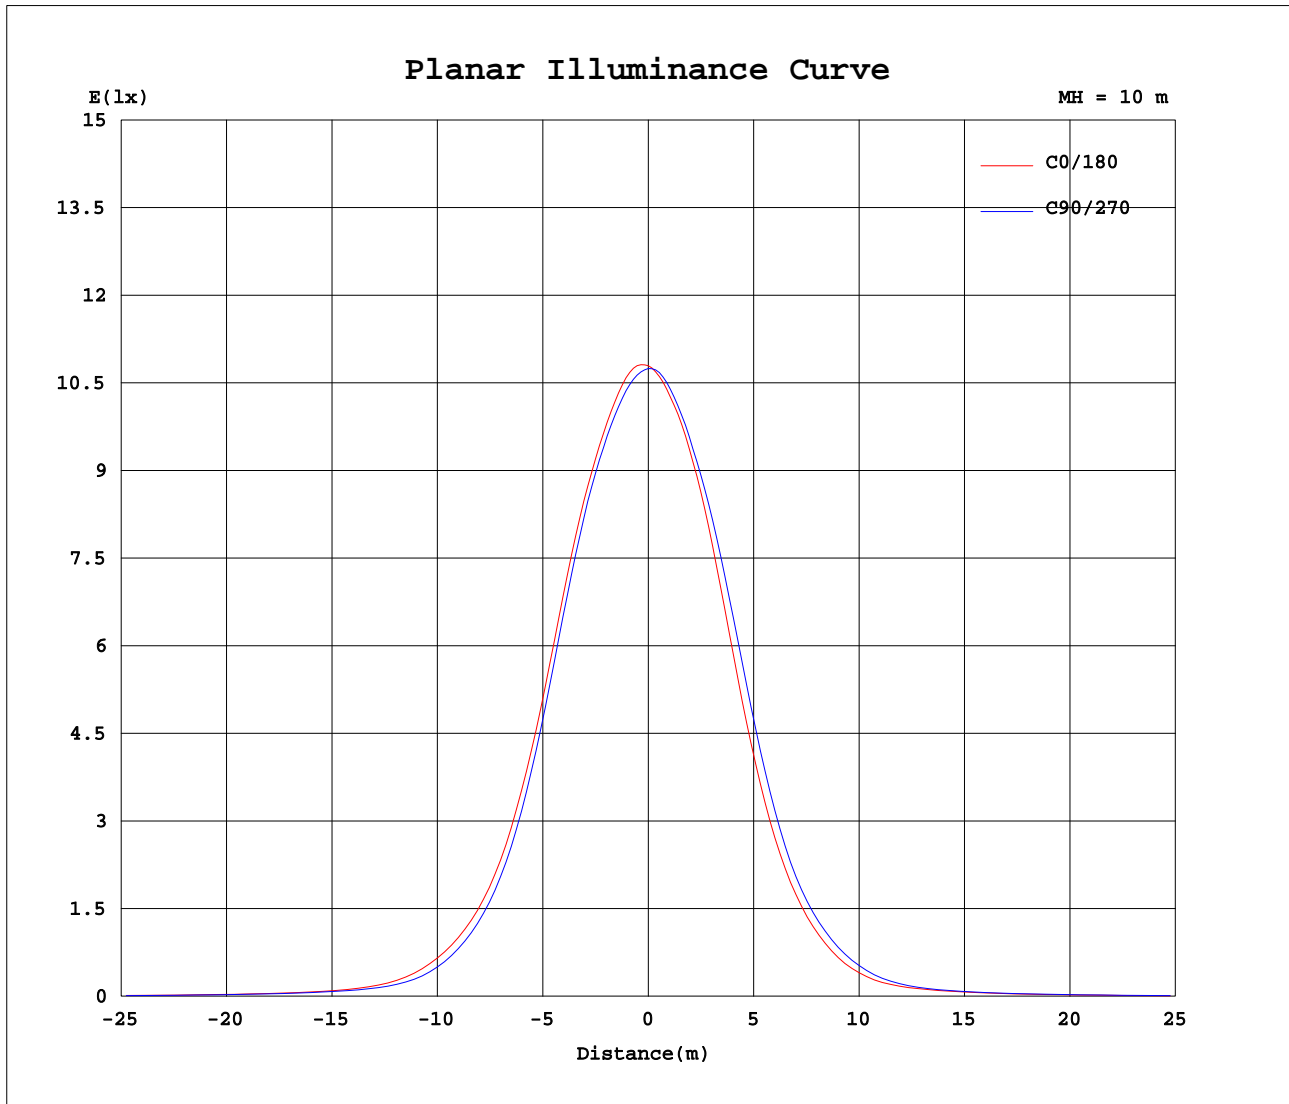

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2018-10-15

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 9.600m [K=1.0000]
 Remarks:

