
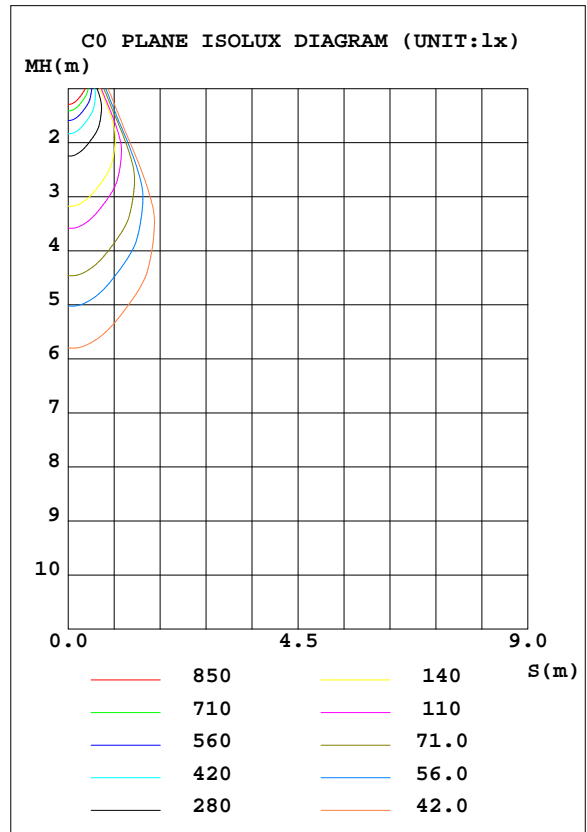


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.5V I:0.0560A P:13.00W PF:0.9670 Lamp Flux:847.371x1 lm		
NAME: DL13WCOB-AG-NW	TYPE:13W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:
MFR.:	SUR.:0.035	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 65.18 lm/W			
MODEL	DL13WCOB-AG-NW	I _{max} (cd)	1414	S/MH(C0/180)	0.77
NOMINAL POWER(W)	13	LOR(%)	100.0	S/MH(C90/270)	0.75
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	847.37	η UP, DN(C0-180)	0.0, 50.9
NOMINAL FLUX(lm)	847.371	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 49.1
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	240.5	η down(%)	100.0	CIBSE SHR MAX	0.75

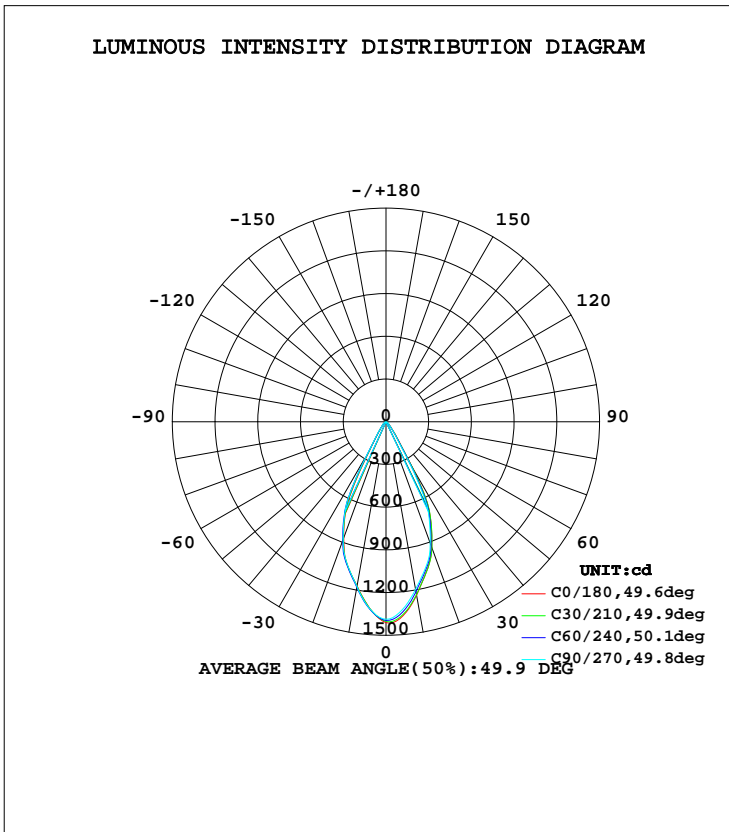

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2018-02-04

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 9.600m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	1237	1223	1196	1161	1171	1177	1176	1184	0- 10	122.0	122.0	14.4,14.4
20	941.4	933.9	908.4	873.3	870.3	882.3	881.1	894.9	10- 20	294.5	416.5	49.2,49.2
30	374.0	358.6	312.4	250.5	223.7	254.8	266.4	308.4	20- 30	293.9	710.4	83.8,83.8
40	64.27	56.33	55.17	54.33	53.35	53.80	56.54	62.32	30- 40	77.72	788.1	93,93
50	27.57	23.51	24.70	26.57	26.53	25.22	26.46	29.01	40- 50	29.27	817.4	96.5,96.5
60	13.16	10.93	11.80	13.39	13.27	12.17	12.81	14.26	50- 60	16.97	834.3	98.5,98.5
70	5.857	4.864	5.435	6.104	5.940	5.380	5.754	6.473	60- 70	8.967	843.3	99.5,99.5
80	1.568	1.265	1.346	1.487	1.415	1.320	1.479	1.719	70- 80	3.490	846.8	99.9,99.9
90	0.0618	0.0371	0.0433	0.0433	0.0557	0.0433	0.0618	0.0526	80- 90	0.5654	847.4	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018-02-04

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.5V I:0.0560A P:13.00W PF:0.9670 Lamp Flux:847.37lx1 lm		
NAME: DL13WCOB-AG-NW	TYPE:13W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:
MFR.:	SUR.:0.035	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.92	.90	.88
3.0	.98	.93	.89	.96	.92	.88	.94	.90	.87	.91	.88	.86	.89	.87	.84	.83
4.0	.92	.87	.83	.91	.86	.82	.89	.85	.81	.87	.83	.80	.85	.82	.80	.78
5.0	.87	.81	.77	.86	.81	.77	.84	.80	.76	.82	.79	.76	.81	.78	.75	.74
6.0	.82	.77	.73	.81	.76	.72	.80	.75	.72	.79	.75	.71	.77	.74	.71	.70
7.0	.78	.72	.69	.77	.72	.68	.76	.71	.68	.75	.71	.68	.74	.70	.67	.66
8.0	.74	.69	.65	.74	.68	.65	.72	.68	.64	.71	.67	.64	.71	.67	.64	.63
9.0	.71	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.61	.68	.64	.61	.60
10.0	.67	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.58	.65	.61	.58	.57

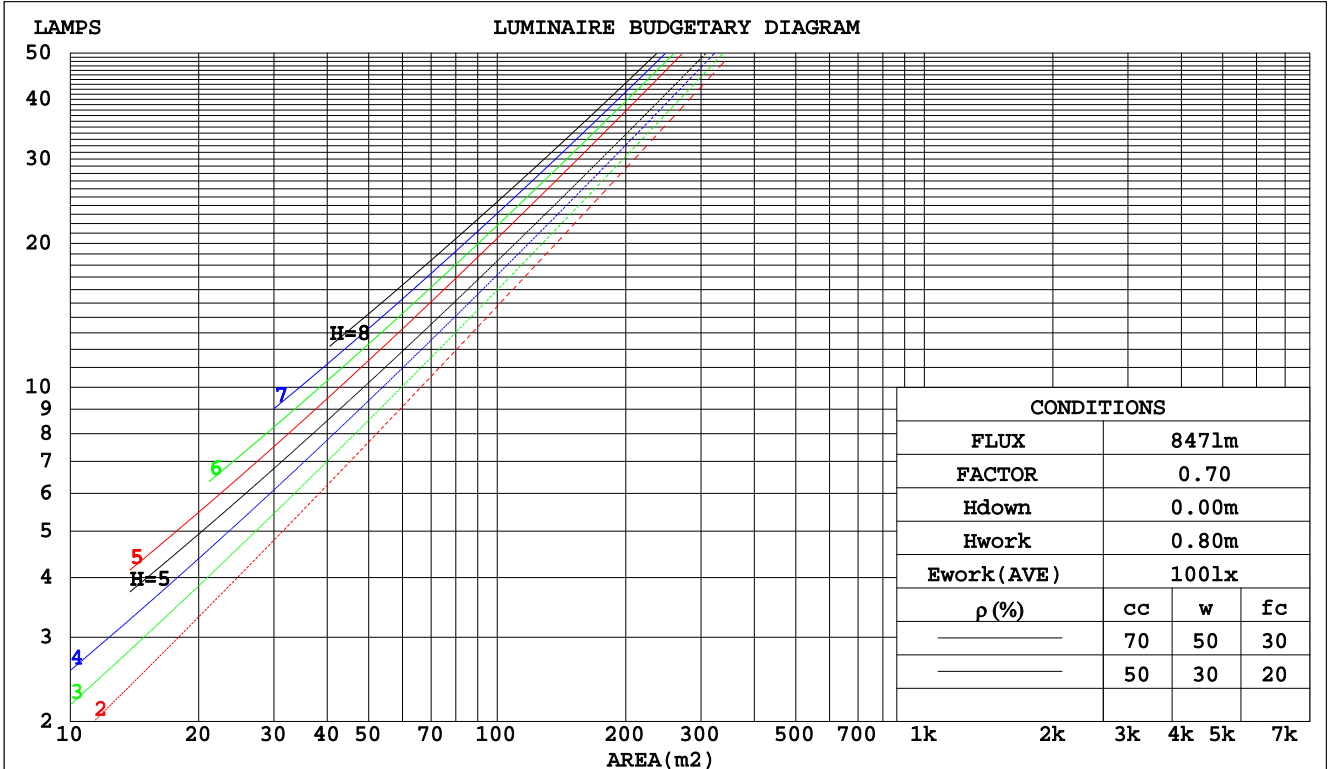

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018-02-04

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.5V I:0.0560A P:13.00W PF:0.9670 Lamp Flux:847.371x1 lm								
NAME: DL13WCOB-AG-NW			TYPE:13W			WEIGHT:		
DIM.:			SPEC.:4000K			SERIAL No.:		
MFR.:			SUR.:0.035			PROTECTION ANGLE:		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.171	.097	.031	.164	.094	.030	.151	.087	.028	.140	.081	.026	.129	.075	.024	
2.0	.162	.089	.027	.156	.086	.027	.146	.081	.025	.136	.076	.024	.127	.072	.023	
3.0	.153	.082	.024	.148	.079	.024	.140	.076	.023	.131	.072	.022	.124	.068	.021	
4.0	.145	.075	.022	.141	.074	.022	.133	.071	.021	.126	.068	.020	.120	.065	.020	
5.0	.138	.070	.020	.134	.069	.020	.127	.066	.020	.121	.064	.019	.116	.062	.019	
6.0	.131	.066	.019	.128	.065	.019	.122	.063	.018	.117	.061	.018	.112	.059	.017	
7.0	.125	.062	.018	.122	.061	.017	.117	.059	.017	.112	.058	.017	.108	.056	.016	
8.0	.119	.058	.016	.117	.058	.016	.112	.056	.016	.108	.055	.016	.104	.053	.016	
9.0	.114	.055	.015	.112	.055	.015	.108	.053	.015	.104	.052	.015	.101	.051	.015	
10.0	.110	.053	.015	.108	.052	.015	.104	.051	.014	.101	.050	.014	.097	.049	.014	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.087	.057	.054	.050	.018	.017	.016	
2.0	.155	.133	.114	.133	.114	.098	.091	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.142	.114	.091	.122	.098	.079	.084	.068	.055	.048	.040	.033	.016	.013	.011	
4.0	.131	.099	.074	.113	.085	.064	.077	.059	.045	.045	.035	.027	.014	.011	.009	
5.0	.122	.087	.061	.105	.075	.053	.072	.053	.037	.042	.031	.022	.013	.010	.007	
6.0	.114	.077	.051	.098	.067	.044	.068	.047	.031	.039	.028	.019	.013	.009	.006	
7.0	.108	.070	.043	.092	.060	.038	.064	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.102	.063	.037	.087	.055	.032	.061	.039	.023	.035	.023	.014	.011	.007	.005	
9.0	.096	.058	.032	.083	.050	.028	.058	.035	.020	.034	.021	.012	.011	.007	.004	
10.0	.092	.054	.028	.079	.047	.025	.055	.033	.018	.032	.019	.010	.010	.006	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018-02-04

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

Uncorrected UGR Table

Test:U:240.5V I:0.0560A P:13.00W PF:0.9670 Lamp Flux:847.371x1 lm										
NAME: DL13WCOB-AG-NW					TYPE:13W			WEIGHT:		
DIM.:					SPEC.:4000K			SERIAL No.:		
MFR.:					SUR.:0.035			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.7	16.6	15.9	16.8	16.9	15.1	16.0	15.3	16.1	16.3
3H	15.9	16.7	16.2	16.9	17.1	15.3	16.1	15.6	16.3	16.5
4H	16.0	16.7	16.2	16.9	17.2	15.4	16.1	15.6	16.3	16.6
6H	15.9	16.7	16.2	16.9	17.1	15.3	16.1	15.6	16.3	16.5
8H	15.9	16.6	16.2	16.9	17.1	15.3	16.0	15.6	16.3	16.5
12H	15.9	16.5	16.2	16.8	17.1	15.3	15.9	15.6	16.2	16.5
4H 2H	15.7	16.4	15.9	16.7	16.9	15.1	15.9	15.4	16.1	16.3
3H	15.9	16.6	16.3	16.9	17.2	15.4	16.1	15.7	16.3	16.6
4H	16.0	16.6	16.4	16.9	17.2	15.5	16.1	15.8	16.4	16.7
6H	16.0	16.6	16.4	16.9	17.2	15.5	16.0	15.9	16.3	16.7
8H	16.0	16.5	16.4	16.9	17.2	15.5	15.9	15.8	16.3	16.7
12H	16.0	16.4	16.4	16.8	17.2	15.4	15.9	15.8	16.2	16.6
8H 4H	15.9	16.4	16.3	16.8	17.2	15.4	15.9	15.8	16.3	16.6
6H	16.0	16.4	16.4	16.8	17.2	15.4	15.8	15.9	16.2	16.7
8H	16.0	16.3	16.4	16.7	17.2	15.4	15.8	15.9	16.2	16.6
12H	15.9	16.2	16.4	16.7	17.2	15.4	15.7	15.9	16.1	16.6
12H 4H	15.9	16.4	16.3	16.7	17.1	15.4	15.8	15.8	16.2	16.6
6H	15.9	16.3	16.4	16.7	17.2	15.4	15.8	15.8	16.2	16.6
8H	15.9	16.2	16.4	16.7	17.1	15.4	15.7	15.8	16.1	16.6
Variations with the observer position at spacings:										
S = 1.0H	+ 1.9 / - 1.8					+ 1.6 / - 1.7				
1.5H	+ 3.1 / - 1.5					+ 2.7 / - 1.3				
2.0H	+ 2.3 / - 1.9					+ 1.9 / - 1.7				

CIE Pub.117 Corrected 847.4 lm Total Lamp Luminous Flux. (8log(F/F0) = -0.6)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018-02-04

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.5V I:0.0560A P:13.00W PF:0.9670 Lamp Flux:847.37lx1 lm		
NAME: DL13WCOB-AG-NW	TYPE:13W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:
MFR.:	SUR.:0.035	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	81	77	87	81	77	86	80	77	73
0.80	95	89	85	94	88	85	93	88	84	81
1.00	99	93	90	98	93	89	97	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	104	100	97	102	99	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	103	100	95
3.00	112	108	105	110	107	104	107	104	102	96
4.00	114	111	109	112	109	107	108	106	105	98
5.00	115	113	111	113	111	109	109	107	106	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018-02-04

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.5V I:0.0560A P:13.00W PF:0.9670 Lamp Flux:847.371x1 lm		
NAME: DL13WCOB-AG-NW	TYPE:13W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:
MFR.:	SUR.:0.035	PROTECTION ANGLE:

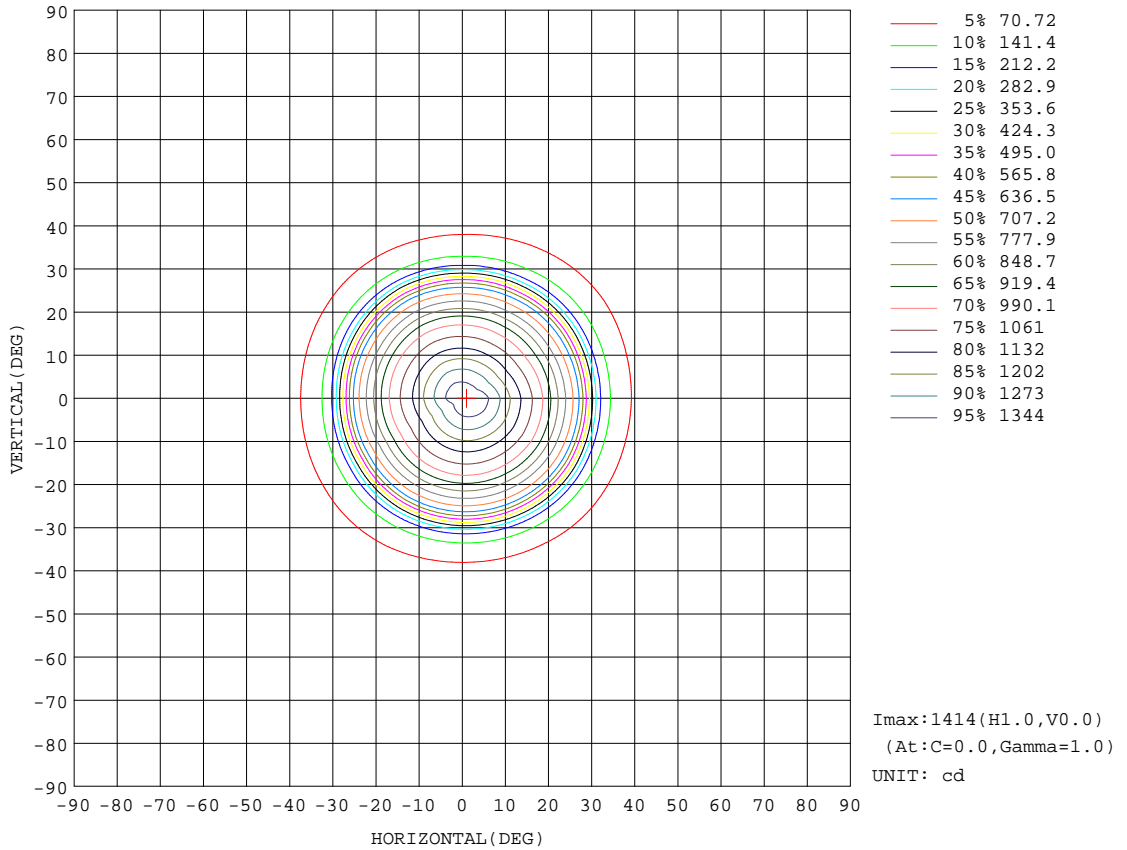


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018-02-04

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.5V I:0.0560A P:13.00W PF:0.9670 Lamp Flux:847.37lx1 lm		
NAME: DL13WCOB-AG-NW	TYPE:13W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:
MFR.:	SUR.:0.035	PROTECTION ANGLE:

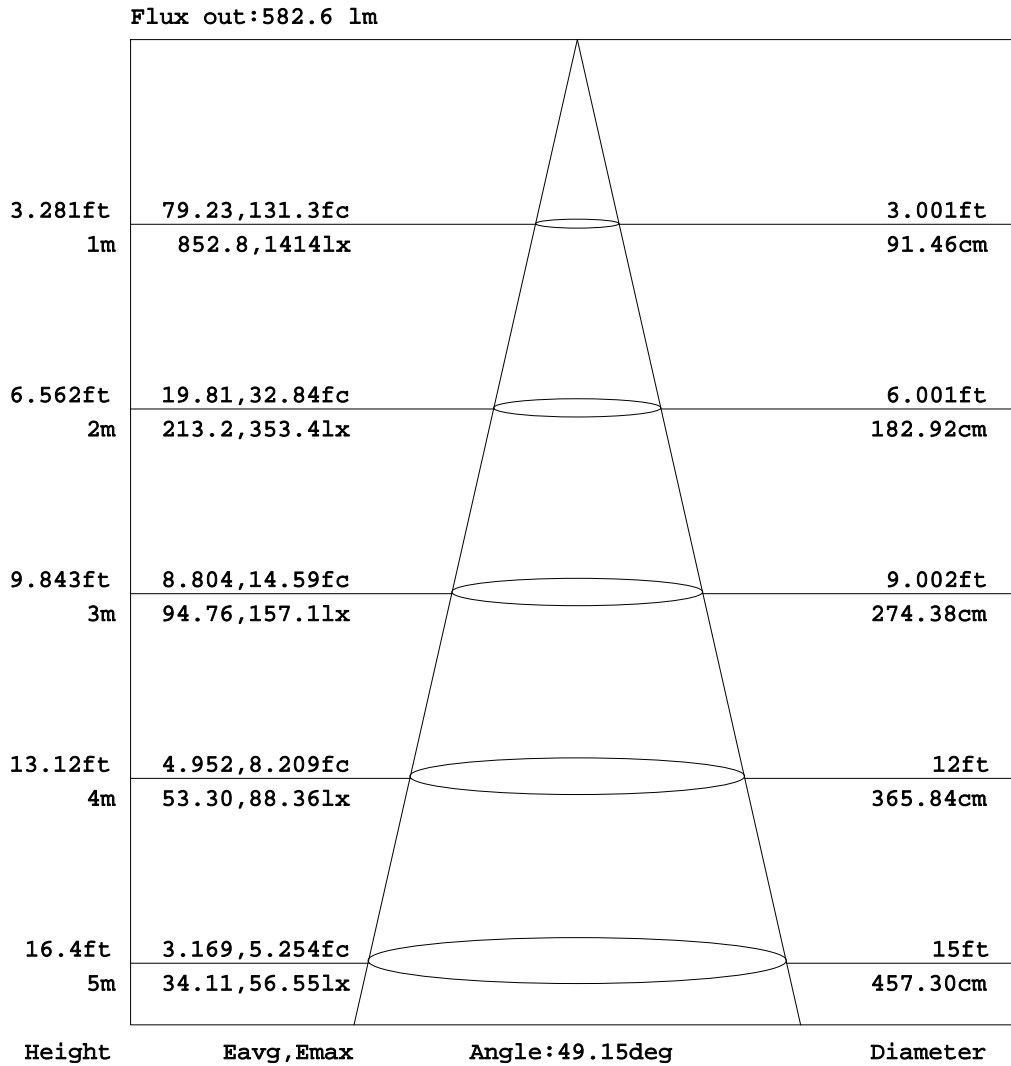


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018-02-04

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:240.5V I:0.0560A P:13.00W PF:0.9670 Lamp Flux:847.37lx1 lm		
NAME: DL13WCOB-AG-NW	TYPE:13W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:
MFR.:	SUR.:0.035	PROTECTION ANGLE:

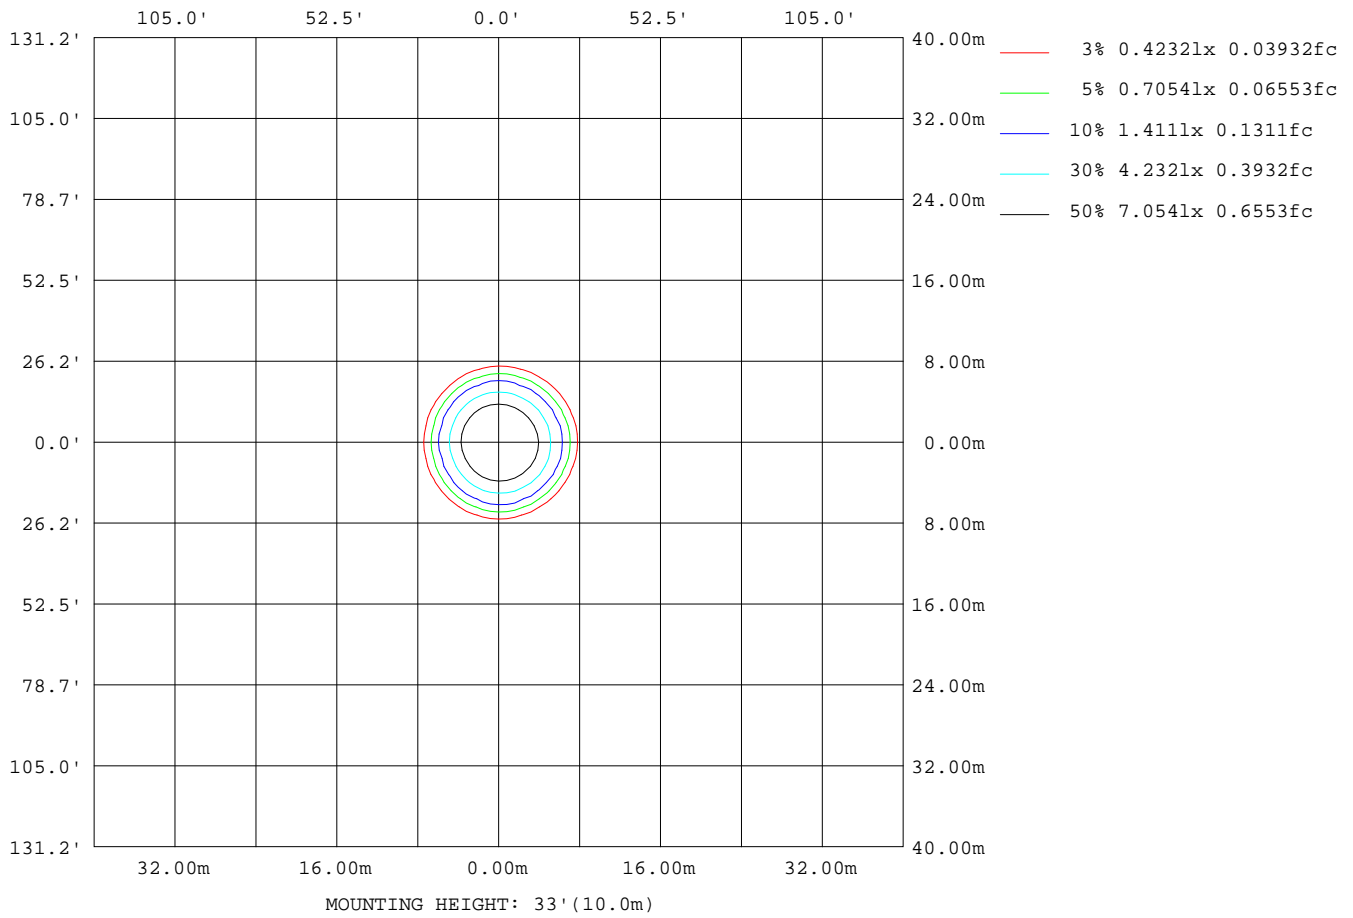

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018-02-04

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

Planar Illuminance Curve

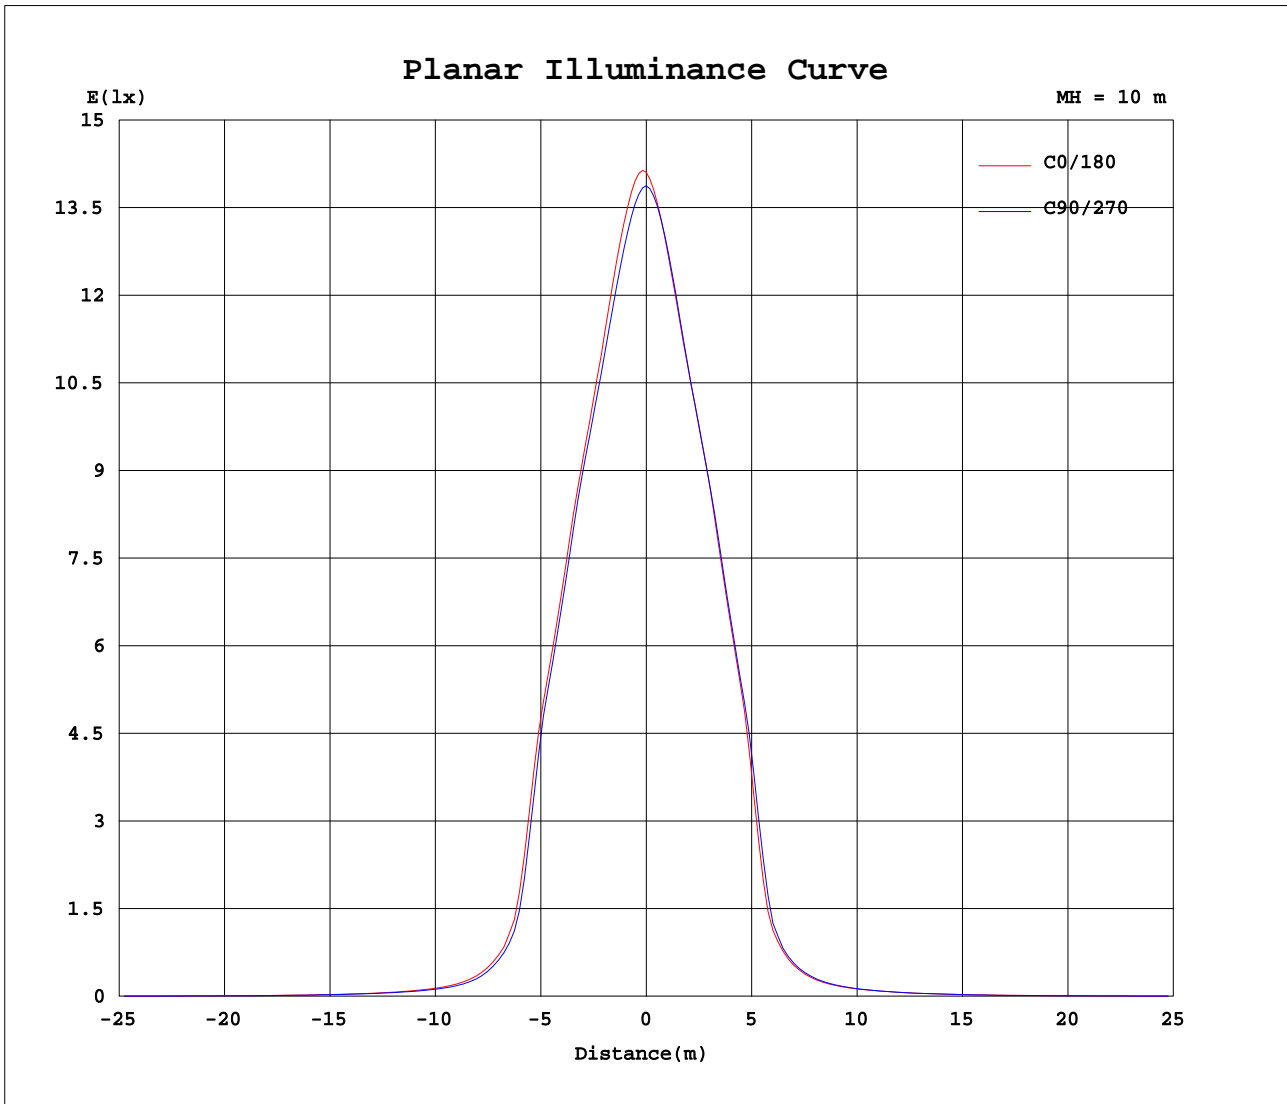

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2018-02-04

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 9.600m [K=1.0000]
 Remarks:

