
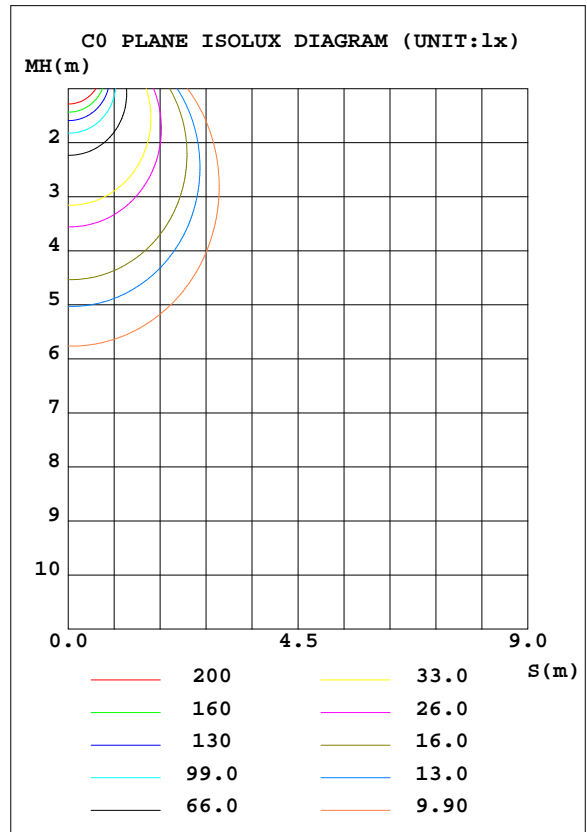


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.8V I:0.0560A P:12.60W PF:0.9370 Lamp Flux:1105.13x1 lm		
NAME: LED-B12W-NW	TYPE:12W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.:	SUR.:0.0198	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 87.71 lm/W			
MODEL	LED-B12W-NW	I _{max} (cd)	347.7	S/MH(C0/180)	1.32
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.50
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	1105.1	η UP, DN(C0-180)	0.0, 61.7
NOMINAL FLUX(lm)	1105.13	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 38.3
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	240.7	η down(%)	100.0	CIBSE SHR MAX	1.35

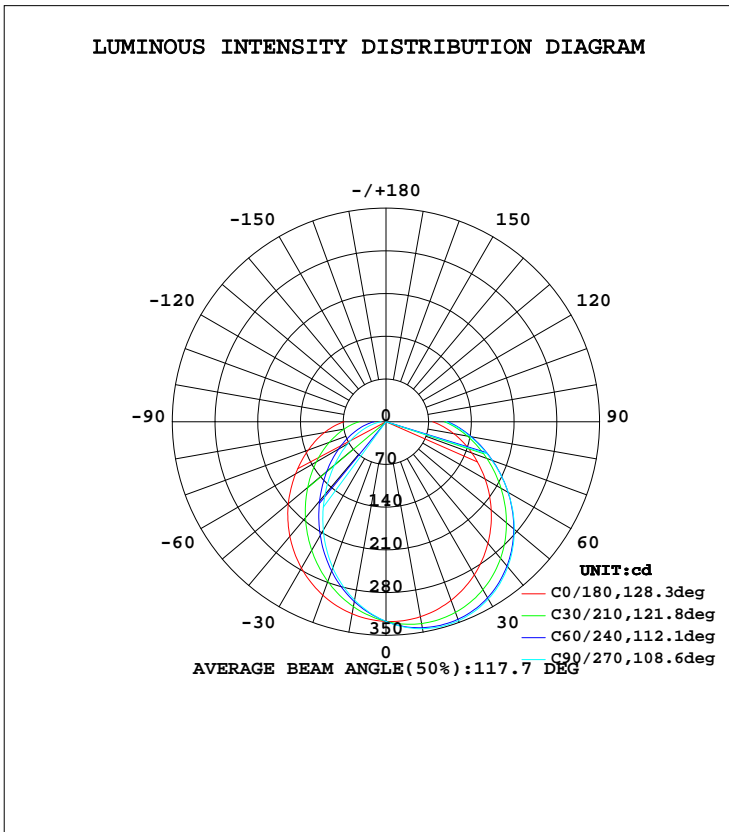

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-6

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.700m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	lum, lamp
10	324.5	339.2	344.3	335.6	319.7	303.5	296.7	306.7	0- 10	30.95	30.95	2.8,2.8
20	311.6	338.5	347.1	331.5	302.5	269.6	254.8	275.9	10- 20	88.59	119.5	10.8,10.8
30	289.5	325.3	335.4	314.9	277.0	229.4	205.5	237.4	20- 30	134.3	253.9	23,23
40	259.9	300.3	310.5	287.2	245.1	187.4	155.4	195.6	30- 40	163.0	416.9	37.7,37.7
50	225.2	265.5	274.4	250.7	209.0	147.1	110.3	154.9	40- 50	172.9	589.8	53.4,53.4
60	187.6	224.3	231.0	208.9	171.2	110.8	72.58	118.4	50- 60	165.7	755.5	68.4,68.4
70	149.7	180.8	185.0	167.1	135.6	79.18	42.73	87.55	60- 70	145.5	901.0	81.5,81.5
80	112.8	138.7	140.3	127.2	102.5	53.08	20.55	61.80	70- 80	117.7	1019	92.2,92.2
90	76.60	98.42	98.44	88.90	68.78	31.96	8.123	38.53	80- 90	86.44	1105	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-6

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.700m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.8V I:0.0560A P:12.60W PF:0.9370 Lamp Flux:1105.13x1 lm		
NAME: LED-B12W-NW	TYPE:12W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.:	SUR.:0.0198	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	.00	.94	.89	.97	.92	.88	.93	.89	.85	.89	.85	.82	.85	.82	.80	.77
2.0	.85	.77	.71	.83	.76	.70	.80	.73	.68	.76	.71	.66	.73	.69	.65	.62
3.0	.74	.65	.58	.73	.64	.57	.69	.62	.56	.67	.60	.55	.64	.59	.54	.52
4.0	.65	.56	.48	.64	.55	.48	.61	.53	.47	.59	.52	.46	.57	.51	.46	.43
5.0	.58	.48	.41	.57	.48	.41	.55	.47	.40	.53	.46	.40	.51	.45	.39	.37
6.0	.52	.43	.36	.51	.42	.36	.49	.41	.35	.48	.40	.35	.46	.40	.35	.32
7.0	.47	.38	.31	.46	.38	.31	.45	.37	.31	.43	.36	.31	.42	.35	.31	.28
8.0	.43	.34	.28	.42	.34	.28	.41	.33	.28	.40	.33	.27	.38	.32	.27	.25
9.0	.39	.31	.25	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.29	.25	.23
10.0	.36	.28	.23	.36	.28	.23	.35	.28	.23	.34	.27	.22	.33	.27	.22	.20

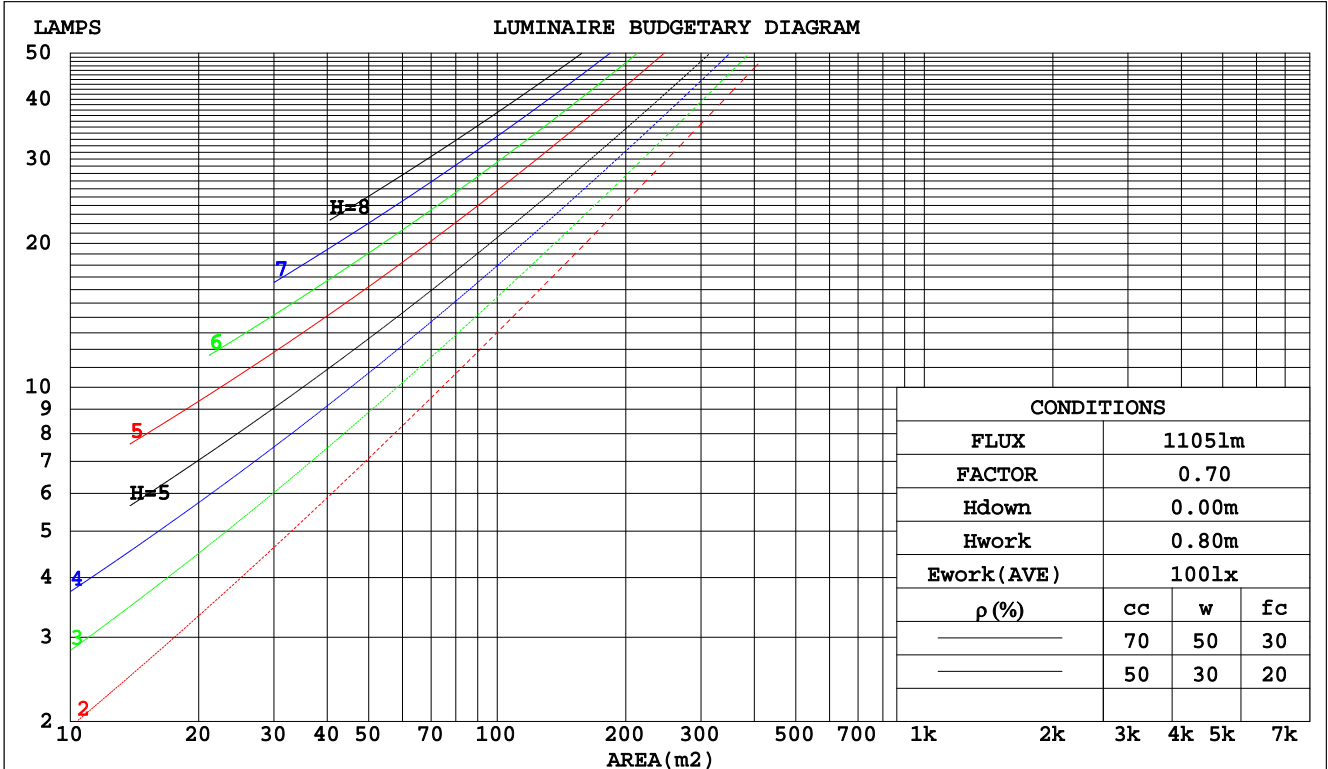

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-6

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.700m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.8V I:0.0560A P:12.60W PF:0.9370 Lamp Flux:1105.13x1 lm		
NAME: LED-B12W-NW	TYPE:12W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.:	SUR.:0.0198	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.392	.223	.071	.385	.220	.070	.371	.213	.068	.359	.207	.066	.347	.201	.065	
2.0	.341	.187	.057	.334	.184	.057	.322	.179	.056	.311	.174	.055	.301	.170	.054	
3.0	.303	.161	.048	.297	.159	.048	.287	.155	.047	.277	.152	.047	.268	.148	.046	
4.0	.273	.142	.042	.268	.140	.041	.258	.137	.041	.250	.134	.040	.241	.131	.040	
5.0	.248	.126	.037	.244	.125	.036	.235	.123	.036	.227	.120	.036	.220	.118	.035	
6.0	.227	.114	.033	.223	.113	.032	.216	.111	.032	.209	.109	.032	.202	.107	.032	
7.0	.210	.104	.029	.206	.103	.029	.200	.101	.029	.193	.099	.029	.187	.097	.029	
8.0	.194	.095	.027	.191	.094	.027	.185	.093	.026	.180	.091	.026	.175	.090	.026	
9.0	.181	.088	.024	.178	.087	.024	.173	.086	.024	.168	.084	.024	.163	.083	.024	
10.0	.170	.081	.023	.167	.081	.023	.162	.080	.022	.158	.078	.022	.154	.077	.022	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.186	.155	.128	.159	.133	.110	.109	.092	.076	.063	.053	.044	.020	.017	.014	
2.0	.179	.132	.092	.153	.113	.080	.105	.078	.056	.061	.046	.033	.019	.015	.011	
3.0	.171	.115	.070	.146	.099	.060	.101	.069	.042	.058	.040	.025	.019	.013	.008	
4.0	.163	.102	.055	.140	.088	.048	.096	.061	.034	.056	.036	.020	.018	.012	.007	
5.0	.155	.091	.045	.133	.079	.039	.091	.055	.027	.053	.032	.016	.017	.011	.005	
6.0	.147	.083	.037	.126	.072	.032	.087	.050	.023	.051	.030	.014	.016	.010	.004	
7.0	.140	.076	.032	.120	.066	.028	.083	.046	.020	.048	.027	.012	.016	.009	.004	
8.0	.133	.070	.028	.114	.061	.024	.079	.043	.017	.046	.025	.010	.015	.008	.003	
9.0	.126	.065	.024	.109	.057	.021	.075	.040	.015	.044	.024	.009	.014	.008	.003	
10.0	.120	.061	.022	.103	.053	.019	.072	.037	.013	.042	.022	.008	.014	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-6

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.700m [K=1.0000]
 Remarks:

Uncorrected UGR Table

Test:U:240.8V I:0.0560A P:12.60W PF:0.9370 Lamp Flux:1105.13x1 lm										
NAME: LED-B12W-NW					TYPE:12W			WEIGHT:		
DIM.:					SPEC.:4000K			SERIAL No.:1		
MFR.:					SUR.:0.0198			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.8	25.5	24.1	25.7	25.9	24.6	26.2	24.9	26.4	26.7
3H	26.0	27.6	26.3	27.8	28.0	26.9	28.4	27.2	28.7	28.9
4H	27.2	28.6	27.5	28.9	29.2	28.1	29.6	28.5	29.9	30.1
6H	28.4	29.8	28.8	30.1	30.4	29.4	30.8	29.8	31.1	31.4
8H	29.1	30.4	29.4	30.7	31.0	30.2	31.5	30.5	31.8	32.1
12H	29.8	31.1	30.2	31.4	31.7	31.0	32.3	31.3	32.6	32.9
4H 2H	24.8	26.3	25.2	26.6	26.8	25.4	26.8	25.7	27.1	27.4
3H	27.3	28.6	27.6	28.9	29.2	27.9	29.2	28.3	29.5	29.9
4H	28.6	29.8	29.0	30.1	30.5	29.3	30.5	29.7	30.9	31.2
6H	30.0	31.1	30.4	31.5	31.8	30.9	31.9	31.3	32.3	32.7
8H	30.8	31.8	31.2	32.2	32.6	31.7	32.7	32.1	33.1	33.5
12H	31.6	32.6	32.0	33.0	33.4	32.6	33.6	33.1	34.0	34.4
8H 4H	29.3	30.3	29.7	30.7	31.1	29.9	30.9	30.3	31.3	31.7
6H	31.0	31.9	31.5	32.3	32.8	31.7	32.6	32.2	33.0	33.4
8H	32.0	32.8	32.5	33.2	33.7	32.7	33.5	33.2	34.0	34.4
12H	33.1	33.8	33.5	34.2	34.7	33.9	34.6	34.4	35.0	35.5
12H 4H	29.5	30.4	29.9	30.8	31.2	30.0	31.0	30.5	31.4	31.8
6H	31.3	32.1	31.8	32.6	33.0	32.0	32.7	32.4	33.2	33.6
8H	32.4	33.1	32.9	33.6	34.1	33.1	33.8	33.6	34.2	34.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.4					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 1105 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.3)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-6

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.700m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.8V I:0.0560A P:12.60W PF:0.9370 Lamp Flux:1105.13x1 lm		
NAME: LED-B12W-NW	TYPE:12W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.:	SUR.:0.0198	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	54	42	34	53	41	34	52	41	34	27
0.80	63	51	43	62	50	43	60	50	42	35
1.00	71	59	51	70	59	51	68	60	50	43
1.25	78	67	58	77	66	58	74	64	57	49
1.50	83	72	64	82	71	64	78	69	62	54
2.00	90	80	73	88	79	72	85	77	70	62
2.50	95	85	78	92	84	77	88	81	75	66
3.00	98	90	83	96	88	82	92	85	80	71
4.00	103	96	90	100	94	88	96	90	86	76
5.00	105	99	94	103	97	93	98	94	90	80
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-6

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.700m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.8V I:0.0560A P:12.60W PF:0.9370 Lamp Flux:1105.13x1 lm		
NAME: LED-B12W-NW	TYPE:12W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.:	SUR.:0.0198	PROTECTION ANGLE:

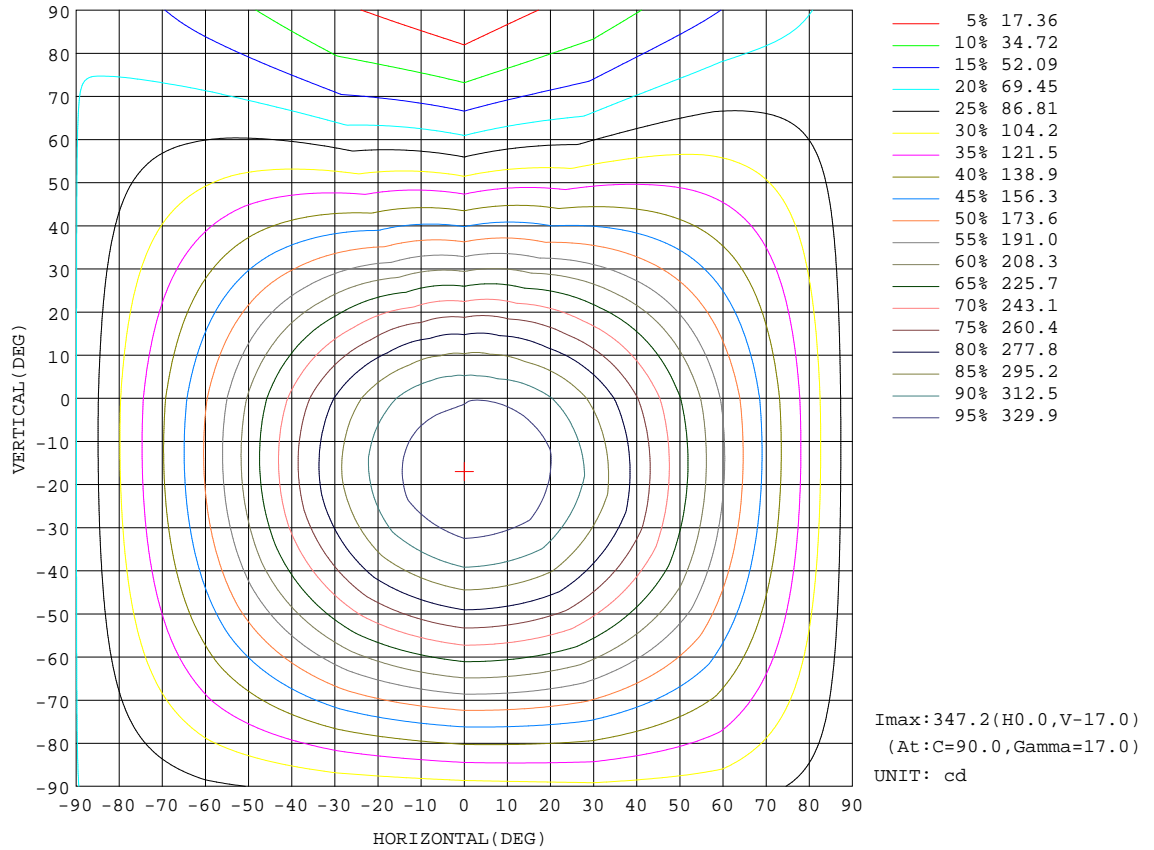


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2017-6

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 9.700m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.8V I:0.0560A P:12.60W PF:0.9370 Lamp Flux:1105.13x1 lm		
NAME: LED-B12W-NW	TYPE:12W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.:	SUR.:0.0198	PROTECTION ANGLE:

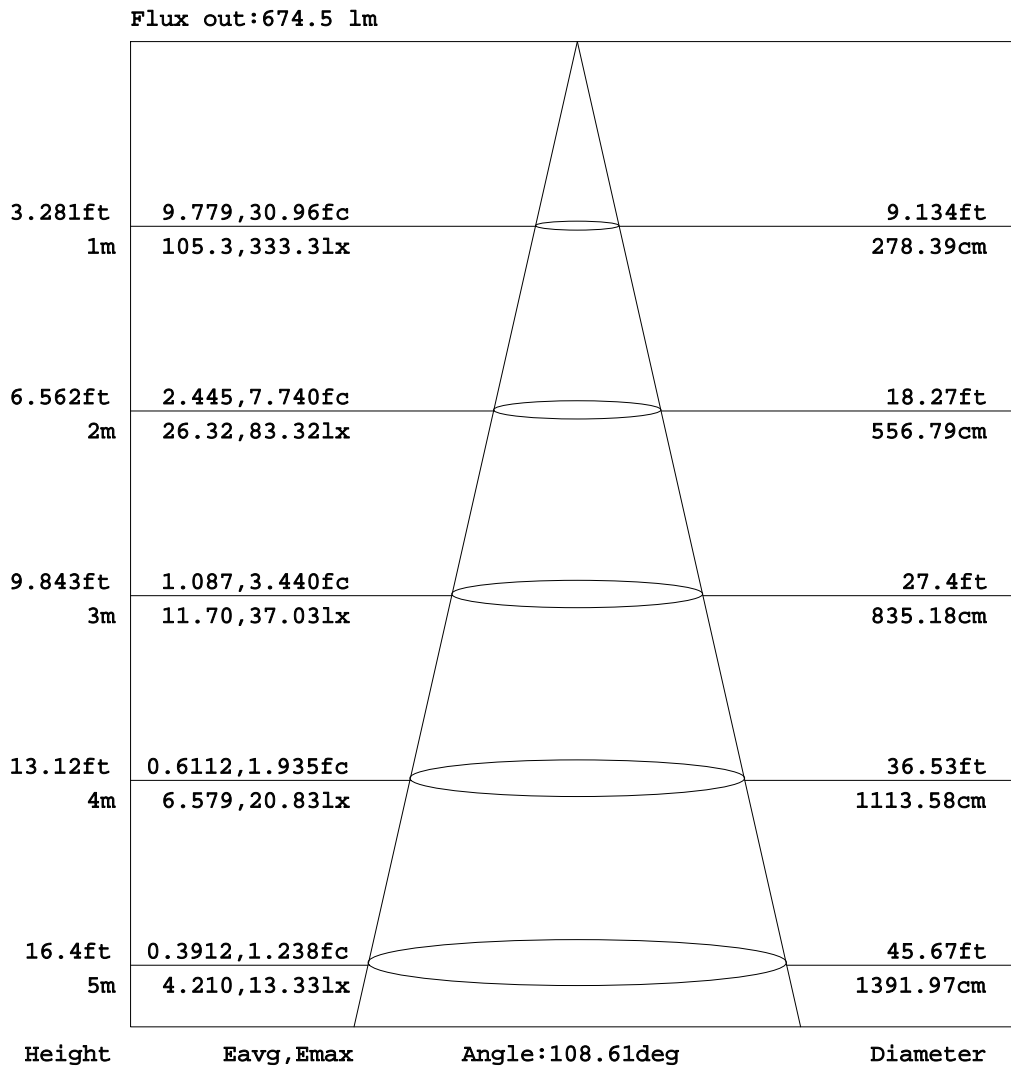


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-6

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.700m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:240.8V I:0.0560A P:12.60W PF:0.9370 Lamp Flux:1105.13x1 lm		
NAME: LED-B12W-NW	TYPE:12W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.:	SUR.:0.0198	PROTECTION ANGLE:

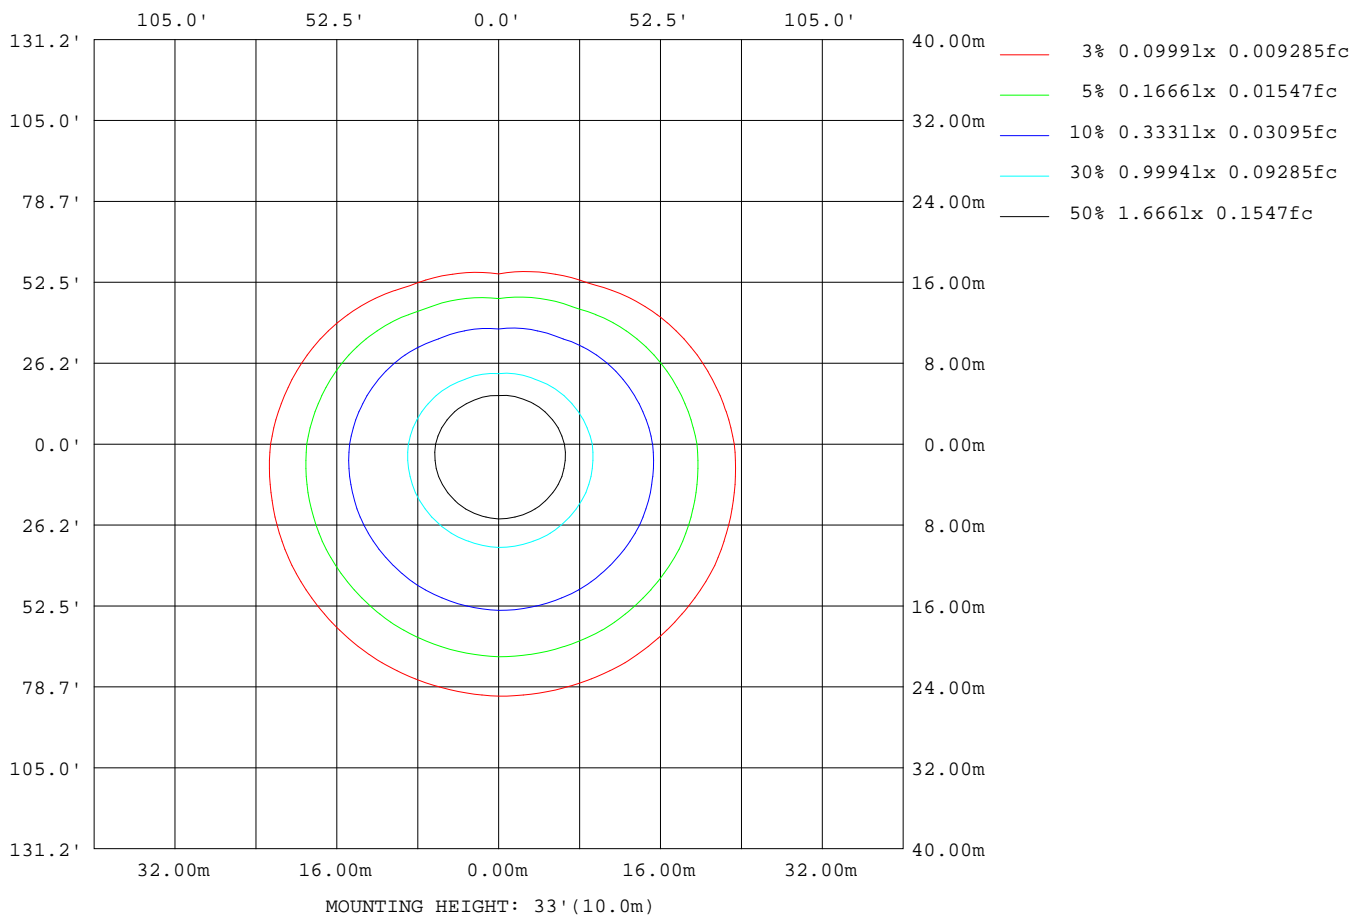

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-6

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.700m [K=1.0000]
 Remarks:

Planar Illuminance Curve

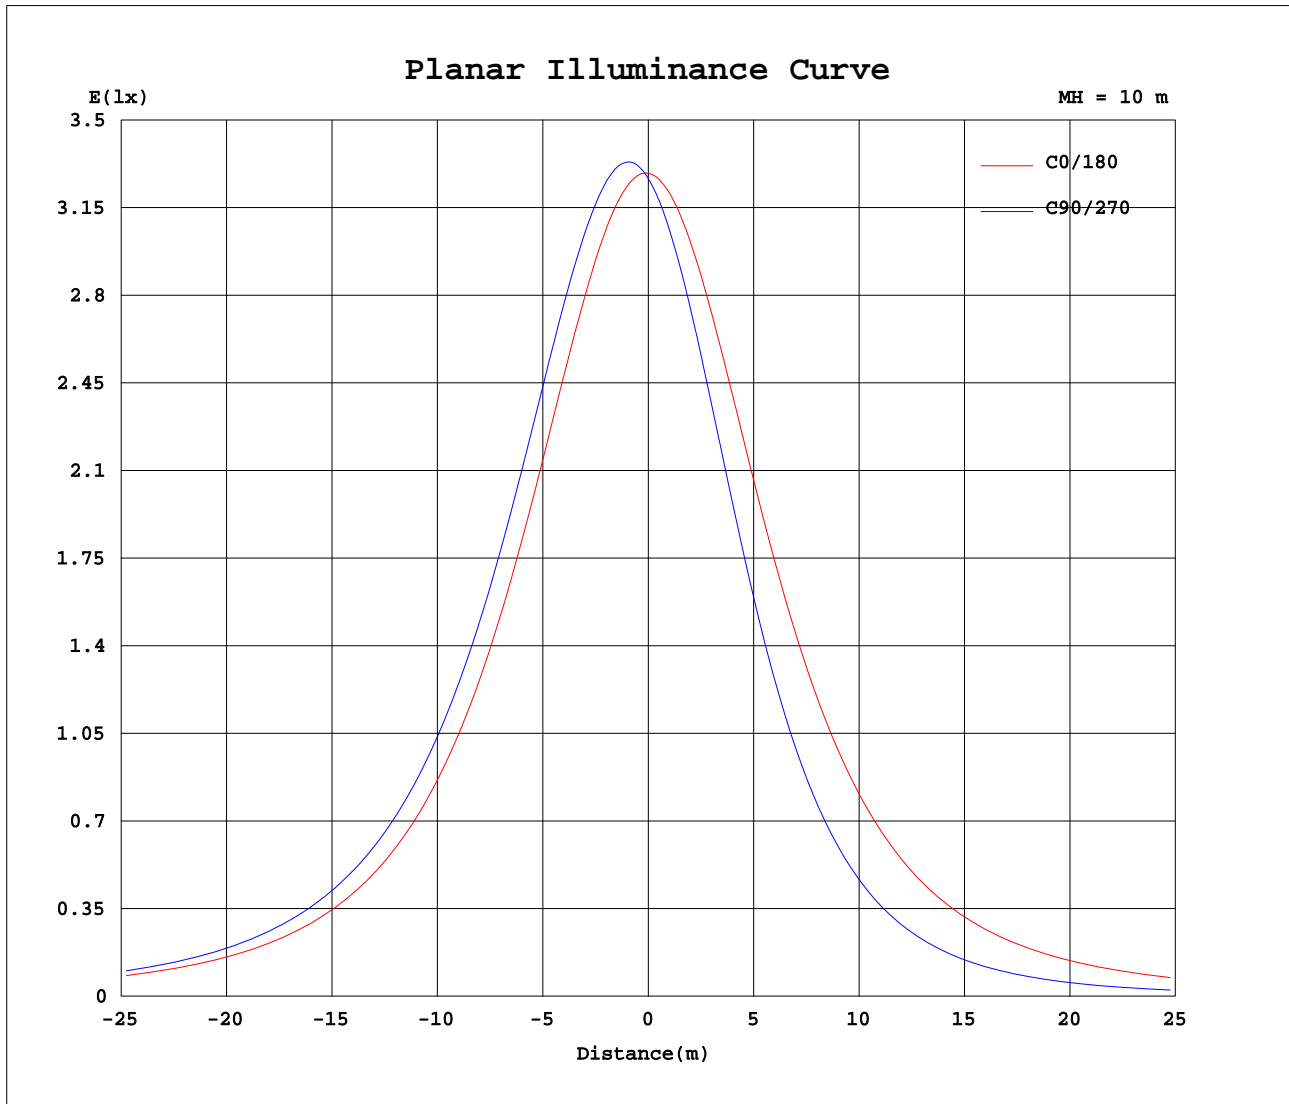

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2017-6

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 9.700m [K=1.0000]
 Remarks:

