
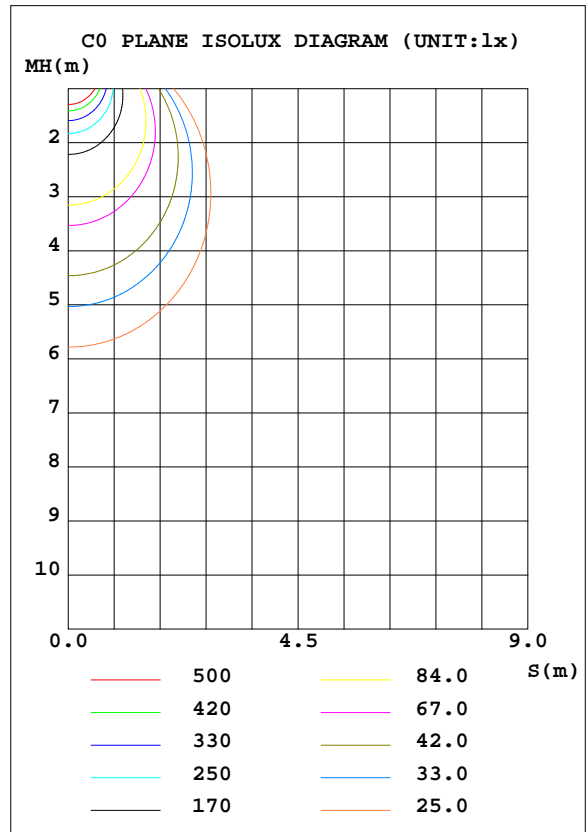


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.4V I:0.1130A P:25.60W PF:0.9450 Lamp Flux:2398.68x1 lm		
NAME: LED-OY25W-CC-IP54	TYPE:25W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:0.135	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 93.70 lm/W			
MODEL	LED-OY25W-CC-IP54	I <sub>max</sub> (cd)	830.2	S/MH(C0/180)	1.25
NOMINAL POWER(W)	25	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	2398.7	η UP, DN(C0-180)	0.9, 48.7
NOMINAL FLUX(lm)	2398.68	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.9, 49.5
LAMPS INSIDE	1	η up(%)	1.8	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	240.4	η down(%)	98.2	CIBSE SHR MAX	1.35

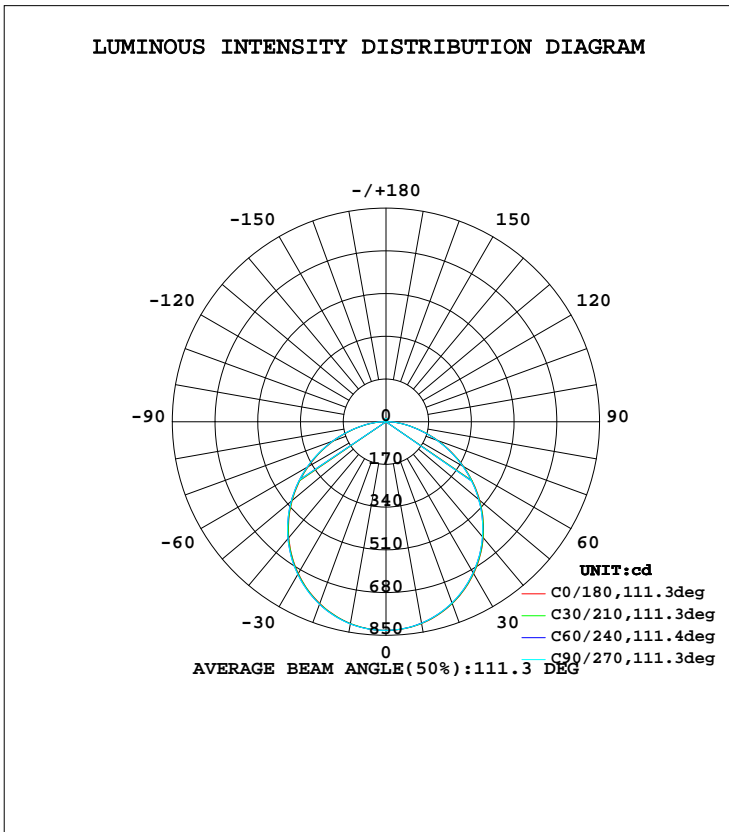

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2019-03-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:9.443m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φlum, lamp
10	815.6	814.1	814.1	814.2	815.4	816.0	817.1	816.9	0- 10	78.55	78.55	3.27,3.27
20	770.1	768.3	767.2	767.4	769.9	772.0	773.0	772.6	10- 20	224.7	303.3	12.6,12.6
30	698.0	695.1	693.9	694.2	697.6	700.1	702.0	701.3	20- 30	339.6	642.9	26.8,26.8
40	602.0	599.1	597.3	597.6	601.8	605.2	606.9	606.1	30- 40	408.1	1051	43.8,43.8
50	486.6	483.7	482.1	482.4	487.2	490.7	492.4	491.3	40- 50	421.5	1473	61.4,61.4
60	356.6	353.7	352.0	352.6	357.0	361.9	363.1	361.9	50- 60	378.5	1851	77.2,77.2
70	220.2	217.4	216.3	217.4	221.4	225.4	226.8	224.9	60- 70	286.1	2137	89.1,89.1
80	94.07	92.83	91.82	94.19	96.92	98.01	99.83	97.65	70- 80	164.9	2302	96,96
90	13.67	12.94	12.71	12.59	13.73	14.21	15.17	13.92	80- 90	53.04	2355	98.2,98.2
100	2.836	2.797	2.966	2.818	3.222	3.030	3.050	3.479	90-100	6.474	2362	98.5,98.5
110	3.981	4.093	4.113	4.149	4.441	4.339	4.301	4.286	100-110	3.699	2365	98.6,98.6
120	5.588	5.715	5.762	5.806	6.119	5.999	5.950	5.926	110-120	4.986	2370	98.8,98.8
130	7.268	7.377	7.457	7.457	7.789	7.677	7.602	7.587	120-130	5.992	2376	99.1,99.1
140	8.867	8.978	9.063	9.059	9.358	9.234	9.168	9.156	130-140	6.432	2383	99.3,99.3
150	10.28	10.40	10.49	10.48	10.70	10.59	10.53	10.54	140-150	6.153	2389	99.6,99.6
160	11.52	11.61	11.68	11.67	11.82	11.73	11.67	11.68	150-160	5.121	2394	99.8,99.8
170	12.58	12.65	12.68	12.68	12.73	12.66	12.61	12.62	160-170	3.439	2397	99.9,99.9
180	13.08	13.08	13.11	13.09	13.12	13.08	13.07	13.08	170-180	1.228	2399	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2019-03-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:9.443m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.1130A P:25.60W PF:0.9450 Lamp Flux:2398.68x1 lm		
NAME: LED-OY25W-CC-IP54	TYPE:25W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:0.135	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.77	.74	.70	.68
3.0	.79	.71	.64	.77	.70	.63	.74	.67	.62	.71	.65	.61	.68	.64	.60	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.55	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.35	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

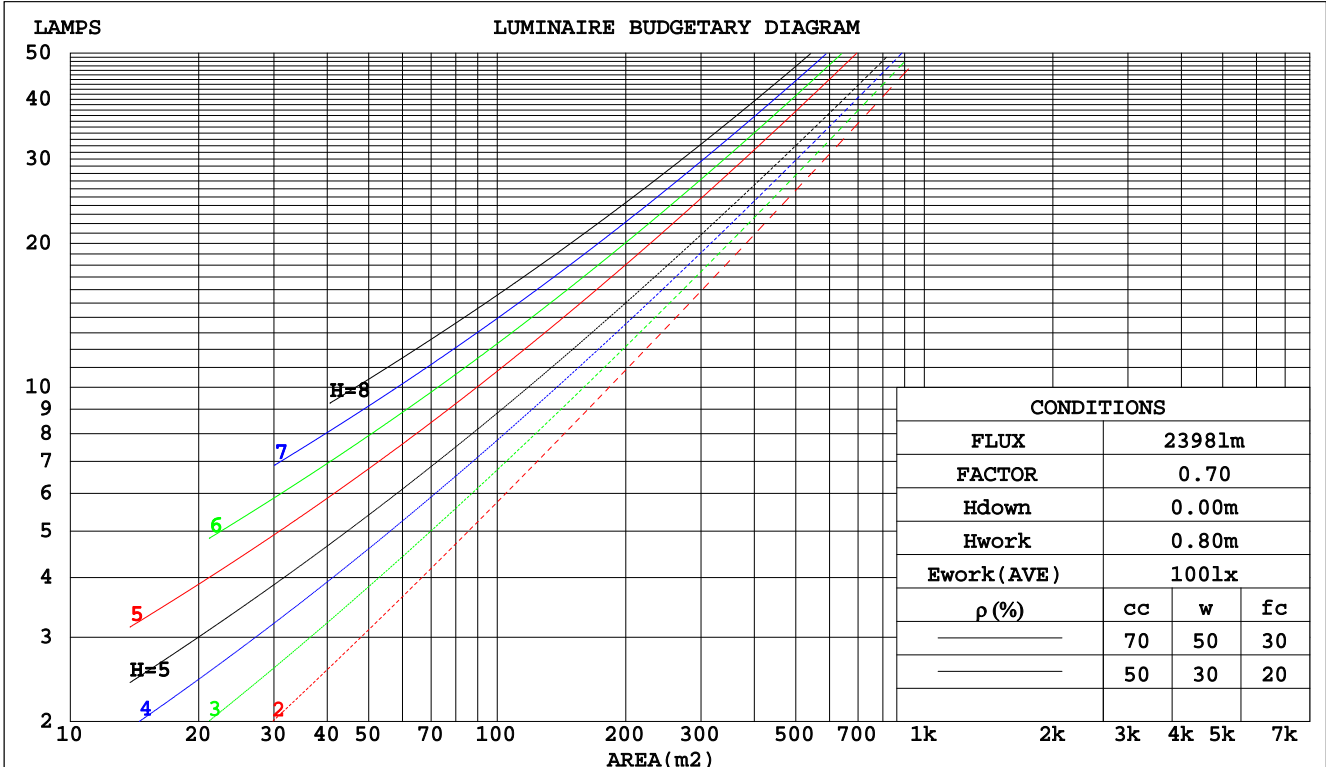

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2019-03-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:9.443m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:240.4V I:0.1130A P:25.60W PF:0.9450 Lamp Flux:2398.68x1 lm		
NAME: LED-OY25W-CC-IP54	TYPE:25W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:0.135	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.312	.177	.056	.304	.174	.055	.290	.166	.053	.277	.160	.051	.265	.153	.049	
2.0	.292	.160	.049	.285	.157	.048	.273	.152	.047	.261	.146	.046	.250	.142	.045	
3.0	.270	.144	.043	.264	.141	.043	.253	.137	.042	.242	.133	.041	.232	.129	.040	
4.0	.249	.129	.038	.243	.127	.038	.233	.124	.037	.224	.120	.036	.215	.117	.036	
5.0	.230	.117	.034	.225	.116	.034	.216	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.213	.107	.031	.209	.106	.030	.201	.103	.030	.193	.101	.030	.186	.098	.029	
7.0	.198	.098	.028	.195	.097	.028	.187	.095	.027	.181	.093	.027	.174	.091	.027	
8.0	.185	.090	.025	.182	.090	.025	.175	.088	.025	.169	.086	.025	.164	.084	.024	
9.0	.174	.084	.023	.170	.083	.023	.165	.081	.023	.159	.080	.023	.154	.078	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.075	.021	.145	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.204	.204	.204	.175	.175	.175	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.194	.170	.148	.166	.146	.127	.114	.100	.088	.065	.058	.051	.021	.019	.017	
2.0	.186	.146	.112	.160	.126	.097	.109	.087	.068	.063	.051	.040	.020	.016	.013	
3.0	.179	.128	.088	.153	.111	.077	.105	.077	.054	.061	.045	.032	.020	.015	.010	
4.0	.171	.115	.073	.147	.099	.063	.101	.069	.044	.058	.041	.026	.019	.013	.009	
5.0	.163	.105	.061	.140	.091	.053	.097	.063	.038	.056	.037	.022	.018	.012	.007	
6.0	.156	.096	.053	.134	.084	.047	.093	.058	.033	.054	.034	.020	.017	.011	.006	
7.0	.150	.090	.048	.129	.078	.041	.089	.054	.029	.052	.032	.017	.017	.011	.006	
8.0	.143	.084	.043	.123	.073	.038	.085	.051	.027	.050	.030	.016	.016	.010	.005	
9.0	.137	.079	.040	.118	.068	.035	.082	.048	.025	.048	.028	.015	.015	.009	.005	
10.0	.131	.075	.037	.113	.065	.032	.079	.046	.023	.046	.027	.014	.015	.009	.005	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2019-03-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:9.443m [K=1.0000]  
 Remarks:

Uncorrected UGR Table

Test:U:240.4V I:0.1130A P:25.60W PF:0.9450 Lamp Flux:2398.68x1 lm										
NAME: LED-OY25W-CC-IP54					TYPE:25W			WEIGHT:		
DIM.:					SPEC.:3000K			SERIAL No.:1		
MFR.:					SUR.:0.135			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.6	23.1	21.9	23.4	23.6	21.5	23.0	21.8	23.3	23.5
3H	23.1	24.5	23.4	24.8	25.0	23.0	24.4	23.3	24.7	24.9
4H	23.7	25.0	24.1	25.3	25.6	23.6	24.9	23.9	25.2	25.5
6H	24.1	25.4	24.5	25.7	26.0	24.0	25.2	24.4	25.5	25.9
8H	24.3	25.5	24.6	25.8	26.1	24.1	25.3	24.5	25.7	26.0
12H	24.4	25.5	24.8	25.9	26.2	24.2	25.4	24.6	25.7	26.1
4H 2H	22.2	23.5	22.6	23.8	24.1	22.1	23.5	22.5	23.7	24.0
3H	23.9	25.0	24.3	25.4	25.7	23.8	24.9	24.2	25.3	25.6
4H	24.6	25.6	25.0	26.0	26.4	24.5	25.5	24.9	25.9	26.3
6H	25.1	26.1	25.6	26.5	26.9	25.0	26.0	25.5	26.3	26.7
8H	25.3	26.2	25.8	26.6	27.0	25.2	26.1	25.7	26.5	26.9
12H	25.5	26.3	26.0	26.7	27.2	25.4	26.2	25.8	26.6	27.0
8H 4H	24.8	25.7	25.3	26.1	26.5	24.7	25.6	25.2	26.0	26.4
6H	25.5	26.3	26.0	26.7	27.2	25.4	26.2	25.9	26.6	27.1
8H	25.8	26.5	26.3	26.9	27.4	25.7	26.4	26.2	26.8	27.3
12H	26.1	26.6	26.6	27.1	27.6	25.9	26.5	26.4	27.0	27.5
12H 4H	24.8	25.6	25.3	26.1	26.5	24.8	25.6	25.2	26.0	26.4
6H	25.6	26.2	26.1	26.7	27.2	25.5	26.1	26.0	26.6	27.1
8H	25.9	26.5	26.4	27.0	27.5	25.8	26.4	26.3	26.8	27.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117 Corrected 2399 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.0)

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2019-03-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:9.443m [K=1.0000]  
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.1130A P:25.60W PF:0.9450 Lamp Flux:2398.68x1 lm		
NAME: LED-OY25W-CC-IP54	TYPE:25W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:0.135	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	82	72	65	81	71	64	78	69	63	56
1.50	87	77	70	86	76	70	82	75	69	61
2.00	94	86	79	92	84	78	89	82	77	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	102	95	89	99	93	88	95	90	85	76
4.00	106	100	95	103	98	94	98	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2019-03-21

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:9.443m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:240.4V I:0.1130A P:25.60W PF:0.9450 Lamp Flux:2398.68x1 lm		
NAME: LED-OY25W-CC-IP54	TYPE:25W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:0.135	PROTECTION ANGLE:

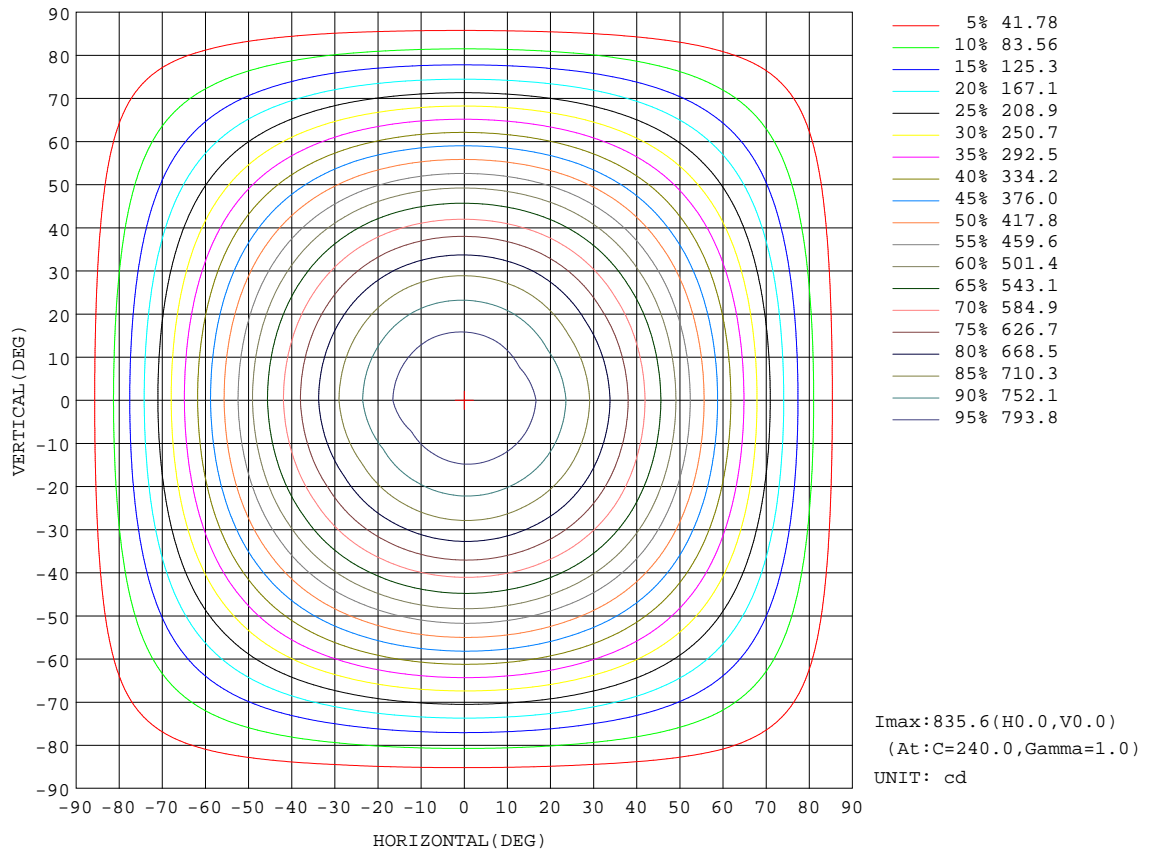


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2019-03-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:9.443m [K=1.0000]  
 Remarks:

AAI Figure

Test:U:240.4V I:0.1130A P:25.60W PF:0.9450 Lamp Flux:2398.68x1 lm		
NAME: LED-OY25W-CC-IP54	TYPE:25W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:0.135	PROTECTION ANGLE:

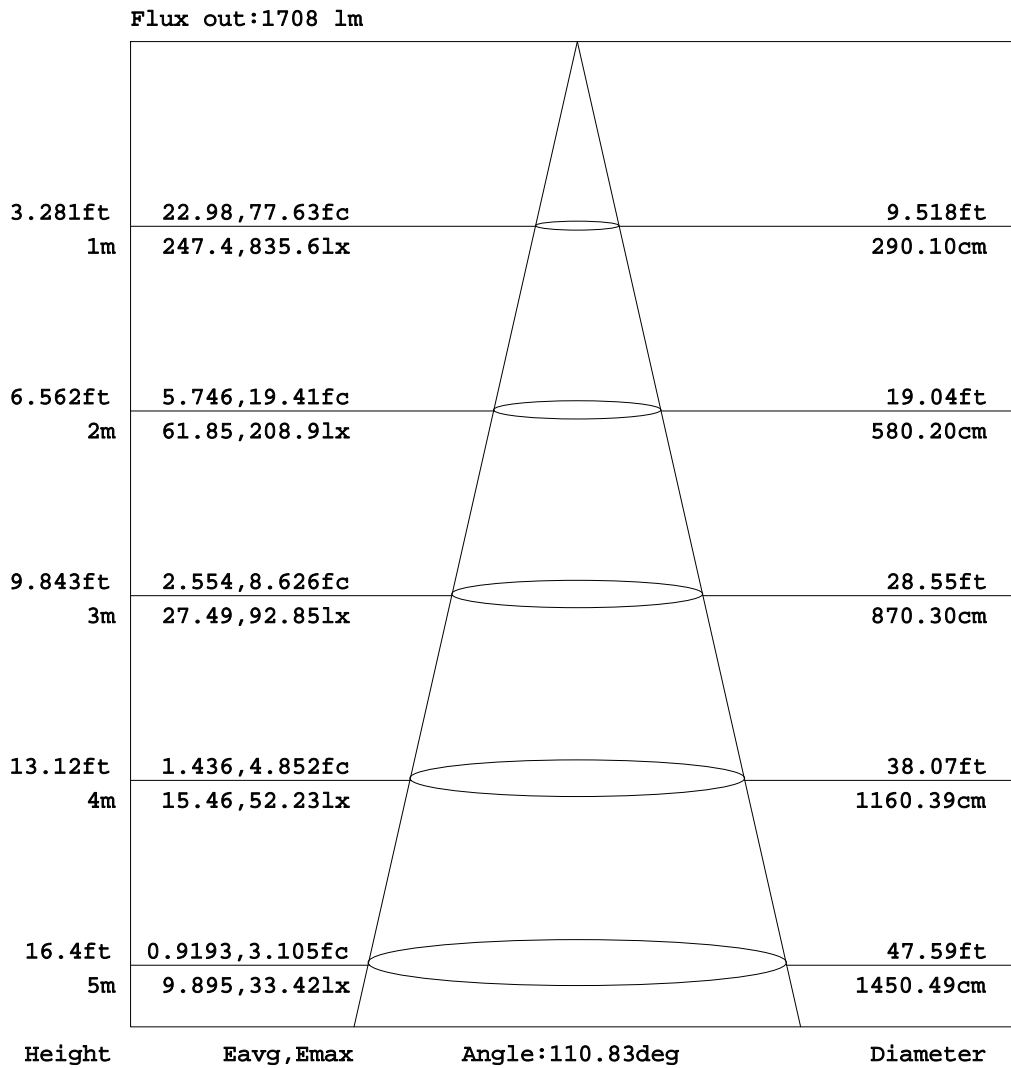

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2019-03-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:9.443m [K=1.0000]  
 Remarks:



**ISOLUX DIAGRAM**


Test:U:240.4V I:0.1130A P:25.60W PF:0.9450 Lamp Flux:2398.68x1 lm		
NAME: LED-OY25W-CC-IP54	TYPE:25W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:0.135	PROTECTION ANGLE:

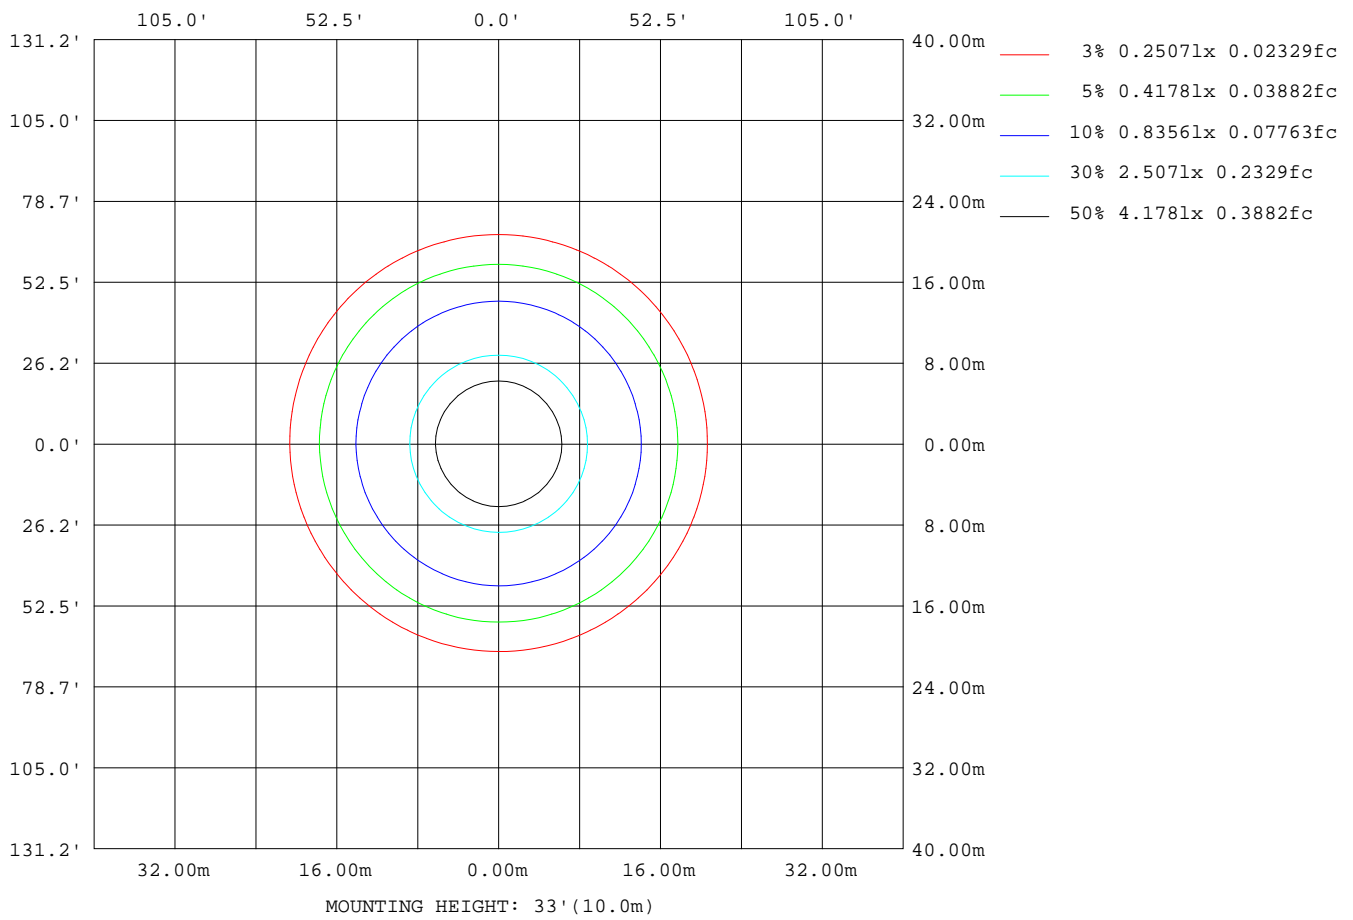

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2019-03-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:9.443m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

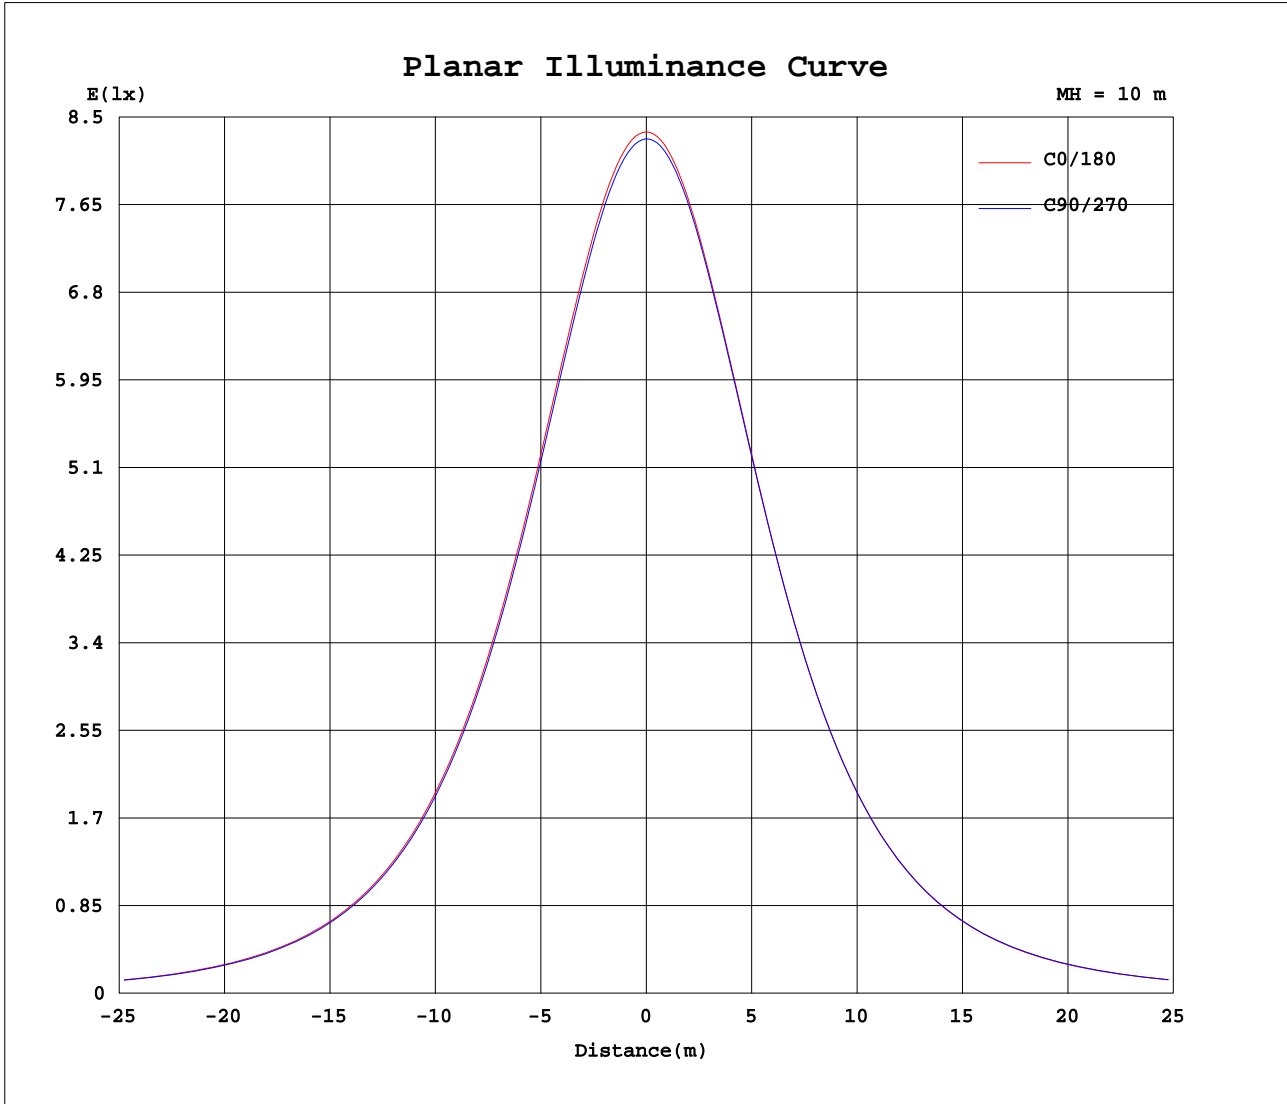

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2019-03-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity: 65.0%  
 Test Distance: 9.443m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.4V I:0.1130A P:25.60W PF:0.9450 Lamp Flux:2398.68x1 lm		
NAME: LED-OY25W-CC-IP54	TYPE:25W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:0.135	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG)\γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	830	830	830	830	830	830	830	830	830	830	830	830							
5	827	826	826	826	826	826	827	827	827	828	828	827							
10	816	815	813	814	814	815	815	815	817	817	817	817							
15	797	795	794	794	794	795	796	797	798	799	799	798							
20	770	769	767	767	767	768	770	771	773	773	773	772							
25	737	736	734	734	733	735	737	738	740	741	741	739							
30	698	696	694	694	693	695	698	699	701	702	702	700							
35	653	651	648	648	647	650	652	654	657	657	658	655							
40	602	601	597	597	596	599	602	604	607	607	607	605							
45	546	545	542	542	541	543	547	548	552	552	552	549							
50	487	485	482	482	481	484	487	489	492	492	493	490							
55	423	422	419	419	418	420	424	426	429	429	429	426							
60	357	355	352	352	351	354	357	360	364	363	364	360							
65	288	287	284	284	284	286	289	292	295	295	294	292							
70	220	219	216	216	216	218	221	224	227	227	226	224							
75	154	153	150	151	151	154	156	158	160	160	160	157							
80	94.1	94.1	91.6	91.8	92.5	95.9	96.9	96.8	99.3	99.8	99.3	96.0							
85	44.3	45.4	43.3	43.4	43.8	46.2	47.2	46.4	48.2	48.5	47.9	45.5							
90	13.7	13.7	12.2	12.7	11.9	13.3	13.7	14.2	14.2	15.2	14.0	13.9							
95	5.17	3.64	3.99	5.38	4.67	3.36	4.20	5.96	5.44	4.27	5.50	6.77							
100	2.84	2.75	2.84	2.97	2.85	2.79	3.22	3.15	2.91	3.05	3.41	3.55							
105	3.26	3.30	3.36	3.35	3.36	3.33	3.67	3.58	3.52	3.53	3.59	3.54							
110	3.98	4.03	4.15	4.11	4.19	4.11	4.44	4.37	4.30	4.30	4.29	4.29							
115	4.78	4.84	4.92	4.94	5.04	4.92	5.27	5.21	5.12	5.12	5.10	5.10							
120	5.59	5.68	5.75	5.76	5.85	5.76	6.12	6.04	5.96	5.95	5.92	5.93							
125	6.42	6.51	6.58	6.61	6.67	6.61	6.98	6.88	6.82	6.78	6.76	6.76							
130	7.27	7.33	7.42	7.46	7.48	7.43	7.79	7.72	7.64	7.60	7.58	7.60							
135	8.07	8.14	8.25	8.26	8.30	8.25	8.60	8.51	8.43	8.41	8.38	8.40							
140	8.87	8.93	9.02	9.06	9.08	9.04	9.36	9.27	9.20	9.17	9.13	9.18							
145	9.61	9.67	9.75	9.79	9.80	9.77	10.1	9.96	9.92	9.88	9.87	9.90							
150	10.3	10.4	10.4	10.5	10.5	10.5	10.7	10.6	10.6	10.5	10.5	10.5							
155	10.9	11.0	11.1	11.1	11.1	11.1	11.3	11.2	11.2	11.1	11.1	11.1							
160	11.5	11.6	11.6	11.7	11.7	11.7	11.8	11.7	11.7	11.7	11.7	11.7							
165	12.1	12.1	12.2	12.2	12.2	12.2	12.3	12.2	12.2	12.2	12.2	12.2							
170	12.6	12.6	12.7	12.7	12.7	12.7	12.7	12.7	12.6	12.6	12.6	12.6							
175	12.9	13.0	12.9	13.0	13.0	13.0	13.0	13.0	13.0	12.9	12.9	12.9							
180	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1							

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2019-03-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:9.443m [K=1.0000]  
 Remarks: