
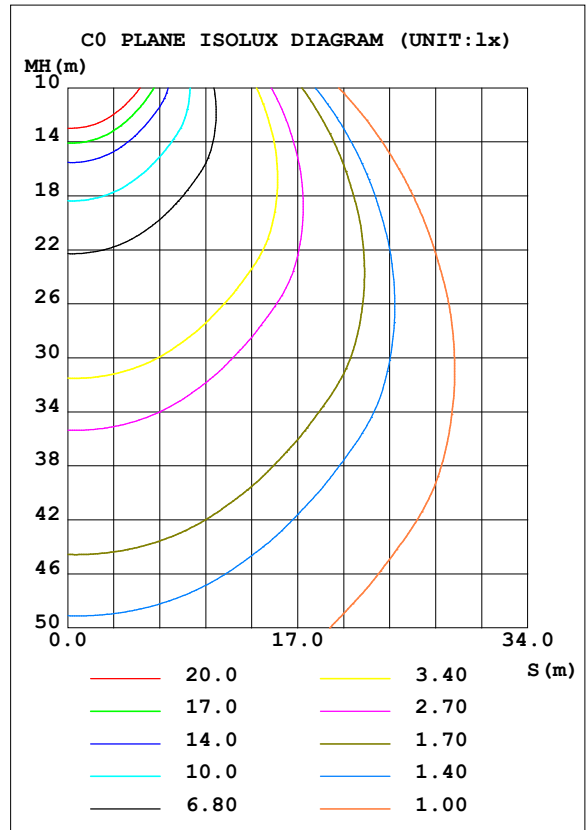


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 121.55 lm/W			
MODEL	70W	I <sub>max</sub> (cd)	3368	S/MH (C0/180)	1.30
NOMINAL POWER (W)	70	LOR (%)	100.0	S/MH (C90/270)	1.27
RATED VOLTAGE (V)	277	TOTAL FLUX (lm)	9116.4	η UP, DN (C0-180)	0.8, 49.8
NOMINAL FLUX (lm)	9116.4	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.8, 48.6
LAMPS INSIDE	1	η up (%)	1.6	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	220	η down (%)	98.4	CIBSE SHR MAX	1.35

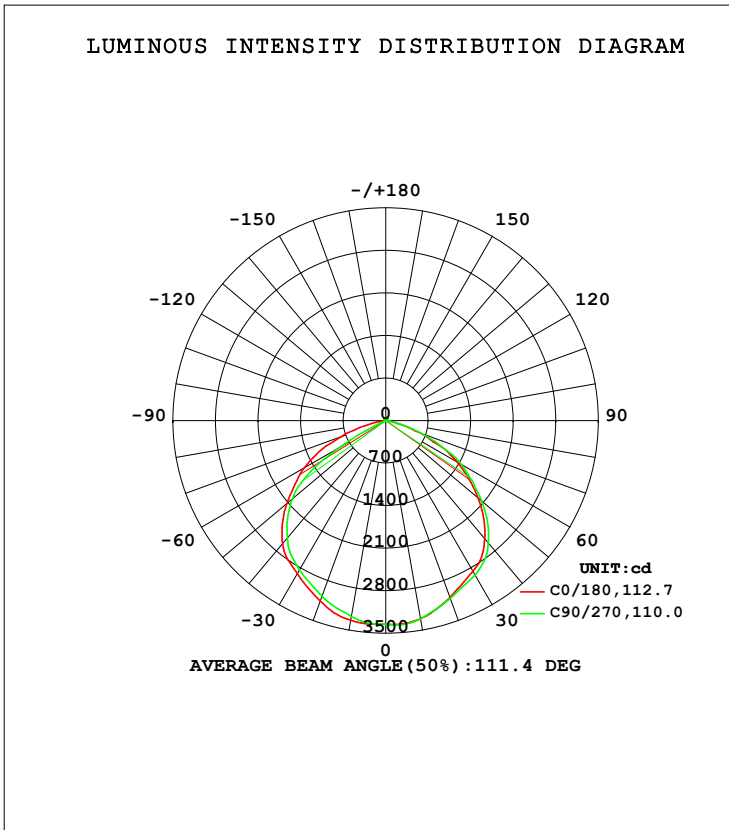

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 01 November 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.295  
 Humidity: 65.0%  
 Test Distance: 8.250m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	3309	3308	3310	3333	3335	3315	3274	3281	0- 10	318.7	318.7	3.5,3.5
20	3096	3074	3112	3133	3156	3119	3075	3078	10- 20	908.9	1228	13.5,13.5
30	2865	2761	2937	2815	2909	2803	2842	2757	20- 30	1370	2598	28.5,28.5
40	2537	2509	2628	2546	2644	2488	2521	2449	30- 40	1691	4289	47,47
50	1980	2088	2062	2170	2127	2118	2003	2046	40- 50	1798	6087	66.8,66.8
60	1349	1398	1436	1518	1540	1506	837.5	1397	50- 60	1561	7647	83.9,83.9
70	610.9	665.8	638.6	814.1	787.2	787.9	13.40	670.7	60- 70	962.9	8610	94.4,94.4
80	67.44	55.90	52.82	101.0	158.3	144.7	2.693	77.10	70- 80	332.6	8943	98.1,98.1
90	5.085	6.851	7.356	6.734	8.297	8.658	4.262	5.051	80- 90	25.62	8968	98.4,98.4
100	10.15	10.41	5.741	9.391	10.39	9.952	9.228	10.81	90-100	7.992	8976	98.5,98.5
110	17.28	16.40	11.09	15.04	18.23	16.58	15.21	17.45	100-110	13.29	8990	98.6,98.6
120	24.82	23.33	20.34	21.60	26.01	23.40	22.37	24.30	110-120	19.42	9009	98.8,98.8
130	30.85	29.42	27.13	27.27	32.68	29.33	29.26	30.28	120-130	23.74	9033	99.1,99.1
140	35.39	34.54	32.80	32.51	37.14	34.31	34.92	35.01	130-140	24.84	9058	99.4,99.4
150	39.02	39.62	37.79	37.00	40.43	38.42	38.67	38.47	140-150	22.96	9080	99.6,99.6
160	43.16	44.17	42.34	40.87	44.24	41.68	42.20	41.25	150-160	18.75	9099	99.8,99.8
170	48.80	48.22	46.50	44.65	49.04	45.72	46.92	45.11	160-170	12.57	9112	99.9,99.9
180	51.51	49.07	50.59	47.60	51.65	48.96	50.72	47.53	170-180	4.595	9116	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 5193.3 lm

%lum = 57.0%

%lamp = 57.0%

Conical surface Flux(120deg): 7647.2 lm

%lum = 83.9%


%lamp = 83.9%

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:01 November 2018

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.295  
 Humidity:65.0%  
 Test Distance:8.250m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

<b>NAME:</b>	<b>TYPE:</b>	<b>WEIGHT:</b>
<b>SPEC.:</b>	<b>DIM.:</b>	<b>SERIAL No.:</b>
<b>MFR.:</b>	<b>SUR.:</b>	<b>Shielding Angle:</b>

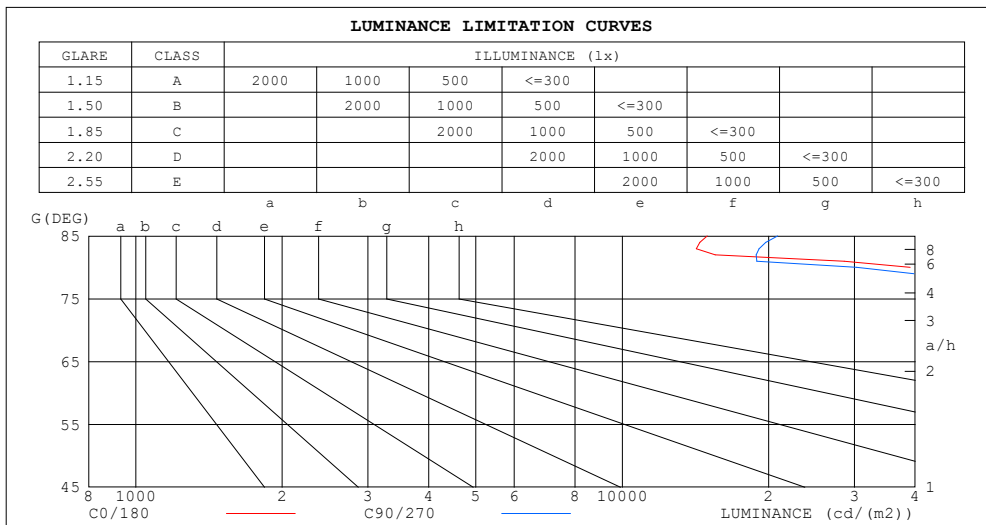

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	14958	20862
80	39085	30338
75	106463	109581
70	179756	186218
65	240481	237603
60	271563	286360
55	293199	302766
50	310033	319920
45	324828	334856


C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 01 November 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.295  
 Humidity: 65.0%  
 Test Distance: 8.250m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.05	1.02	.98	1.03	.90	.96	.98	.96	.93	.94	.92	.90	.91	.89	.87	.85
2.0	.93	.86	.81	.91	.85	.80	.87	.82	.78	.83	.79	.76	.80	.77	.74	.72
3.0	.82	.74	.68	.80	.73	.67	.77	.71	.66	.74	.69	.65	.71	.67	.63	.61
4.0	.73	.64	.58	.71	.63	.57	.69	.62	.56	.66	.60	.55	.64	.59	.55	.52
5.0	.65	.56	.50	.64	.56	.50	.61	.54	.49	.59	.53	.48	.57	.52	.48	.45
6.0	.58	.50	.44	.57	.49	.43	.55	.48	.43	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.38	.49	.42	.37	.47	.42	.37	.35
8.0	.48	.40	.34	.48	.40	.34	.46	.39	.34	.45	.38	.33	.43	.38	.33	.31
9.0	.44	.36	.31	.44	.36	.31	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.37	.31	.27	.25

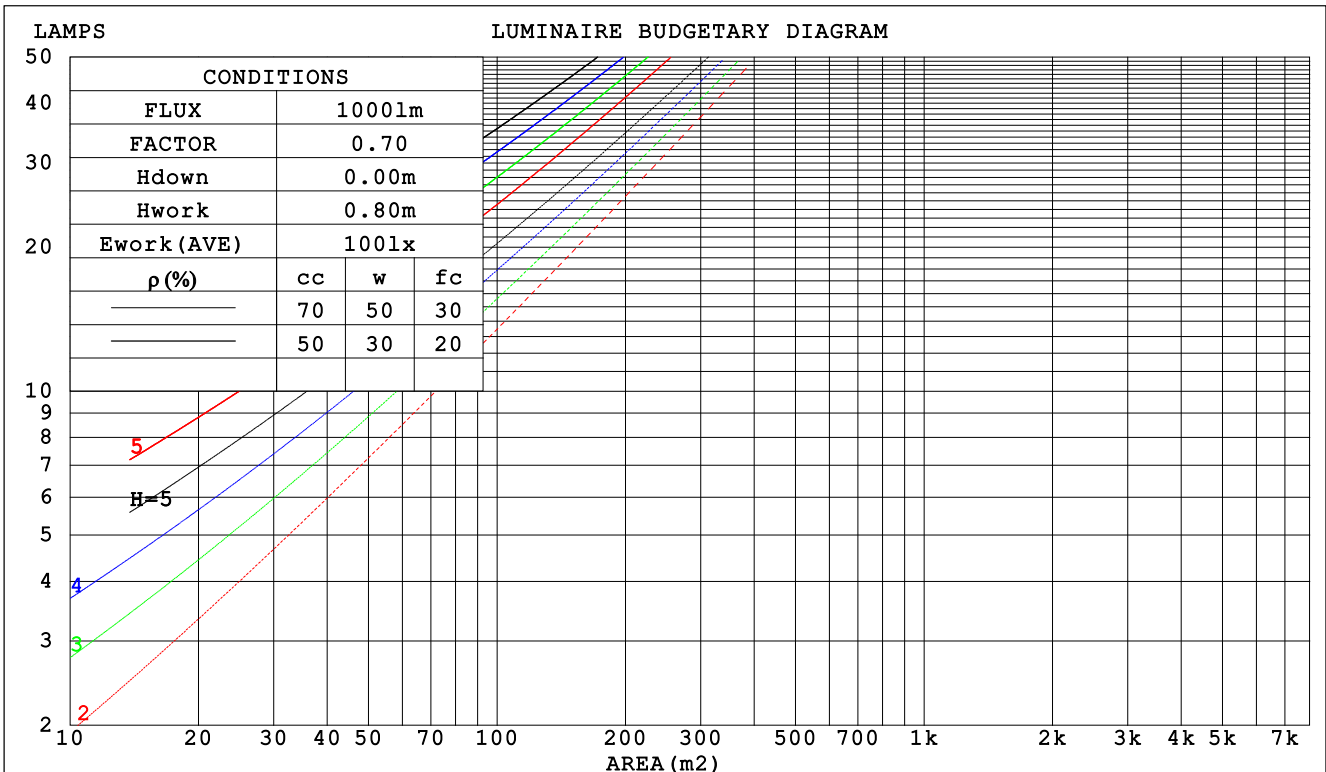

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 01 November 2018

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.295  
 Humidity: 65.0%  
 Test Distance: 8.250m [K=1.0000]  
 Remarks:

WEC AND CCEC

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ <sub>cc</sub>	80%			70%			50%			30%			10%			0
ρ <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.274	.156	.049	.266	.152	.048	.252	.145	.046	.239	.138	.044	.227	.132	.043	
2.0	.267	.146	.045	.260	.143	.044	.248	.138	.043	.236	.133	.042	.226	.128	.040	
3.0	.252	.134	.040	.246	.132	.040	.235	.128	.039	.225	.123	.038	.216	.119	.037	
4.0	.236	.123	.036	.231	.121	.036	.221	.117	.035	.212	.114	.034	.204	.111	.034	
5.0	.220	.112	.033	.216	.111	.032	.207	.108	.032	.199	.105	.031	.192	.102	.031	
6.0	.206	.103	.030	.202	.102	.029	.194	.099	.029	.187	.097	.029	.180	.095	.028	
7.0	.193	.095	.027	.189	.094	.027	.182	.092	.027	.176	.090	.026	.169	.088	.026	
8.0	.181	.088	.025	.178	.087	.025	.171	.086	.024	.165	.084	.024	.160	.082	.024	
9.0	.170	.082	.023	.167	.081	.023	.161	.080	.023	.156	.078	.022	.151	.077	.022	
10.0	.160	.077	.021	.158	.076	.021	.152	.075	.021	.148	.073	.021	.143	.072	.021	

ρ <sub>cc</sub>	80%			70%			50%			30%			10%			0
ρ <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.203	.203	.203	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.190	.169	.150	.163	.145	.129	.111	.100	.089	.064	.058	.052	.021	.019	.017	
2.0	.181	.145	.114	.155	.124	.098	.107	.086	.068	.061	.050	.040	.020	.016	.013	
3.0	.174	.127	.089	.149	.109	.078	.102	.076	.054	.059	.044	.032	.019	.014	.011	
4.0	.166	.113	.073	.143	.098	.063	.098	.068	.045	.057	.040	.026	.018	.013	.009	
5.0	.159	.103	.061	.137	.089	.053	.094	.062	.038	.055	.037	.022	.018	.012	.007	
6.0	.152	.095	.053	.131	.082	.046	.090	.057	.033	.052	.034	.019	.017	.011	.006	
7.0	.146	.088	.047	.126	.076	.041	.087	.053	.029	.050	.031	.017	.016	.010	.006	
8.0	.140	.082	.042	.120	.071	.037	.083	.050	.026	.048	.029	.016	.016	.010	.005	
9.0	.134	.077	.039	.115	.067	.034	.080	.047	.024	.047	.028	.014	.015	.009	.005	
10.0	.128	.073	.036	.111	.063	.031	.077	.044	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:01 November 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.295  
 Humidity:65.0%  
 Test Distance:8.250m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

NAME:		TYPE:					WEIGHT:				
SPEC.:		DIM.:					SERIAL No.:				
MFR.:		SUR.:					Shielding Angle:				
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		25.0	26.5	25.3	26.7	26.9	25.2	26.6	25.4	26.8	27.1
	3H	25.9	27.2	26.2	27.5	27.7	26.1	27.4	26.4	27.6	27.9
	4H	26.0	27.3	26.3	27.5	27.8	26.2	27.4	26.5	27.7	28.0
	6H	26.0	27.1	26.3	27.4	27.7	26.1	27.3	26.5	27.6	27.9
	8H	25.9	27.0	26.3	27.3	27.7	26.1	27.2	26.4	27.5	27.8
	12H	25.9	26.9	26.2	27.3	27.6	26.0	27.1	26.4	27.4	27.8
	4H 2H	25.5	26.8	25.8	27.0	27.3	25.6	26.9	26.0	27.2	27.4
	3H	26.5	27.6	26.9	27.9	28.2	26.6	27.7	27.0	28.0	28.4
	4H	26.7	27.6	27.1	28.0	28.3	26.8	27.8	27.2	28.1	28.5
	6H	26.6	27.5	27.0	27.9	28.3	26.8	27.6	27.2	28.0	28.4
	8H	26.6	27.4	27.0	27.8	28.2	26.7	27.5	27.1	27.9	28.3
	12H	26.5	27.3	27.0	27.7	28.1	26.7	27.4	27.1	27.8	28.2
	8H 4H	26.7	27.5	27.1	27.9	28.3	26.8	27.6	27.2	28.0	28.4
	6H	26.6	27.3	27.1	27.7	28.2	26.8	27.4	27.2	27.8	28.3
	8H	26.6	27.2	27.1	27.6	28.1	26.7	27.3	27.2	27.8	28.2
	12H	26.6	27.1	27.1	27.5	28.0	26.7	27.2	27.2	27.7	28.2
	12H 4H	26.6	27.3	27.1	27.8	28.2	26.7	27.5	27.2	27.9	28.3
	6H	26.6	27.2	27.1	27.6	28.1	26.7	27.3	27.2	27.8	28.2
	8H	26.6	27.1	27.1	27.5	28.0	26.7	27.2	27.2	27.7	28.2
Variations with the observer position at spacings:											
S = 1.0H		+ 0.3 / - 0.4					+ 0.3 / - 0.4				
1.5H		+ 0.3 / - 0.6					+ 0.3 / - 0.5				
2.0H		+ 0.5 / - 0.5					+ 0.5 / - 0.5				

CIE Pub.117, 9116 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 7.7)

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:01 November 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.295  
 Humidity:65.0%  
 Test Distance:8.250m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	47	40	58	47	40	56	46	40	33
0.80	69	58	51	68	57	50	66	56	50	43
1.00	78	67	60	77	67	60	74	68	59	52
1.25	85	75	68	84	74	68	81	73	67	60
1.50	90	81	74	88	80	74	85	78	72	65
2.00	97	89	83	95	88	82	91	85	80	73
2.50	100	93	88	98	92	87	94	89	85	76
3.00	104	97	92	101	96	91	97	93	89	80
4.00	107	102	98	105	100	96	100	97	94	85
5.00	109	105	101	107	103	100	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 01 November 2018

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.295  
 Humidity: 65.0%  
 Test Distance: 8.250m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

<b>NAME:</b>	<b>TYPE:</b>	<b>WEIGHT:</b>
<b>SPEC.:</b>	<b>DIM.:</b>	<b>SERIAL No.:</b>
<b>MFR.:</b>	<b>SUR.:</b>	<b>Shielding Angle:</b>

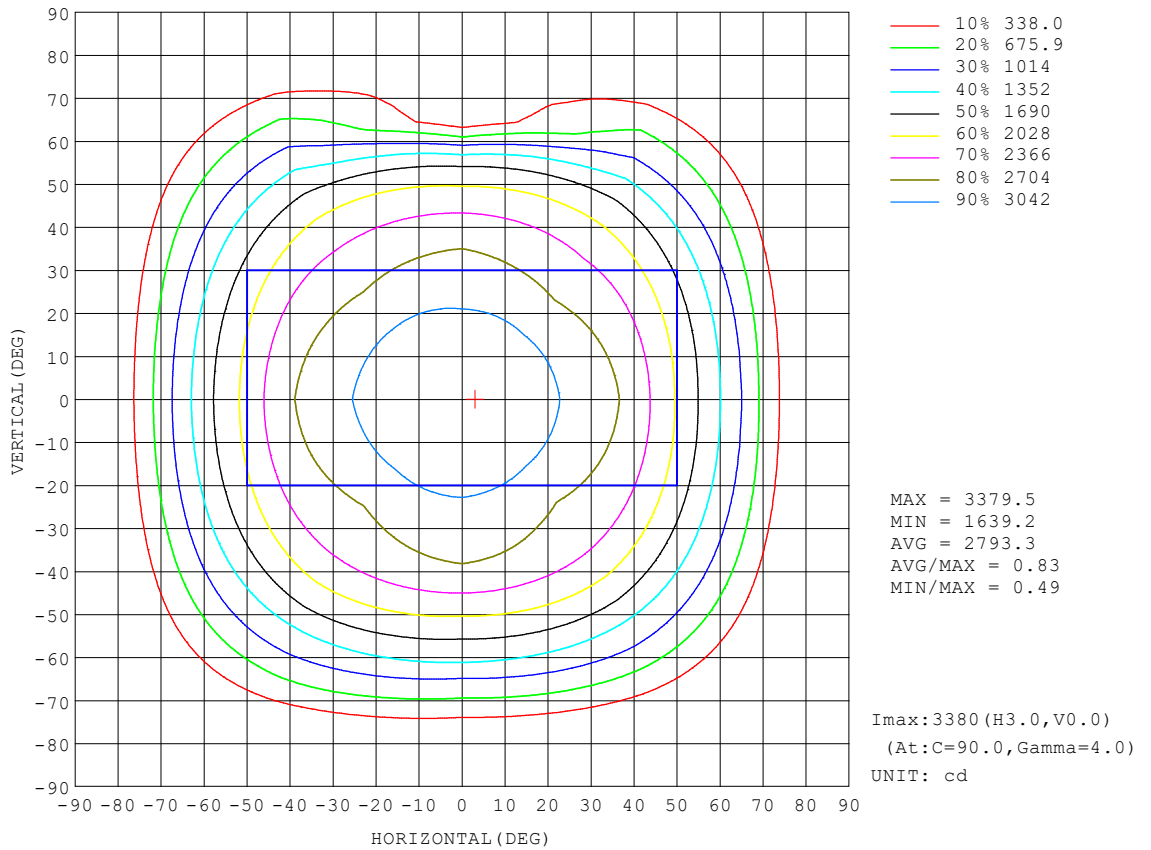


C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 01 November 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.295  
 Humidity: 65.0%  
 Test Distance: 8.250m [K=1.0000]  
 Remarks:



**AAI Figure**

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

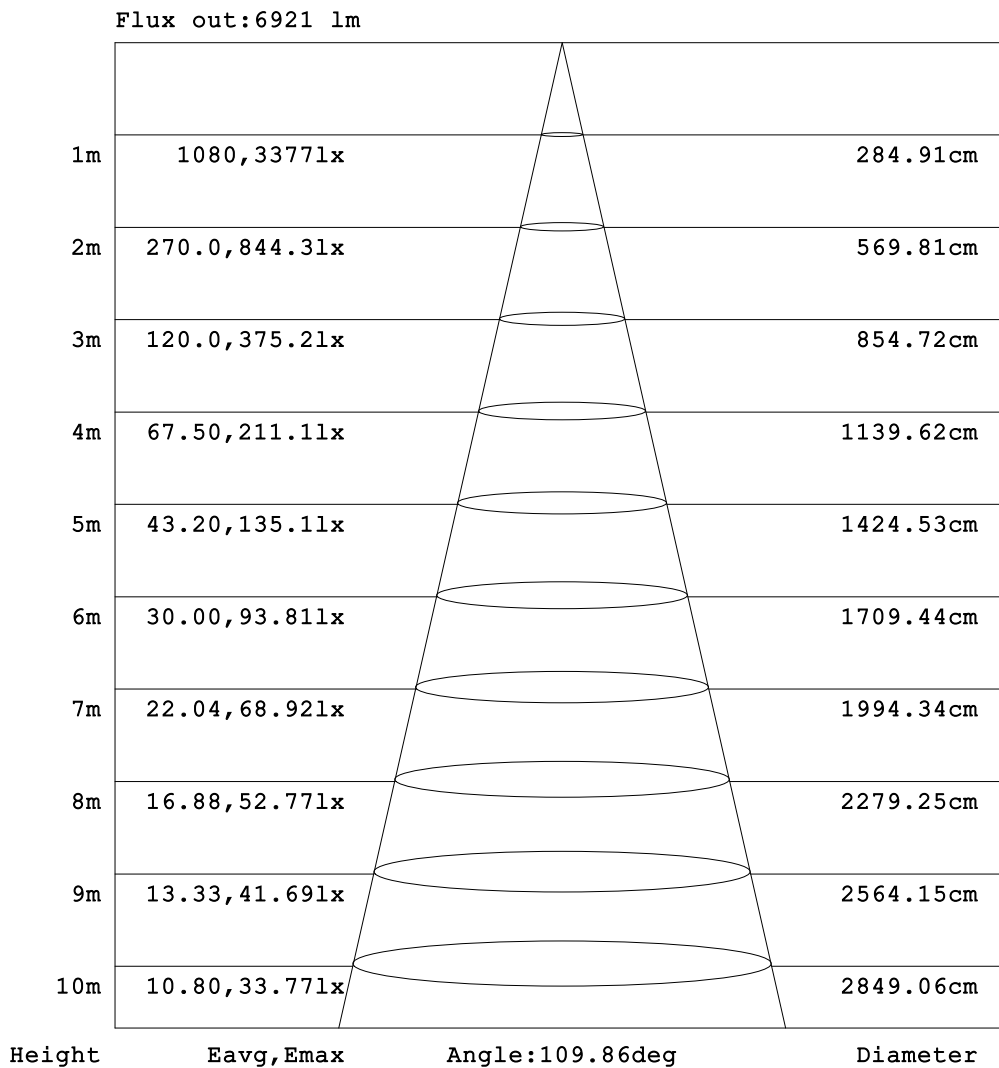


**Note:**The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:01 November 2018

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.295  
 Humidity:65.0%  
 Test Distance:8.250m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

<b>NAME:</b>	<b>TYPE:</b>	<b>WEIGHT:</b>
<b>SPEC.:</b>	<b>DIM.:</b>	<b>SERIAL No.:</b>
<b>MFR.:</b>	<b>SUR.:</b>	<b>Shielding Angle:</b>

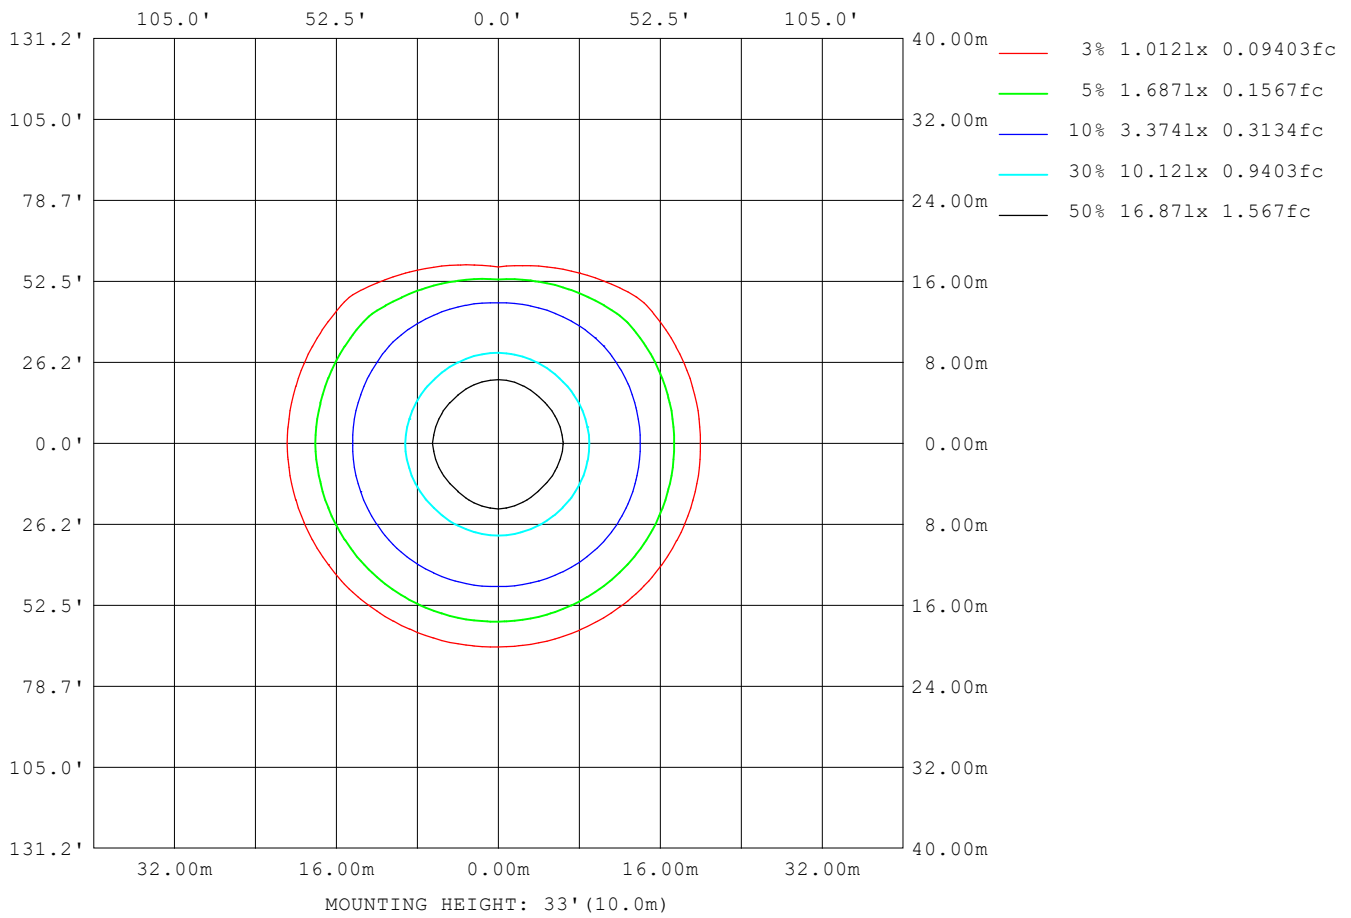

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 01 November 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.295  
 Humidity: 65.0%  
 Test Distance: 8.250m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	261975
L_0~180 (75) av	137165
L_0~180 (85) av	17404
L_90~270 (65) av	124034
L_90~270 (75) av	56526
L_90~270 (85) av	12307
L_45 (65) av	258132
L_45 (75) av	134738
L_45 (85) av	18061

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:01 November 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.295  
 Humidity:65.0%  
 Test Distance:8.250m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

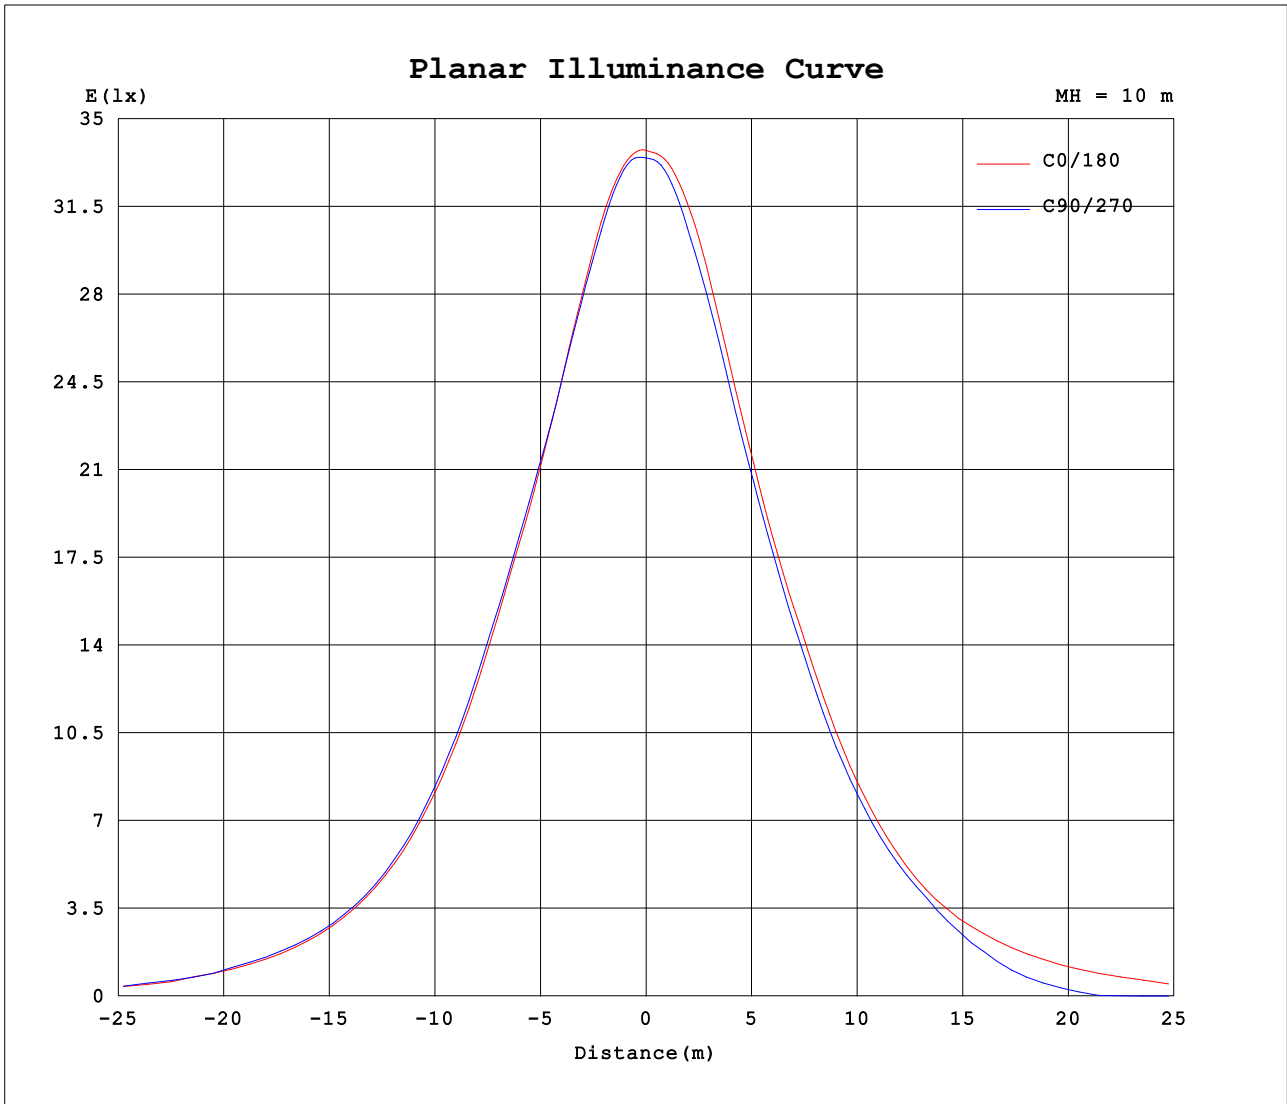

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 01 November 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.295  
 Humidity: 65.0%  
 Test Distance: 8.250m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315										
0	3353	3353	3353	3353	3353	3353	3353	3353										
5	3353	3358	3366	3365	3357	3348	3343	3345										
10	3309	3308	3310	3333	3335	3315	3274	3281										
15	3214	3212	3214	3261	3275	3232	3183	3192										
20	3096	3074	3112	3133	3156	3119	3075	3078										
25	2973	2919	3010	2975	3034	2963	2951	2921										
30	2865	2761	2937	2815	2909	2803	2842	2757										
35	2749	2624	2824	2669	2804	2647	2711	2596										
40	2537	2509	2628	2546	2644	2488	2521	2449										
45	2282	2347	2374	2403	2406	2333	2290	2287										
50	1980	2088	2062	2170	2127	2118	2003	2046										
55	1671	1769	1741	1858	1822	1837	1593	1753										
60	1349	1398	1436	1518	1540	1506	838	1397										
65	1010	1058	1007	1159	1204	1152	41.6	994										
70	611	666	639	814	787	788	13.4	671										
75	274	298	284	372	436	417	8.23	308										
80	67.4	55.9	52.8	101	158	145	2.69	77.1										
85	13.0	14.7	18.2	17.7	17.4	18.4	3.22	12.2										
90	5.09	6.85	7.36	6.73	8.30	8.66	4.26	5.05										
95	6.96	8.02	6.35	7.35	7.02	7.01	6.49	7.56										
100	10.1	10.4	5.74	9.39	10.4	9.95	9.23	10.8										
105	13.7	13.3	7.28	12.1	14.3	13.3	12.1	14.2										
110	17.3	16.4	11.1	15.0	18.2	16.6	15.2	17.4										
115	21.0	19.9	15.9	18.3	22.1	20.0	18.7	20.9										
120	24.8	23.3	20.3	21.6	26.0	23.4	22.4	24.3										
125	28.1	26.5	23.7	24.6	29.7	26.5	26.0	27.4										
130	30.9	29.4	27.1	27.3	32.7	29.3	29.3	30.3										
135	33.3	32.1	30.2	29.9	35.1	31.9	32.3	32.8										
140	35.4	34.5	32.8	32.5	37.1	34.3	34.9	35.0										
145	37.1	36.9	35.1	34.8	38.9	36.5	37.0	36.8										
150	39.0	39.6	37.8	37.0	40.4	38.4	38.7	38.5										
155	41.1	42.1	40.6	39.0	42.2	40.0	40.4	39.8										
160	43.2	44.2	42.3	40.9	44.2	41.7	42.2	41.3										
165	45.7	46.3	44.0	42.7	46.5	43.4	44.4	43.0										
170	48.8	48.2	46.5	44.7	49.0	45.7	46.9	45.1										
175	50.8	49.0	48.8	46.3	50.9	47.6	49.6	46.6										
180	51.5	49.1	50.6	47.6	51.7	49.0	50.7	47.5										

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:01 November 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.295  
 Humidity:65.0%  
 Test Distance:8.250m [K=1.0000]  
 Remarks: