
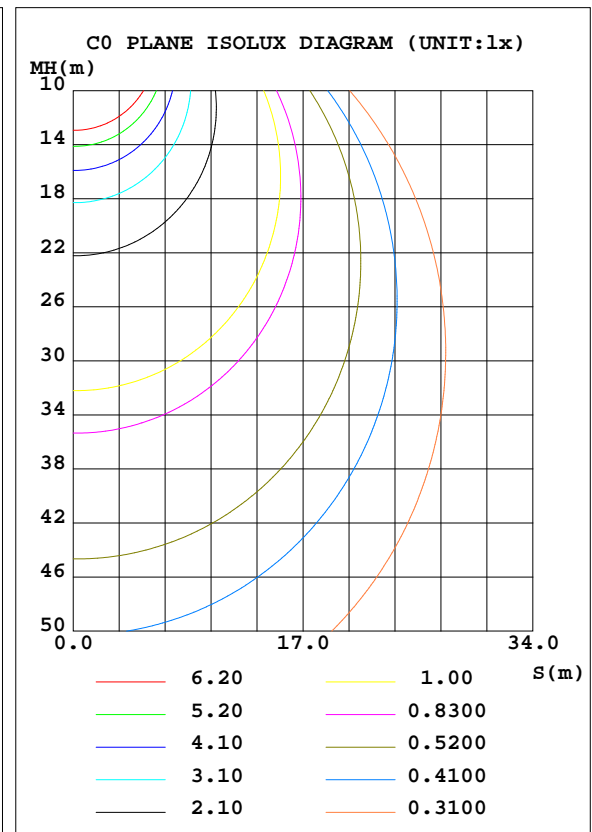


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.9V I:0.1745A P:38.00W PF:0.9473 Lamp Flux:3416.04x1 lm		
NAME: LED waterproof light 36W-6500K	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.55*0.55	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 89.89 lm/W			
MODEL		I _{max} (cd)	1037	S/MH(C0/180)	1.21
NOMINAL POWER(W)	36	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	230.0	TOTAL FLUX(lm)	3416.0	η UP, DN(C0-180)	3.3,47.2
NOMINAL FLUX(lm)	3416.04	CIE CLASS	DIRECT	η UP, DN(C180-360)	3.2,46.4
LAMPS INSIDE	1	η up(%)	6.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down(%)	93.5	CIBSE SHR MAX	1.35

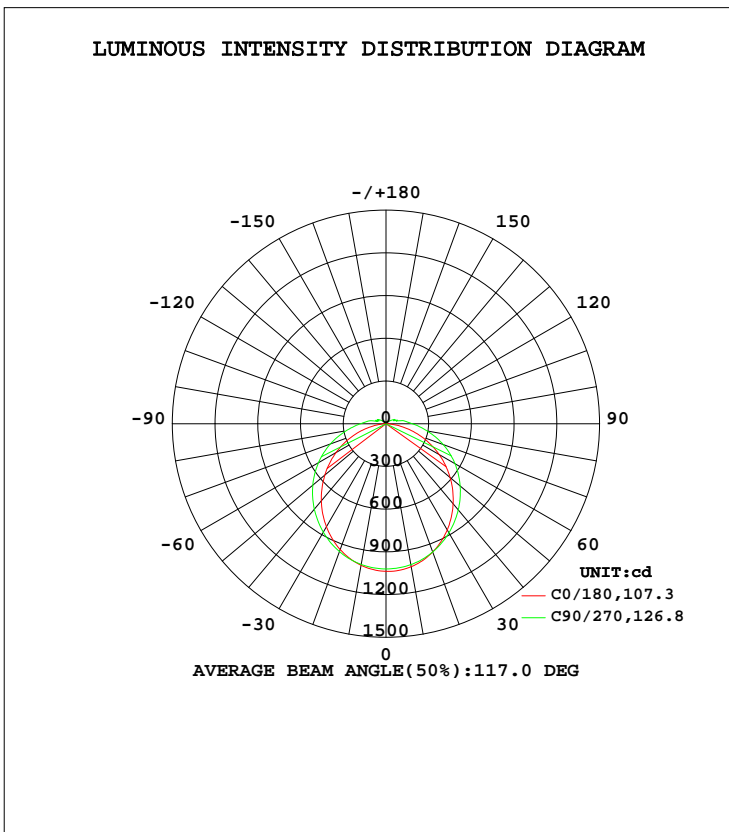

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:12 January 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1020	1011	1005	996.9	1010	1003	1003	1003	0- 10	96.84	96.84	2.83,2.83
20	958.9	959.6	958.8	939.9	940.3	944.5	955.8	951.1	10- 20	277.0	373.9	10.9,10.9
30	860.9	875.3	884.6	852.6	836.7	854.4	880.1	866.6	20- 30	419.3	793.2	23.2,23.2
40	734.1	765.2	789.8	741.8	706.9	740.9	783.2	756.9	30- 40	506.6	1300	38.1,38.1
50	588.1	639.3	680.3	616.9	561.0	613.6	671.2	631.2	40- 50	532.3	1832	53.6,53.6
60	430.1	502.7	558.9	483.2	405.3	477.6	548.3	495.3	50- 60	498.3	2330	68.2,68.2
70	265.3	359.9	427.7	344.8	244.7	337.7	415.7	353.5	60- 70	412.2	2743	80.3,80.3
80	105.9	220.5	293.7	210.5	92.31	204.4	283.5	217.0	70- 80	288.6	3031	88.7,88.7
90	12.38	118.7	186.4	113.0	7.747	109.0	180.0	117.0	80- 90	163.6	3195	93.5,93.5
100	10.52	56.98	126.2	52.43	7.487	50.92	120.2	61.40	90-100	92.17	3287	96.2,96.2
110	9.551	47.07	69.96	45.37	7.687	43.44	70.48	46.44	100-110	49.36	3336	97.7,97.7
120	9.028	25.63	57.30	25.24	8.159	23.90	57.89	25.92	110-120	34.28	3371	98.7,98.7
130	8.709	13.20	30.79	13.71	8.582	11.37	30.63	13.51	120-130	19.76	3390	99.3,99.3
140	8.804	9.131	16.09	9.377	9.121	9.292	15.96	9.221	130-140	10.33	3401	99.6,99.6
150	9.698	9.723	10.42	9.893	10.04	9.942	10.28	9.796	140-150	6.336	3407	99.7,99.7
160	10.62	10.53	10.58	10.66	10.96	10.77	10.62	10.58	150-160	4.754	3412	99.9,99.9
170	11.36	11.23	11.12	11.22	11.57	11.33	11.11	11.17	160-170	3.104	3415	100,100
180	11.72	11.60	11.54	11.49	11.79	11.64	11.56	11.49	170-180	1.087	3416	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1566.6 lm

%lum = 45.9%

%lamp = 45.9%

Conical surface Flux(120deg): 2330.5 lm


%lum = 68.2%

%lamp = 68.2%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:12 January 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

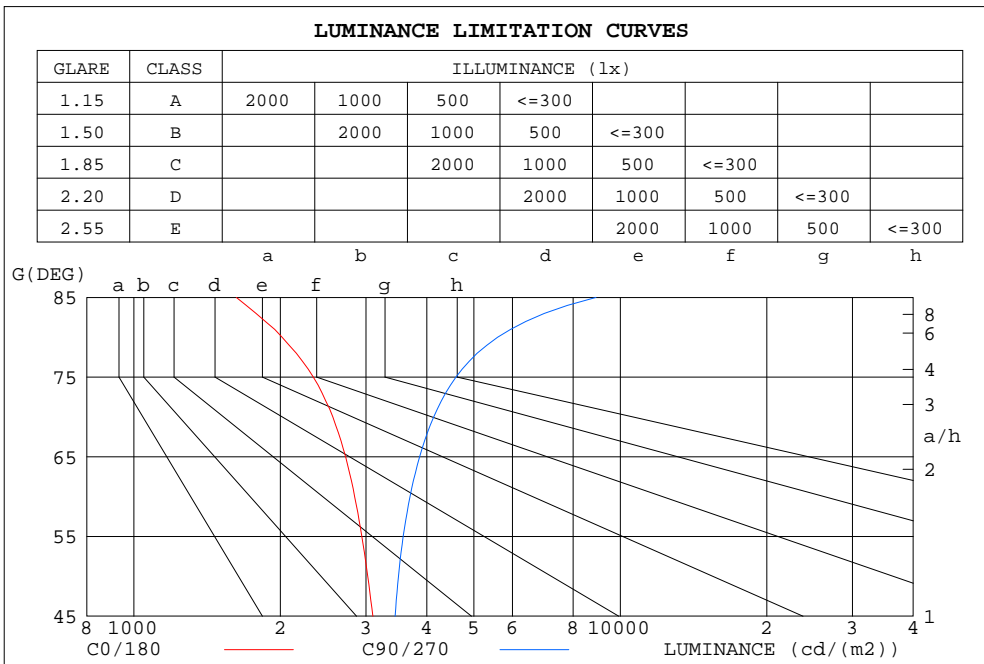


LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1624	8912
80	2017	5591
75	2338	4595
70	2564	4134
65	2724	3867
60	2844	3695
55	2942	3578
50	3025	3499
45	3099	3444

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 12 January 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.14	1.14	1.14	1.08	1.08	1.08	1.02	1.02	1.02	.96	.96	.96	.94
1.0	1.00	.95	.91	.97	.93	.89	.92	.88	.85	.87	.84	.81	.82	.80	.78	.75
2.0	.87	.79	.73	.84	.77	.72	.79	.74	.69	.75	.70	.66	.71	.67	.64	.61
3.0	.76	.67	.60	.73	.66	.59	.70	.63	.57	.66	.60	.55	.62	.58	.54	.51
4.0	.67	.58	.51	.65	.56	.50	.62	.54	.48	.58	.52	.47	.56	.50	.46	.43
5.0	.59	.50	.43	.58	.49	.43	.55	.47	.42	.52	.46	.41	.50	.44	.40	.37
6.0	.53	.44	.38	.52	.43	.37	.50	.42	.36	.47	.41	.35	.45	.39	.35	.32
7.0	.48	.39	.33	.47	.39	.33	.45	.38	.32	.43	.36	.31	.41	.35	.31	.29
8.0	.44	.35	.29	.43	.35	.29	.41	.34	.29	.39	.33	.28	.38	.32	.27	.25
9.0	.40	.32	.26	.39	.32	.26	.38	.31	.26	.36	.30	.25	.35	.29	.25	.23
10.0	.37	.29	.24	.36	.29	.24	.35	.28	.23	.34	.27	.23	.32	.27	.22	.21

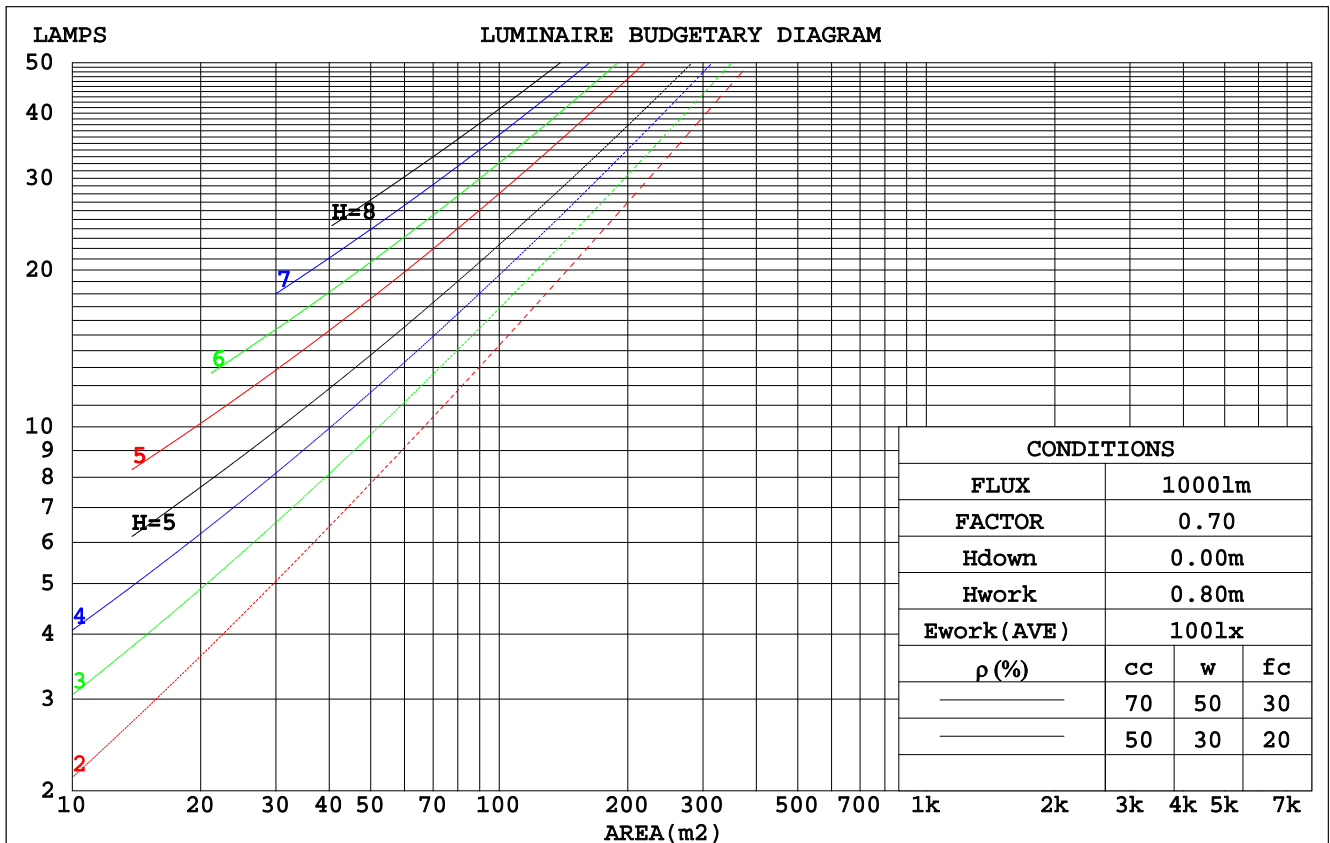

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 12 January 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

WEC AND CCEC

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.349	.198	.063	.340	.194	.062	.323	.185	.059	.307	.177	.057	.292	.170	.055	
2.0	.314	.172	.053	.306	.168	.052	.290	.161	.050	.276	.155	.048	.263	.149	.047	
3.0	.284	.151	.045	.277	.148	.045	.263	.143	.043	.250	.137	.042	.239	.132	.041	
4.0	.259	.134	.040	.252	.132	.039	.240	.127	.038	.229	.123	.037	.218	.118	.036	
5.0	.237	.121	.035	.231	.119	.035	.220	.115	.034	.210	.111	.033	.200	.107	.032	
6.0	.218	.109	.031	.213	.108	.031	.203	.104	.030	.194	.101	.030	.185	.098	.029	
7.0	.202	.100	.028	.198	.098	.028	.189	.095	.027	.180	.092	.027	.172	.090	.026	
8.0	.188	.092	.026	.184	.091	.026	.176	.088	.025	.168	.085	.025	.161	.083	.024	
9.0	.176	.085	.024	.172	.084	.024	.165	.081	.023	.158	.079	.023	.151	.077	.022	
10.0	.165	.079	.022	.162	.078	.022	.155	.076	.021	.148	.074	.021	.142	.072	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.240	.240	.240	.205	.205	.205	.140	.140	.140	.080	.080	.080	.026	.026	.026	
1.0	.233	.206	.181	.199	.176	.156	.136	.121	.108	.078	.070	.063	.025	.023	.020	
2.0	.225	.182	.145	.193	.157	.126	.132	.108	.088	.076	.063	.051	.024	.020	.017	
3.0	.218	.165	.123	.186	.142	.106	.128	.099	.075	.074	.058	.044	.024	.019	.014	
4.0	.210	.152	.107	.180	.131	.093	.124	.091	.066	.072	.054	.039	.023	.017	.013	
5.0	.202	.142	.097	.174	.123	.084	.120	.086	.060	.069	.050	.035	.022	.016	.012	
6.0	.195	.133	.089	.167	.116	.078	.115	.081	.055	.067	.048	.033	.022	.016	.011	
7.0	.188	.127	.084	.162	.110	.073	.112	.077	.052	.065	.045	.031	.021	.015	.010	
8.0	.181	.121	.079	.156	.105	.069	.108	.074	.049	.063	.043	.029	.020	.014	.010	
9.0	.175	.116	.076	.151	.101	.066	.104	.071	.047	.061	.042	.028	.020	.014	.009	
10.0	.169	.112	.074	.146	.097	.064	.101	.068	.046	.059	.040	.027	.019	.013	.009	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:12 January 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.1	17.6	16.5	17.9	18.3	17.2	18.7	17.5	19.0	19.3
3H	17.6	19.0	18.0	19.3	19.7	19.3	20.7	19.7	21.0	21.4
4H	18.2	19.5	18.6	19.9	20.3	20.4	21.7	20.8	22.1	22.5
6H	18.6	19.8	19.0	20.2	20.7	21.5	22.7	21.9	23.1	23.6
8H	18.7	19.9	19.2	20.3	20.8	22.1	23.3	22.5	23.7	24.1
12H	18.8	19.9	19.2	20.4	20.8	22.7	23.9	23.2	24.3	24.7
4H 2H	17.0	18.3	17.4	18.6	19.0	17.8	19.1	18.2	19.4	19.8
3H	18.7	19.8	19.1	20.2	20.7	20.1	21.3	20.6	21.7	22.1
4H	19.4	20.5	19.9	20.9	21.4	21.4	22.4	21.9	22.9	23.4
6H	20.0	20.9	20.5	21.4	21.9	22.7	23.6	23.2	24.1	24.6
8H	20.2	21.0	20.7	21.5	22.0	23.4	24.3	23.9	24.8	25.3
12H	20.3	21.1	20.8	21.6	22.1	24.2	25.0	24.7	25.5	26.0
8H 4H	20.0	20.9	20.5	21.4	21.9	21.7	22.6	22.2	23.0	23.6
6H	20.8	21.6	21.4	22.1	22.7	23.3	24.0	23.8	24.5	25.1
8H	21.2	21.8	21.7	22.3	22.9	24.1	24.8	24.7	25.3	25.9
12H	21.4	22.0	22.0	22.5	23.1	25.2	25.7	25.7	26.3	26.9
12H 4H	20.2	21.0	20.7	21.5	22.0	21.7	22.5	22.2	23.0	23.6
6H	21.1	21.8	21.7	22.3	22.9	23.3	24.0	23.9	24.5	25.1
8H	21.5	22.1	22.1	22.7	23.3	24.3	24.9	24.9	25.4	26.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.4					+ 0.2 / - 0.3				

CIE Pub.117 Corrected 3416 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.3)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:12 January 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	54	42	34	53	41	34	51	41	34	27
0.80	63	51	43	62	50	43	60	49	42	35
1.00	71	59	51	70	59	51	67	60	50	43
1.25	78	67	59	76	66	58	73	64	57	49
1.50	83	72	65	81	71	64	78	69	62	54
2.00	90	81	73	88	79	72	84	76	70	61
2.50	94	86	79	92	84	77	87	80	75	65
3.00	98	90	84	95	88	82	90	84	79	69
4.00	102	96	90	99	93	88	94	89	85	74
5.00	105	99	94	102	97	92	96	92	88	77
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 12 January 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

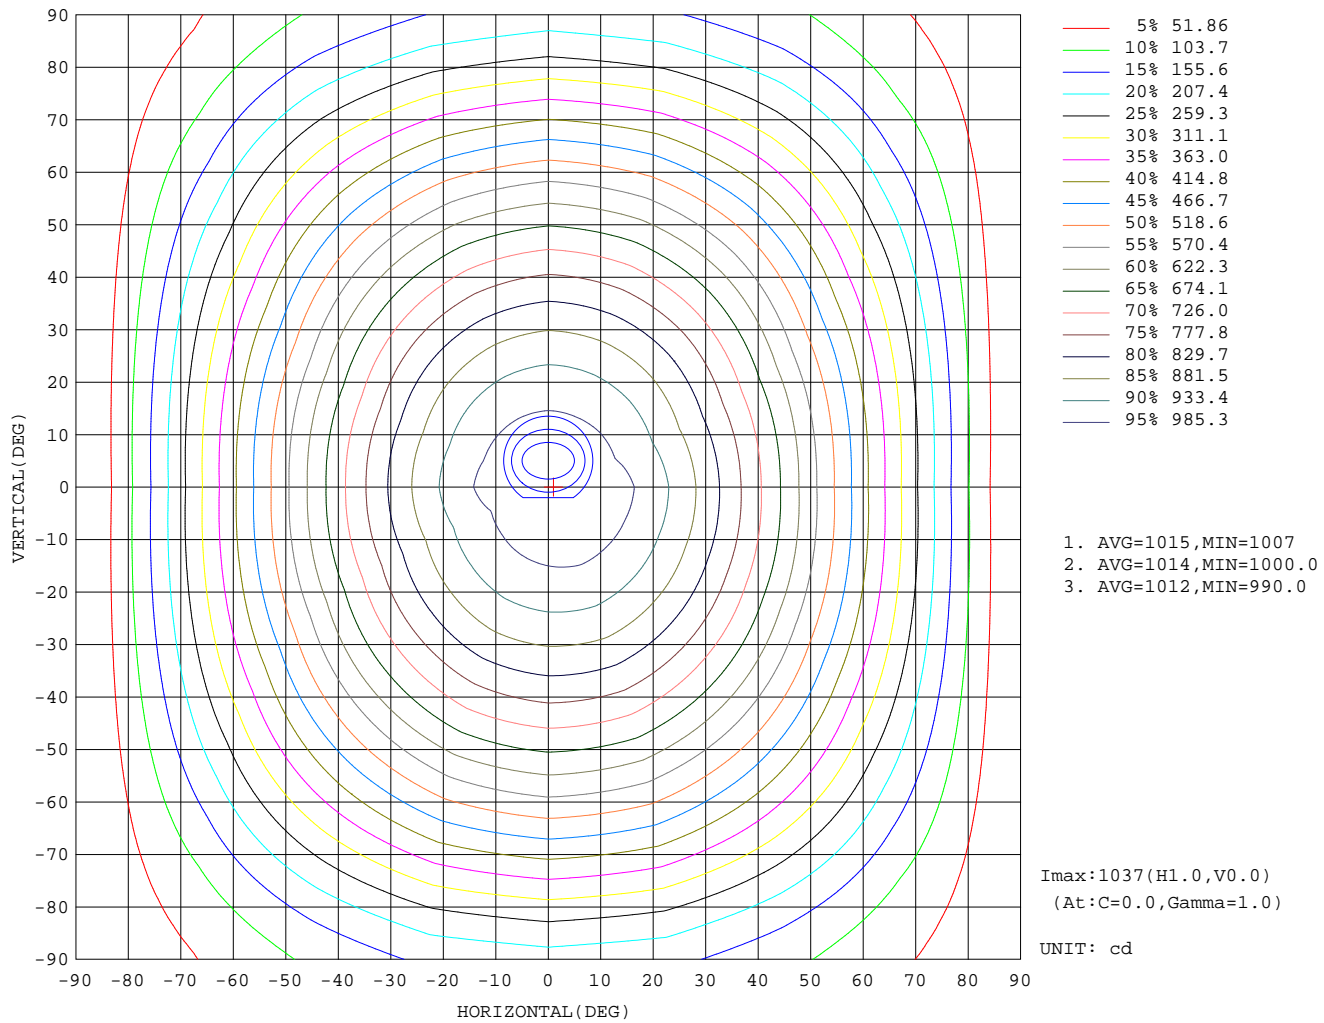

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 12 January 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

AAI Figure

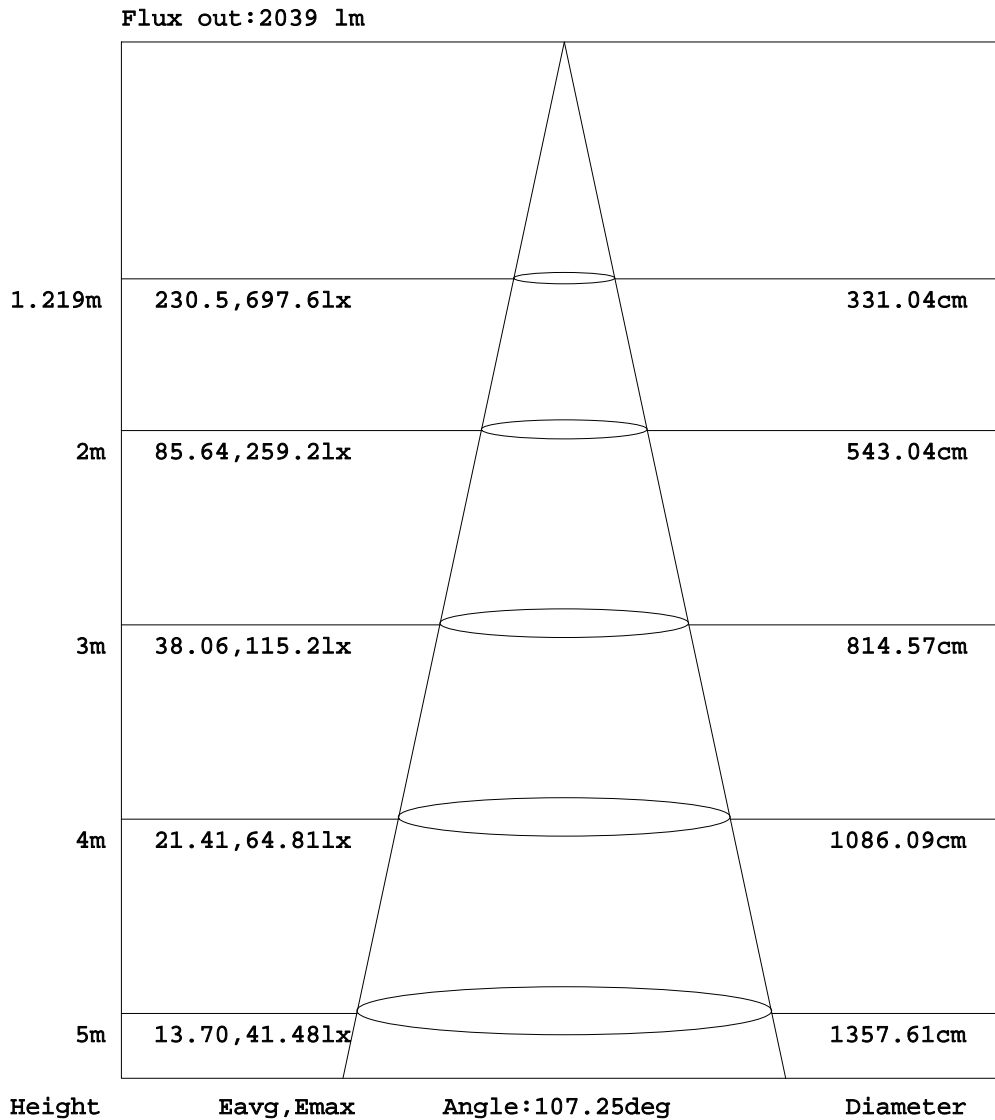


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 12 January 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

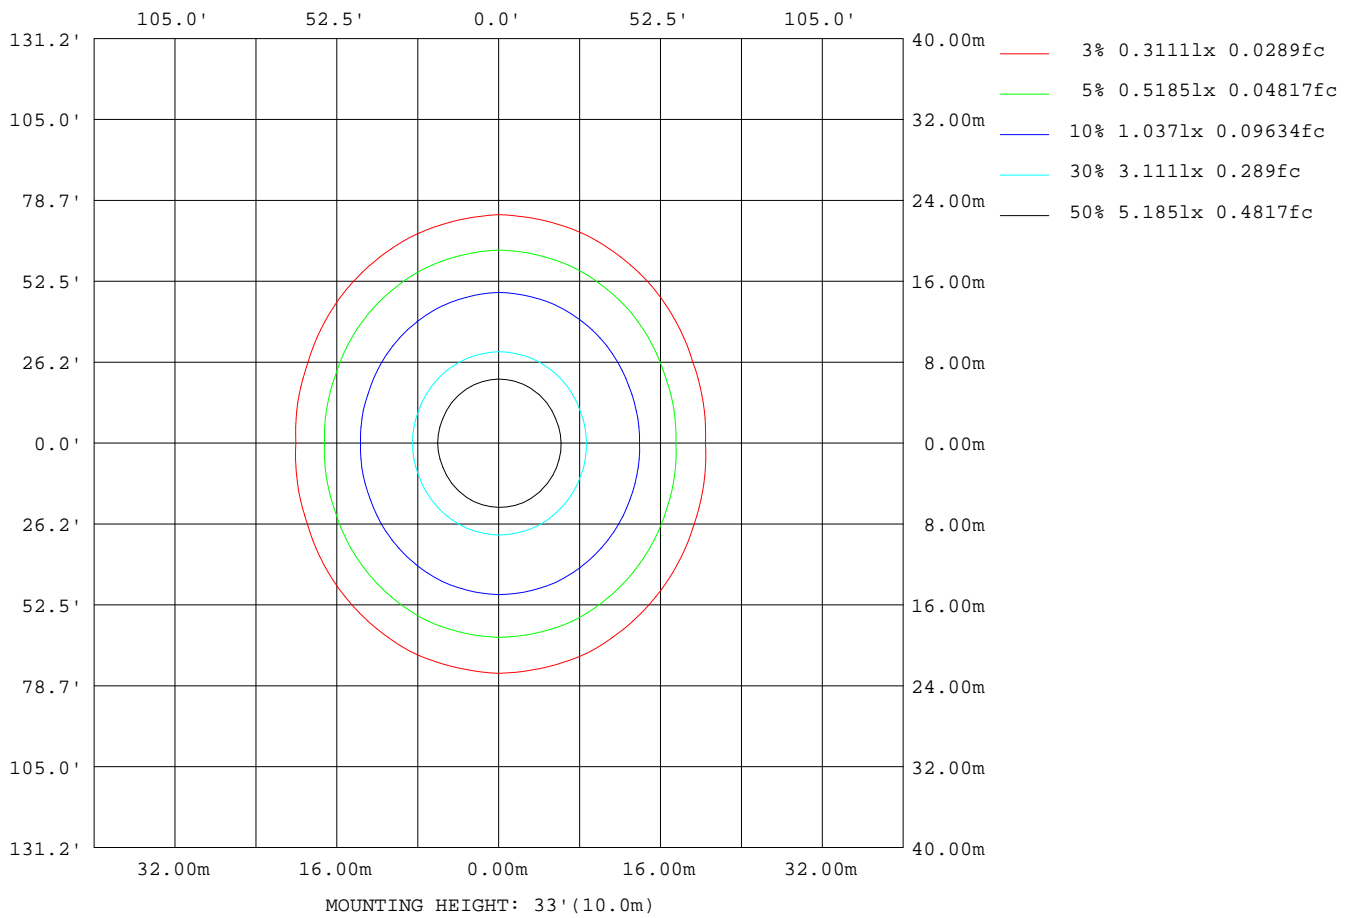

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 12 January 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:229.9V I:0.1745A P:38.00W PF:0.9473 Lamp Flux:3416.04x1 lm		
NAME: LED waterproof light 36W-6500K	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.55*0.55	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2634
L_0~180(75)av	2231
L_0~180(85)av	1439
L_90~270(65)av	3821
L_90~270(75)av	4521
L_90~270(85)av	8751
L_45(65)av	3282
L_45(75)av	3566
L_45(85)av	5917

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:12 January 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

Planar Illuminance Curve

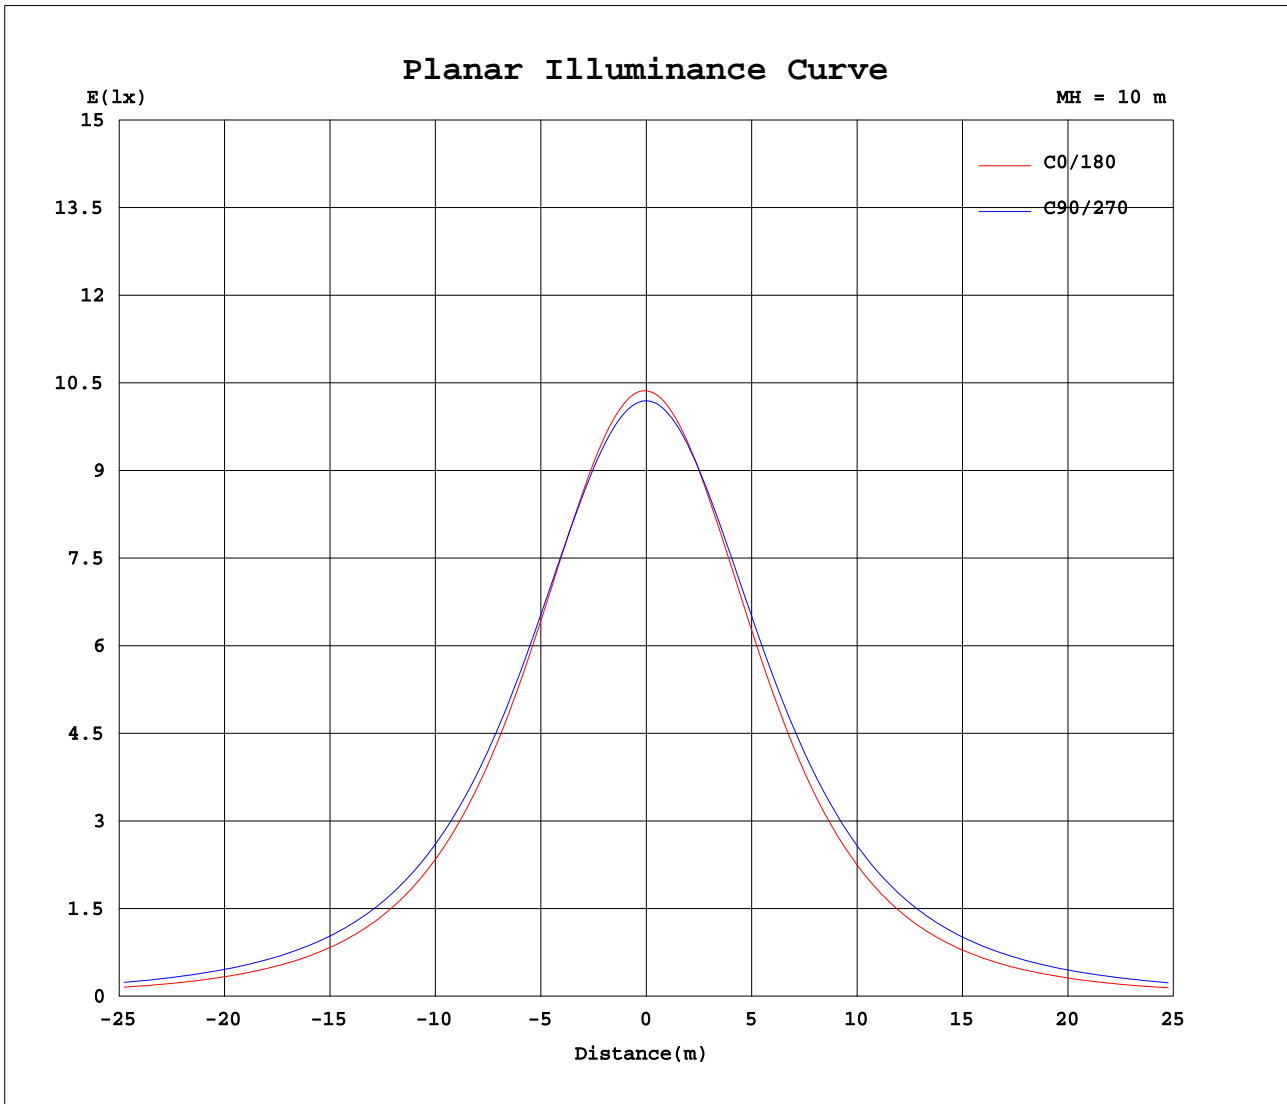

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 12 January 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1037	1030	1026	1023	1020	1018	1019	1020	1037	1030	1026	1023	1020	1018	1019	1020			
5	1034	1028	1024	1020	1016	1013	1012	1012	1029	1022	1019	1017	1015	1014	1015	1016			
10	1020	1014	1011	1009	1005	1001	997	994	1010	1003	1003	1003	1003	1002	1003	1002			
15	995	991	990	990	985	980	972	966	980	975	978	981	983	982	982	979			
20	959	957	960	963	959	952	940	930	940	937	944	951	956	954	951	945			
25	914	915	921	928	925	916	900	885	892	890	903	914	921	918	912	903			
30	861	865	875	887	885	874	853	833	837	837	854	870	880	876	867	852			
35	800	807	823	840	839	826	800	775	774	777	800	821	833	828	814	796			
40	734	744	765	788	790	774	742	711	707	713	741	767	783	776	757	733			
45	663	677	704	733	737	719	681	644	635	644	678	711	729	720	695	666			
50	588	605	639	674	680	661	617	574	561	573	614	651	671	660	631	595			
55	511	532	572	612	621	600	551	502	484	500	546	588	611	598	564	522			
60	430	456	503	548	559	537	483	428	405	425	478	524	548	534	495	447			
65	348	379	432	482	494	471	414	354	325	350	408	457	483	467	425	371			
70	265	302	360	414	428	405	345	280	245	276	338	389	416	399	354	295			
75	183	226	289	344	360	337	276	209	166	202	269	322	348	331	283	220			
80	106	155	221	278	294	272	211	141	92.3	134	204	258	284	265	217	149			
85	42.8	94.1	162	219	235	214	154	83.8	33.1	79.4	149	202	226	208	159	90.8			
90	12.4	56.5	119	171	186	168	113	49.8	7.75	47.1	109	157	180	162	117	54.7			
95	11.3	38.7	93.4	137	151	135	89.1	32.2	7.53	28.8	84.9	126	145	130	91.0	38.7			
100	10.5	26.6	57.0	113	126	111	52.4	23.5	7.49	21.7	50.9	102	120	106	61.4	25.7			
105	9.97	20.6	45.9	70.6	73.8	69.7	42.4	18.3	7.54	16.8	41.3	55.1	63.4	59.5	46.0	20.6			
110	9.55	15.2	47.1	55.1	70.0	54.1	45.4	13.8	7.69	12.6	43.4	49.6	70.5	52.3	46.4	15.5			
115	9.25	11.4	34.2	65.2	71.1	63.5	33.3	10.6	7.92	8.42	33.1	60.3	63.3	62.2	35.3	11.6			
120	9.03	8.92	25.6	47.9	57.3	46.9	25.2	8.42	8.16	8.17	23.9	47.2	57.9	48.4	25.9	9.47			
125	8.82	8.58	18.6	34.7	41.2	34.4	18.9	8.24	8.34	8.17	17.7	33.4	41.6	34.1	19.0	8.88			
130	8.71	8.44	13.2	25.7	30.8	25.7	13.7	8.36	8.58	8.42	11.4	24.5	30.6	25.1	13.5	8.70			
135	8.71	8.44	9.52	18.3	22.4	18.5	10.2	8.53	8.85	8.69	9.58	16.7	22.0	17.7	10.4	8.68			
140	8.80	8.60	9.13	13.1	16.1	13.4	9.38	8.78	9.12	8.99	9.29	12.4	16.0	13.2	9.22	8.77			
145	9.16	9.08	9.41	10.3	11.2	10.4	9.59	9.25	9.55	9.47	9.59	10.3	11.5	10.4	9.49	9.20			
150	9.70	9.61	9.72	10.2	10.4	10.2	9.89	9.75	10.0	9.92	9.94	10.1	10.3	10.1	9.80	9.64			
155	10.2	10.1	10.1	10.3	10.4	10.3	10.3	10.2	10.5	10.4	10.3	10.3	10.4	10.3	10.2	10.1			
160	10.6	10.5	10.5	10.6	10.6	10.6	10.7	10.6	11.0	10.8	10.8	10.7	10.6	10.6	10.6	10.5			
165	11.0	11.0	10.9	10.9	10.9	11.0	11.0	11.0	11.3	11.2	11.1	11.0	10.9	10.9	10.9	10.9			
170	11.4	11.3	11.2	11.2	11.1	11.2	11.2	11.3	11.6	11.4	11.3	11.3	11.1	11.1	11.2	11.2			
175	11.6	11.6	11.5	11.4	11.4	11.4	11.4	11.4	11.7	11.6	11.5	11.4	11.3	11.3	11.4	11.4			
180	11.7	11.7	11.6	11.5	11.5	11.4	11.5	11.5	11.8	11.6	11.6	11.5	11.6	11.4	11.5	11.5			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 12 January 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks: