
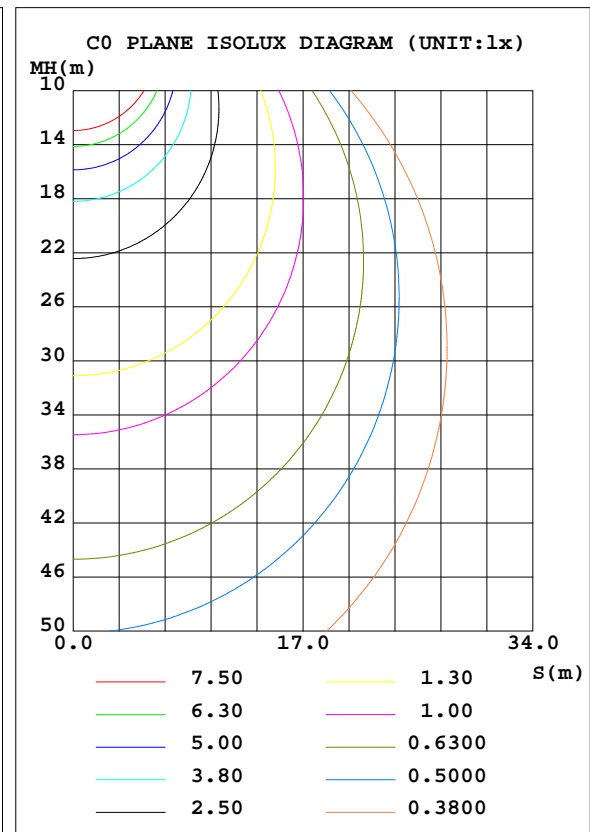


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.6V I:0.2214A P:47.58W PF:0.9363 Lamp Flux:4377.71x1 lm		
NAME: LED Emergency waterproof light 48W-6500K	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.5*0.1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 92.00 lm/W			
MODEL		I _{max} (cd)	1293	S/MH(C0/180)	1.24
NOMINAL POWER(W)	48	LOR(%)	100.0	S/MH(C90/270)	1.40
RATED VOLTAGE(V)	230.0	TOTAL FLUX(lm)	4377.7	η UP, DN(C0-180)	3.0,42.4
NOMINAL FLUX(lm)	4377.71	CIE CLASS	DIRECT	η UP, DN(C180-360)	4.7,50.0
LAMPS INSIDE	1	η up(%)	7.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down(%)	92.3	CIBSE SHR MAX	1.35

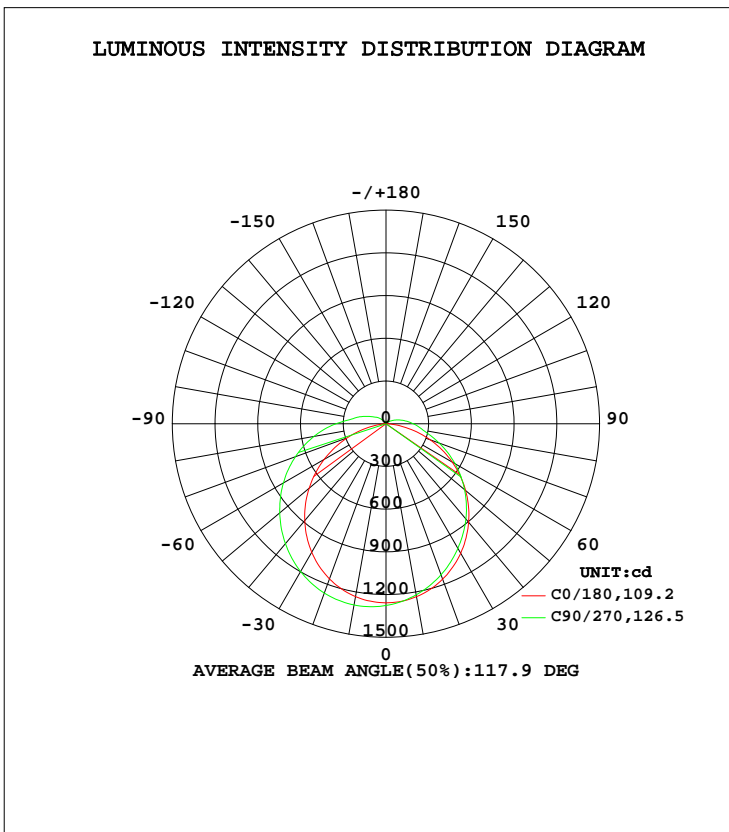

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:27 May 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1233	1182	1220	1272	1232	1272	1293	1252	0- 10	119.8	119.8	2.74,2.74
20	1162	1078	1129	1213	1160	1250	1266	1177	10- 20	343.4	463.3	10.6,10.6
30	1050	944.3	1011	1114	1043	1183	1199	1064	20- 30	521.7	985.0	22.5,22.5
40	903.3	788.9	873.0	982.7	887.8	1078	1099	922.3	30- 40	633.4	1618	37,37
50	730.2	620.5	720.6	827.9	705.0	940.6	974.0	761.3	40- 50	668.2	2287	52.2,52.2
60	537.0	446.0	559.4	660.0	502.2	782.4	832.2	591.4	50- 60	626.9	2913	66.6,66.6
70	330.1	279.6	398.7	486.4	288.8	615.1	676.9	418.1	60- 70	521.0	3434	78.5,78.5
80	123.5	162.6	266.7	318.7	92.22	447.8	513.8	255.7	70- 80	374.9	3809	87,87
90	9.137	99.35	192.3	184.8	6.067	289.3	350.7	147.4	80- 90	233.3	4043	92.3,92.3
100	7.258	53.35	130.3	119.6	7.067	159.1	226.8	91.66	90-100	139.6	4182	95.5,95.5
110	8.546	23.46	80.46	71.09	8.027	103.3	154.1	52.85	100-110	83.86	4266	97.5,97.5
120	9.705	14.35	42.38	34.25	8.630	56.64	96.47	26.81	110-120	47.92	4314	98.5,98.5
130	10.81	13.70	18.14	16.26	10.30	32.63	62.91	15.08	120-130	26.44	4341	99.2,99.2
140	12.05	13.72	16.00	13.88	11.79	18.23	30.92	14.98	130-140	14.85	4355	99.5,99.5
150	13.46	14.50	15.04	14.02	13.35	14.37	15.95	15.10	140-150	9.572	4365	99.7,99.7
160	14.69	15.24	15.09	14.28	14.66	15.16	16.21	15.54	150-160	6.827	4372	99.9,99.9
170	15.66	15.81	15.82	15.16	15.63	15.74	16.22	16.00	160-170	4.351	4376	100,100
180	16.05	16.00	16.22	15.81	16.10	16.03	16.14	15.84	170-180	1.509	4378	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1953 lm

%lum = 44.6%

%lamp = 44.6%

Conical surface Flux(120deg): 2913.5 lm


%lum = 66.6%

%lamp = 66.6%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:27 May 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

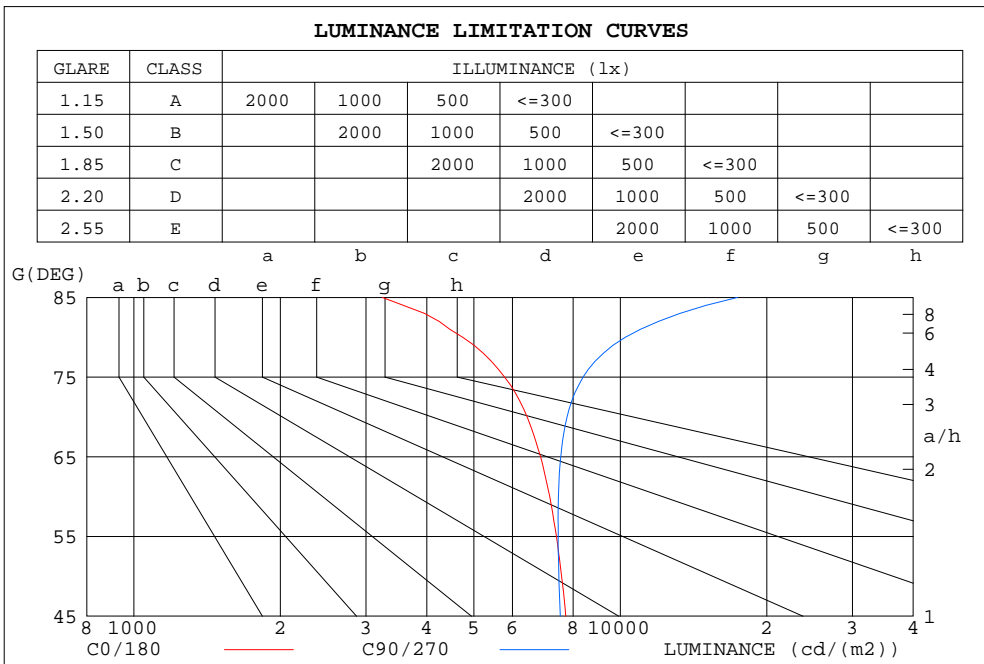


LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3241	17409
80	4743	10240
75	5784	8380
70	6435	7771
65	6856	7545
60	7160	7458
55	7391	7451
50	7574	7474
45	7726	7528

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 27 May 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.95	.95	.95	.92
1.0	.00	.95	.90	.97	.92	.88	.91	.87	.84	.86	.83	.80	.81	.78	.76	.73
2.0	.86	.78	.72	.83	.77	.71	.79	.73	.68	.74	.69	.65	.70	.66	.63	.60
3.0	.75	.66	.59	.73	.65	.58	.69	.62	.56	.65	.59	.54	.61	.57	.52	.50
4.0	.66	.57	.50	.64	.56	.49	.61	.53	.48	.57	.51	.46	.54	.49	.45	.42
5.0	.59	.50	.43	.57	.49	.42	.54	.47	.41	.51	.45	.40	.49	.43	.39	.36
6.0	.53	.44	.37	.52	.43	.37	.49	.41	.36	.46	.40	.35	.44	.38	.34	.32
7.0	.48	.39	.33	.47	.38	.32	.44	.37	.31	.42	.36	.31	.40	.34	.30	.28
8.0	.44	.35	.29	.43	.34	.29	.41	.33	.28	.39	.32	.27	.37	.31	.27	.25
9.0	.40	.32	.26	.39	.31	.26	.37	.30	.25	.36	.29	.25	.34	.28	.24	.22
10.0	.37	.29	.23	.36	.28	.23	.34	.28	.23	.33	.27	.22	.32	.26	.22	.20

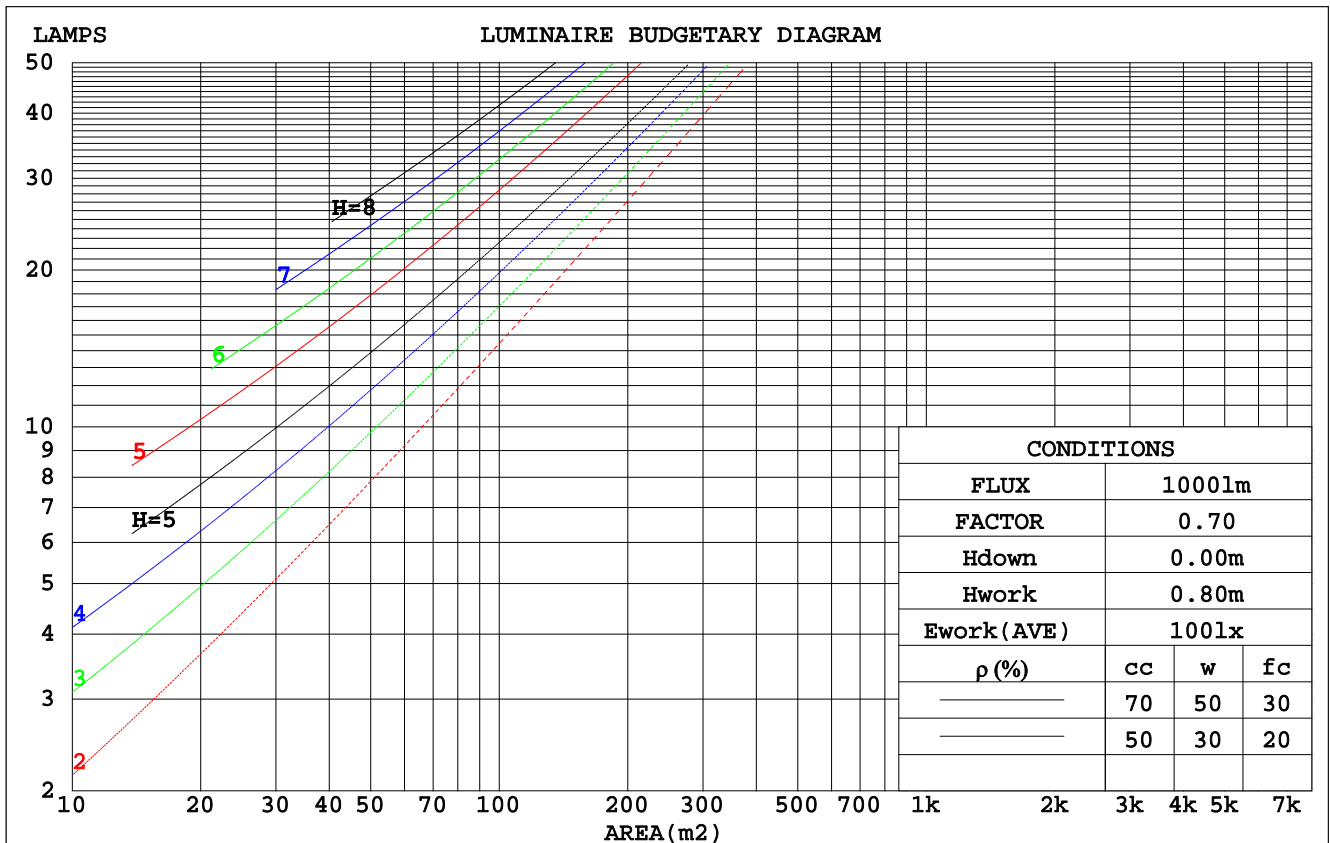

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 27 May 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

WEC AND CCEC

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.355	.202	.064	.346	.197	.063	.328	.188	.060	.312	.180	.058	.296	.172	.055	
2.0	.317	.174	.053	.308	.170	.052	.293	.163	.051	.278	.156	.049	.264	.149	.047	
3.0	.286	.152	.046	.278	.149	.045	.264	.143	.044	.251	.137	.042	.239	.132	.041	
4.0	.260	.135	.040	.253	.132	.039	.240	.127	.038	.228	.123	.037	.217	.118	.036	
5.0	.238	.121	.035	.232	.119	.035	.220	.115	.034	.210	.111	.033	.199	.107	.032	
6.0	.219	.110	.031	.214	.108	.031	.203	.104	.030	.193	.101	.030	.184	.097	.029	
7.0	.203	.100	.028	.198	.099	.028	.188	.095	.027	.180	.092	.027	.171	.089	.026	
8.0	.189	.092	.026	.184	.091	.026	.176	.088	.025	.168	.085	.024	.160	.082	.024	
9.0	.176	.085	.024	.172	.084	.024	.164	.081	.023	.157	.079	.023	.150	.076	.022	
10.0	.165	.079	.022	.161	.078	.022	.154	.076	.021	.148	.073	.021	.141	.071	.020	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.249	.249	.249	.213	.213	.213	.145	.145	.145	.083	.083	.083	.027	.027	.027	
1.0	.242	.215	.190	.207	.184	.163	.142	.127	.113	.082	.073	.066	.026	.024	.021	
2.0	.235	.191	.154	.201	.164	.133	.138	.114	.093	.079	.066	.054	.025	.021	.018	
3.0	.227	.174	.132	.195	.150	.114	.134	.104	.080	.077	.061	.047	.025	.020	.015	
4.0	.219	.161	.116	.188	.139	.101	.129	.097	.071	.075	.057	.042	.024	.018	.014	
5.0	.212	.151	.106	.182	.131	.092	.125	.091	.065	.073	.054	.039	.023	.017	.013	
6.0	.204	.143	.099	.176	.124	.086	.121	.086	.061	.070	.051	.036	.023	.017	.012	
7.0	.197	.136	.093	.170	.118	.081	.117	.083	.057	.068	.049	.034	.022	.016	.011	
8.0	.191	.130	.089	.164	.113	.077	.114	.079	.055	.066	.047	.033	.021	.015	.011	
9.0	.184	.125	.085	.159	.109	.075	.110	.076	.053	.064	.045	.032	.021	.015	.010	
10.0	.179	.121	.083	.154	.105	.072	.107	.074	.051	.062	.044	.031	.020	.014	.010	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:27 May 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.3	19.7	18.7	20.1	20.4	18.2	19.7	18.6	20.0	20.4
3H	19.8	21.1	20.2	21.5	21.9	20.0	21.4	20.5	21.8	22.2
4H	20.4	21.7	20.8	22.0	22.5	21.0	22.3	21.4	22.7	23.1
6H	20.7	22.0	21.2	22.4	22.8	22.1	23.3	22.5	23.7	24.2
8H	20.8	22.0	21.3	22.5	22.9	22.7	23.9	23.2	24.3	24.8
12H	20.9	22.0	21.4	22.5	22.9	23.4	24.6	23.9	25.0	25.5
4H 2H	18.7	20.0	19.1	20.4	20.8	18.6	19.9	19.1	20.3	20.7
3H	20.4	21.5	20.8	21.9	22.4	20.6	21.8	21.1	22.2	22.7
4H	21.1	22.1	21.5	22.6	23.1	21.7	22.7	22.2	23.2	23.7
6H	21.6	22.5	22.1	23.0	23.5	23.0	23.9	23.5	24.4	24.9
8H	21.7	22.6	22.3	23.1	23.7	23.7	24.6	24.2	25.1	25.6
12H	21.8	22.6	22.4	23.1	23.7	24.6	25.4	25.2	26.0	26.5
8H 4H	21.3	22.2	21.8	22.7	23.2	21.9	22.8	22.4	23.3	23.8
6H	22.0	22.7	22.6	23.3	23.9	23.4	24.1	23.9	24.7	25.2
8H	22.3	22.9	22.8	23.5	24.1	24.3	25.0	24.9	25.5	26.1
12H	22.5	23.0	23.1	23.6	24.3	25.4	26.0	26.0	26.6	27.2
12H 4H	21.4	22.2	21.9	22.7	23.3	21.9	22.7	22.5	23.2	23.8
6H	22.2	22.8	22.7	23.4	24.0	23.5	24.1	24.0	24.7	25.3
8H	22.5	23.1	23.1	23.7	24.3	24.5	25.0	25.0	25.6	26.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
2.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4				

CIE Pub.117 Corrected 4378 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.1)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:27 May 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	53	41	34	52	41	34	51	40	33	27
0.80	62	50	42	61	50	42	59	48	42	34
1.00	70	58	50	69	58	50	66	59	49	42
1.25	77	66	58	76	65	57	72	63	56	48
1.50	82	71	63	80	70	63	77	68	61	53
2.00	89	80	72	87	78	71	83	75	69	60
2.50	94	85	77	91	83	76	86	79	74	64
3.00	97	89	82	94	87	81	89	83	78	68
4.00	102	95	89	99	92	87	93	88	84	72
5.00	104	98	93	101	96	91	95	91	87	76
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 27 May 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

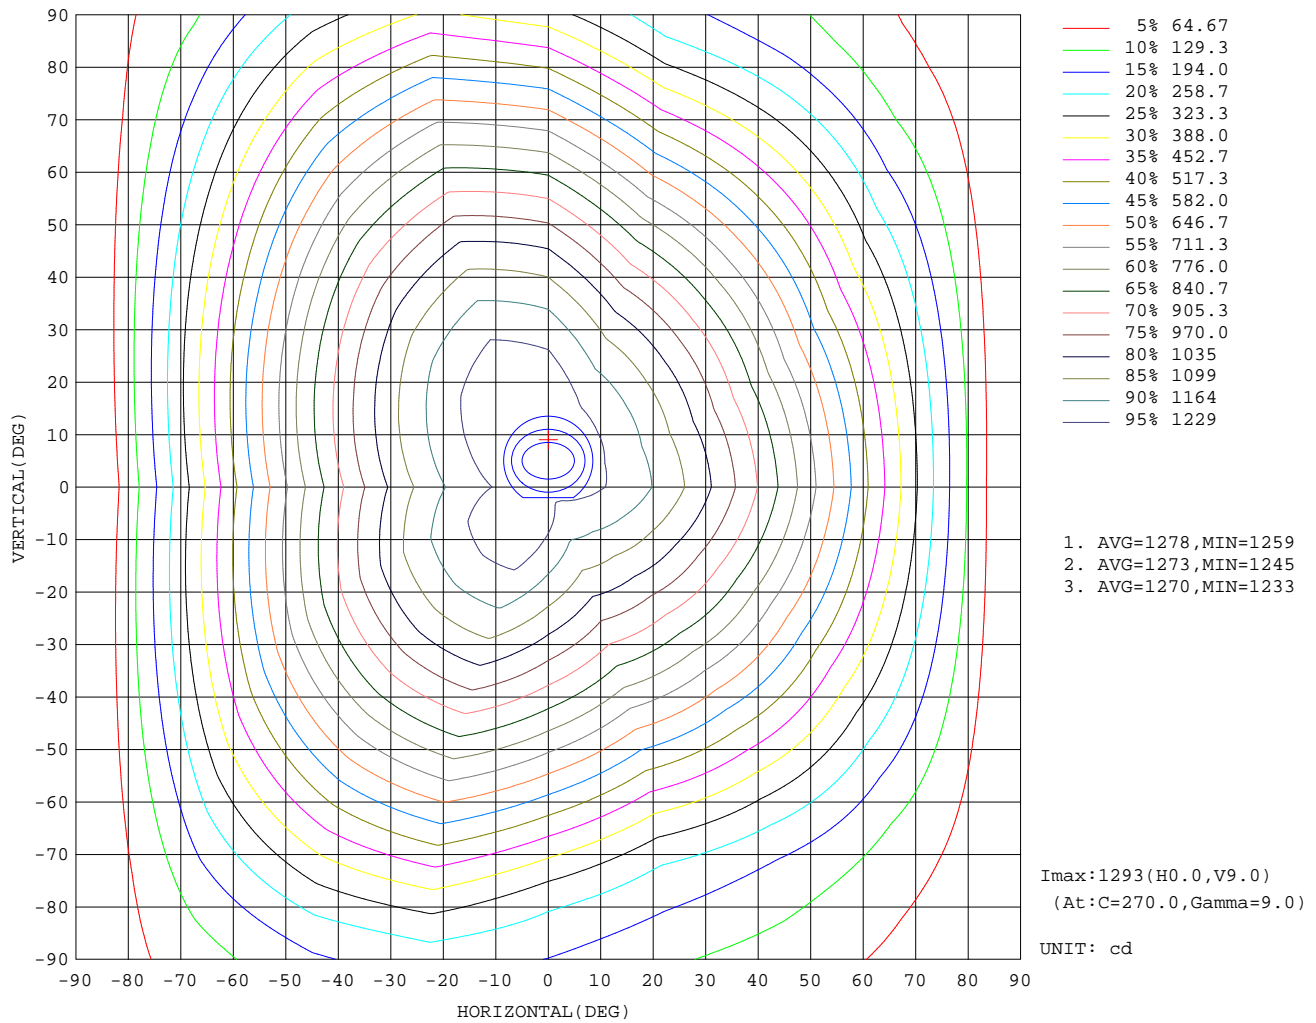

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:27 May 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

AAI Figure

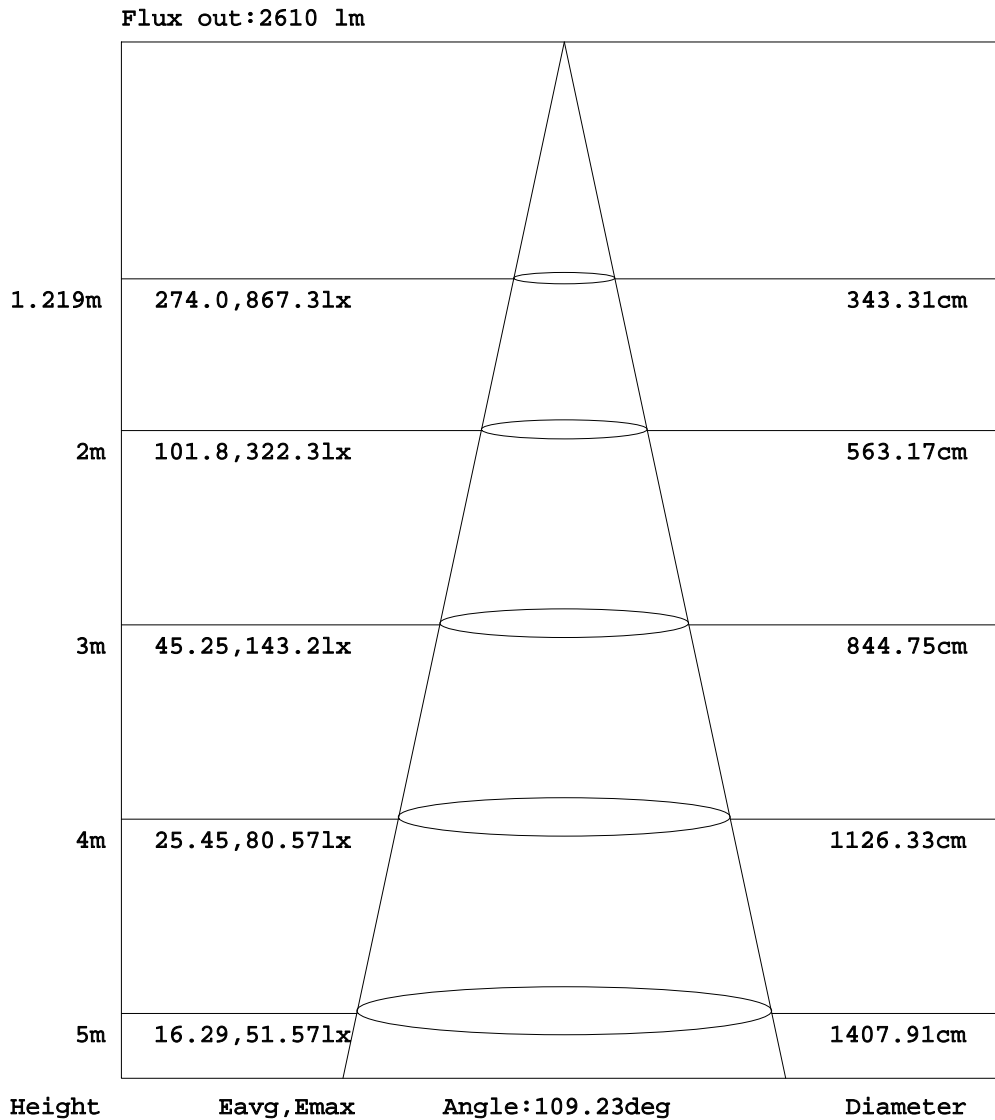


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 27 May 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

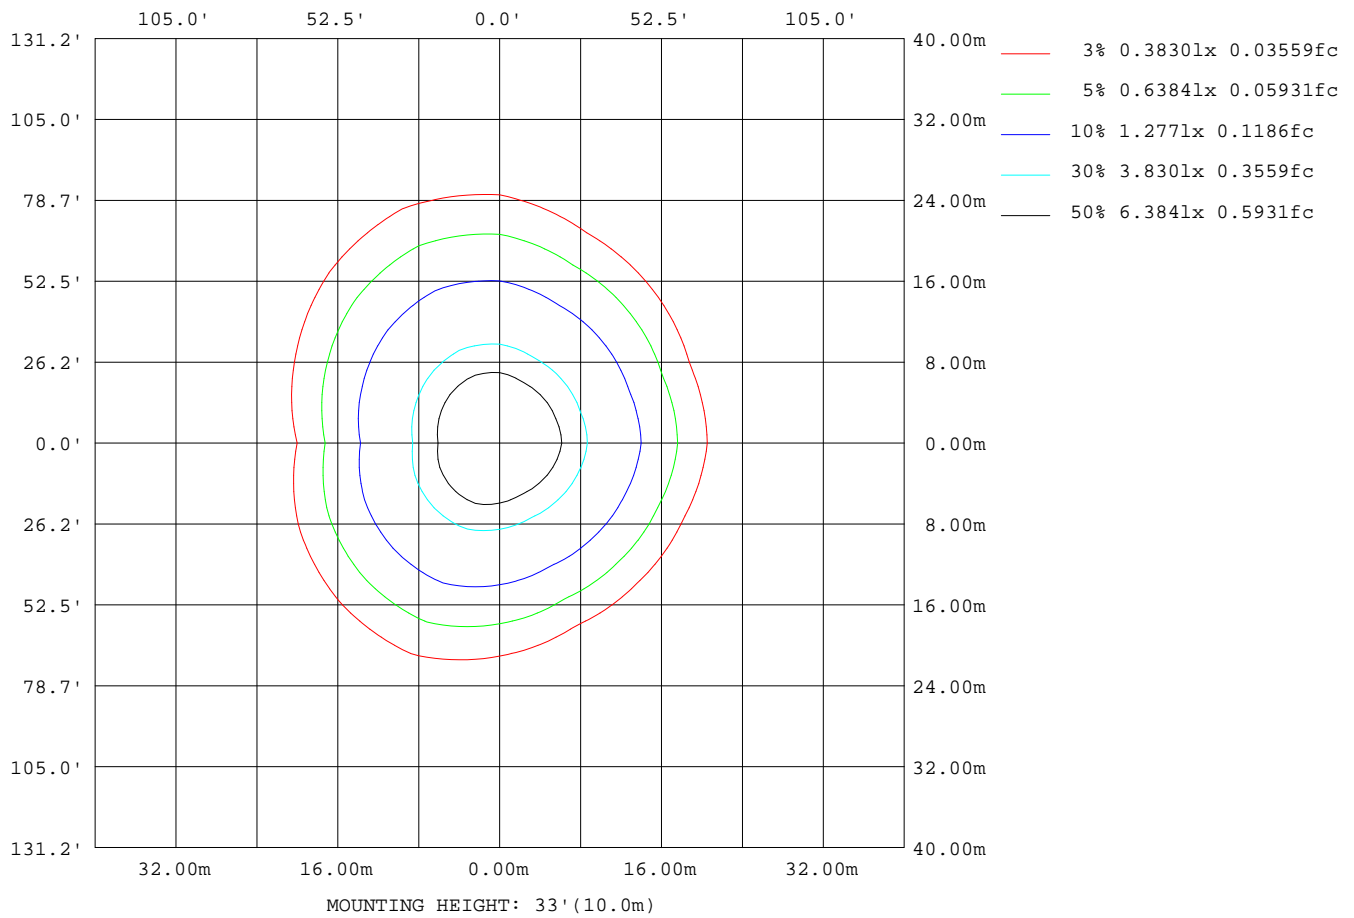

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 27 May 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:229.6V I:0.2214A P:47.58W PF:0.9363 Lamp Flux:4377.71x1 lm		
NAME: LED waterproof light 48W-6500K	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.5*0.1	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	6549
L_0~180(75)av	5283
L_0~180(85)av	2545
L_90~270(65)av	9733
L_90~270(75)av	11866
L_90~270(85)av	25228
L_45(65)av	8428
L_45(75)av	9505
L_45(85)av	17767

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:27 May 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

Planar Illuminance Curve

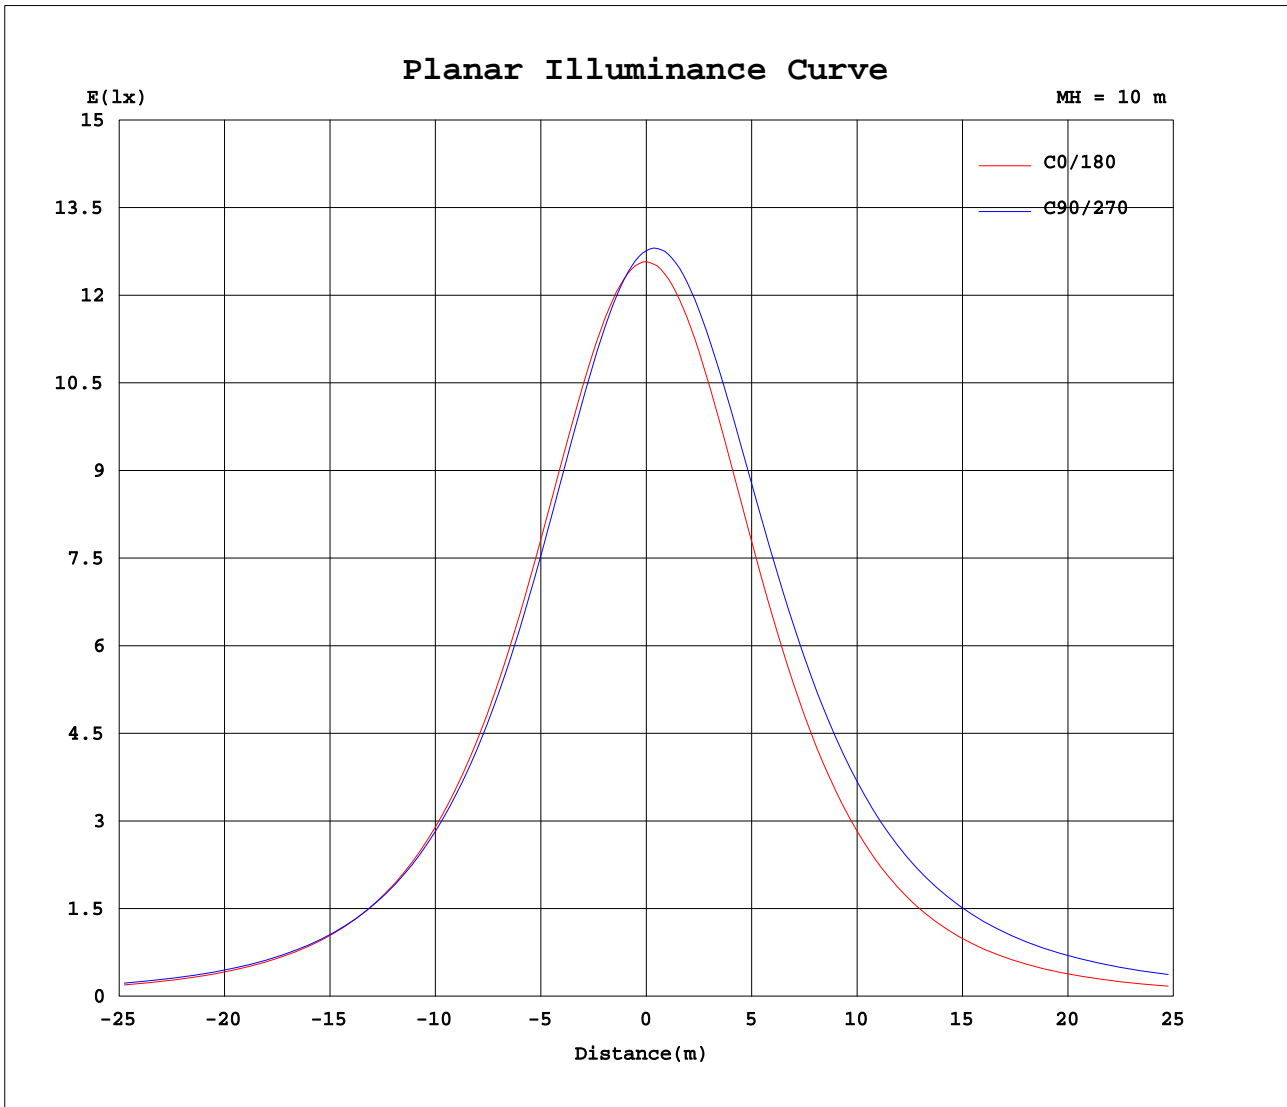

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 27 May 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1258	1252	1248	1249	1276	1289	1285	1276	1258	1252	1248	1249	1276	1289	1285	1276			
5	1251	1234	1220	1215	1253	1284	1284	1276	1251	1257	1266	1273	1290	1283	1274	1264			
10	1233	1205	1182	1173	1220	1268	1272	1263	1232	1252	1272	1285	1293	1266	1252	1240			
15	1203	1165	1134	1123	1178	1242	1248	1239	1202	1234	1266	1287	1284	1238	1220	1204			
20	1162	1115	1078	1065	1129	1206	1213	1204	1160	1204	1250	1278	1266	1201	1177	1157			
25	1111	1056	1015	1001	1073	1162	1168	1157	1106	1164	1222	1259	1237	1155	1125	1101			
30	1050	987	944	932	1011	1109	1114	1100	1043	1112	1183	1229	1199	1101	1064	1036			
35	980	913	869	859	944	1049	1052	1034	969	1050	1135	1189	1153	1040	996	963			
40	903	832	789	783	873	983	983	960	888	980	1078	1140	1099	974	922	883			
45	820	745	706	702	798	912	908	879	800	903	1012	1084	1040	902	843	798			
50	730	655	621	620	721	838	828	793	705	820	941	1021	974	828	761	708			
55	636	562	534	537	641	760	745	702	606	731	863	952	905	750	677	615			
60	537	468	446	454	559	680	660	608	502	638	782	880	832	670	591	519			
65	435	373	360	374	478	597	573	512	396	541	699	805	756	588	505	423			
70	330	281	280	300	399	514	486	415	289	446	615	727	677	505	418	330			
75	225	196	210	242	325	431	401	321	186	353	531	646	596	423	334	240			
80	124	123	163	204	267	353	319	233	92.2	265	448	564	514	343	256	159			
85	42.4	76.6	129	170	228	282	244	156	24.2	187	366	482	432	273	190	96.3			
90	9.14	49.4	99.3	139	192	231	185	97.9	6.07	121	289	401	351	219	147	61.4			
95	8.03	30.4	74.3	111	160	196	149	67.9	6.47	75.1	216	313	277	184	117	41.2			
100	7.26	18.1	53.3	85.9	130	162	120	48.3	7.07	54.6	159	243	227	151	91.7	27.3			
105	8.00	11.8	36.5	64.4	104	132	93.3	33.3	7.61	37.9	126	198	191	122	70.2	18.0			
110	8.55	10.7	23.5	46.2	80.5	105	71.1	22.4	8.03	27.7	103	168	154	95.8	52.8	12.4			
115	9.13	10.2	15.4	31.2	59.9	81.3	50.4	15.5	8.10	21.0	76.9	136	122	74.5	38.3	11.5			
120	9.70	10.1	14.3	19.8	42.4	60.8	34.3	12.1	8.63	16.3	56.6	109	96.5	56.5	26.8	11.7			
125	10.3	10.5	13.9	16.5	28.1	43.4	23.6	11.7	9.58	12.9	43.2	90.6	79.6	41.8	18.1	12.1			
130	10.8	11.1	13.7	16.0	18.1	29.1	16.3	11.7	10.3	11.9	32.6	68.0	62.9	29.1	15.1	12.3			
135	11.4	11.8	13.6	15.5	16.5	18.3	14.0	11.7	11.0	12.1	24.5	48.7	43.4	19.3	14.9	12.7			
140	12.1	12.5	13.7	15.0	16.0	15.5	13.9	12.0	11.8	12.5	18.2	33.0	30.9	16.0	15.0	13.2			
145	12.8	13.2	14.1	14.8	15.5	15.2	13.9	12.5	12.6	13.1	14.4	23.2	21.2	15.8	15.0	13.8			
150	13.5	13.9	14.5	14.8	15.0	15.0	14.0	13.0	13.4	13.7	14.4	16.5	16.0	15.7	15.1	14.4			
155	14.1	14.4	14.8	15.1	14.8	14.8	14.1	13.4	14.1	14.3	14.8	15.3	16.0	15.8	15.3	14.8			
160	14.7	14.9	15.2	15.2	15.1	14.8	14.3	14.0	14.7	14.8	15.2	15.5	16.2	15.8	15.5	15.2			
165	15.2	15.4	15.6	15.5	15.5	15.0	14.7	14.5	15.2	15.3	15.5	15.5	16.2	15.8	15.8	15.4			
170	15.7	15.8	15.8	15.8	15.8	15.4	15.2	15.0	15.6	15.7	15.7	15.6	16.2	15.9	16.0	15.5			
175	16.0	16.0	16.0	15.9	16.2	15.7	15.5	15.4	15.9	15.9	15.9	15.7	16.3	16.1	16.0	15.6			
180	16.0	16.1	16.0	15.9	16.2	16.0	15.8	15.7	16.1	16.0	16.0	15.9	16.1	16.0	15.8	15.6			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 27 May 2019

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks: