

DIMMER SWITCH — PUSH




Applications:

Used on all residential and commercial lighting installations.

Specifications

Approvals:	SAA/C-tick (RCM), AS/NZS 3100, AS/NZS 3133, IEC 60669-2-1
Control Method:	One Way
Dimmable LED Lamps:	10-150W
LV Halogen lighting with electronic transformers:	10-350W (Load Min / Max)
Incandescent lighting, MV Halogen lamps:	10-350W (Load Min / Max)
Working Temperature:	-20°C to +80°C
Humidity:	<75%
Over Temperature Protection:	Manual Rest
Compatible Loads:	Power-Lite LED Luminaires*
Dimming Range:	3% to 100% (Load dependent)
Warranty:	5 Years
Colour:	White
Carton Quantity:	20

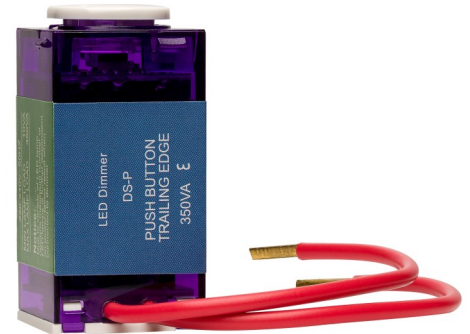

Code	Type of Dimmer	Voltage	Dimming Operation
DS-P	Push Button	AC220-240V—50Hz	Trailing Edge

Face plate and switch not included. Fits HPM & Clipsal Wall Plates.

* Due to the vast range of LED luminaires currently on the market, POWER-LITE is unable to take liability or responsibility for any incompatibility or warranty issues arising from the use of POWER-LITE dimmers with non-POWER-LITE products.