

## DIMMER SWITCH — PUSH





**Applications:**

Used on all residential and commercial lighting installations.

### Specifications

<b>Approvals:</b>	SAA/C-tick (RCM), AS/NZS 3100, AS/NZS 3133, IEC 60669-2-1
<b>Control Method:</b>	One Way
<b>Dimmable LED Lamps:</b>	10-150W
<b>LV Halogen lighting with electronic transformers:</b>	10-350W (Load Min / Max)
<b>Incandescent lighting, MV Halogen lamps:</b>	10-350W (Load Min / Max)
<b>Working Temperature:</b>	-20°C to +80°C
<b>Humidity:</b>	<75%
<b>Over Temperature Protection:</b>	Manual Rest
<b>Compatible Loads:</b>	Power-Lite LED Luminaires*
<b>Dimming Range:</b>	3% to 100% (Load dependent)
<b>Warranty:</b>	5 Years
<b>Colour:</b>	White
<b>Carton Quantity:</b>	20

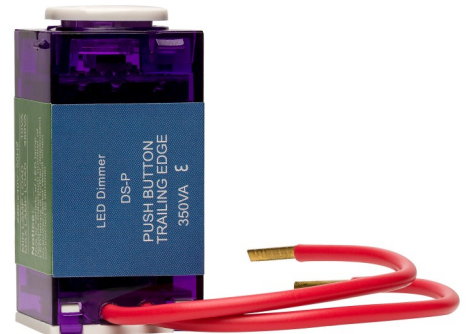

**Note:**

- These dimmer switches are compatible with any Power-Lite® dimmable products, excluding DALI drivers.
- Face plate and switch not included. Fits HPM & Clipsal Wall Plates.

\* Due to the vast range of LED luminaires currently on the market, POWER-LITE is unable to take liability or responsibility for any incompatibility or warranty issues arising from the use of POWER-LITE dimmers with non-POWER-LITE products.

Code	Type of Dimmer	Voltage	Dimming Operation
DS-P	Push Button	AC220-240V—50Hz	Trailing Edge