
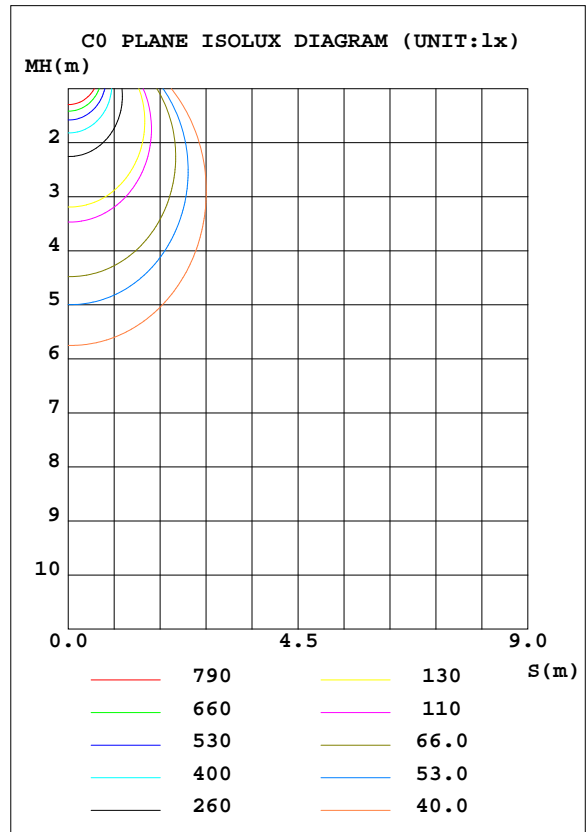


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.3V I:0.1660A P:38.10W PF:0.9520 Lamp Flux:3529.68x1 lm		
NAME: LL36W-CC-B	TYPE:36W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:1.175*0.03	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 92.64 lm/W			
MODEL	LL36W-CC-B	I <sub>max</sub> (cd)	1316	S/MH(C0/180)	1.22
NOMINAL POWER(W)	36	LOR(%)	100.0	S/MH(C90/270)	1.22
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3529.7	η UP, DN(C0-180)	0.7, 49.5
NOMINAL FLUX(lm)	3529.68	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.6, 49.2
LAMPS INSIDE	1	η up(%)	1.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	240.3	η down(%)	98.7	CIBSE SHR MAX	1.35

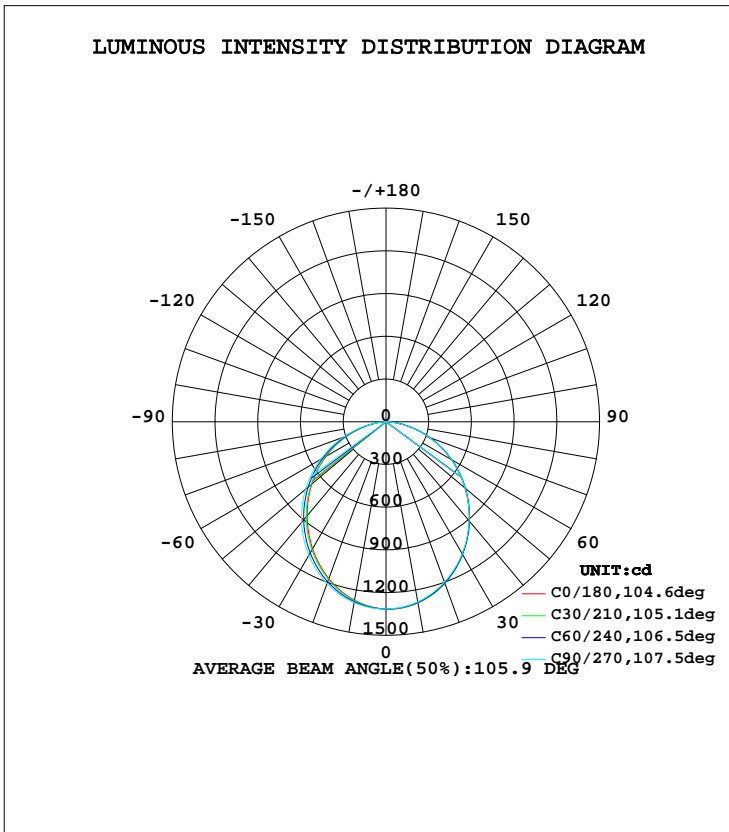


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2020-12-07

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:10.237m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM  
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	$\Phi$ lum,lamp
10	1292	1290	1284	1276	1273	1280	1290	1294	0- 10	124.1	124.1	3.52,3.52
20	1208	1206	1199	1181	1173	1188	1210	1214	10- 20	351.7	475.8	13.5,13.5
30	1074	1075	1070	1043	1031	1052	1083	1086	20- 30	522.9	998.7	28.3,28.3
40	908.7	911.6	908.4	877.0	862.1	885.5	922.4	922.5	30- 40	616.0	1615	45.7,45.7
50	724.5	727.6	725.4	693.7	679.6	700.2	737.0	736.6	40- 50	624.1	2239	63.4,63.4
60	528.2	531.2	527.8	499.6	487.8	502.9	534.7	536.2	50- 60	552.2	2791	79.1,79.1
70	325.7	328.3	320.8	300.6	289.9	299.3	321.7	327.8	60- 70	411.9	3203	90.7,90.7
80	131.7	133.9	122.0	112.9	105.9	108.1	116.8	127.0	70- 80	226.6	3429	97.2,97.2
90	9.860	8.489	3.012	4.394	3.443	3.462	2.150	6.753	80- 90	54.57	3484	98.7,98.7
100	3.124	3.361	3.890	3.616	2.897	3.193	3.048	3.038	90-100	3.280	3487	98.8,98.8
110	4.788	5.121	5.785	5.447	4.519	4.638	4.983	4.360	100-110	4.316	3492	98.9,98.9
120	6.508	6.949	7.825	7.394	6.351	6.398	6.926	6.086	110-120	5.782	3497	99.1,99.1
130	8.440	8.873	9.795	9.344	8.239	8.291	8.843	7.954	120-130	6.920	3504	99.3,99.3
140	10.30	10.68	11.48	11.15	9.729	9.815	10.12	9.482	130-140	7.327	3512	99.5,99.5
150	12.17	12.28	12.87	12.71	11.32	11.38	11.48	11.00	140-150	6.959	3519	99.7,99.7
160	13.81	13.62	13.99	13.96	12.88	12.72	12.69	12.41	150-160	5.802	3524	99.8,99.8
170	15.19	14.65	14.75	14.87	14.27	13.80	13.67	13.58	160-170	3.894	3528	100,100
180	15.85	15.14	14.97	15.21	15.87	15.13	14.97	15.20	170-180	1.405	3530	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

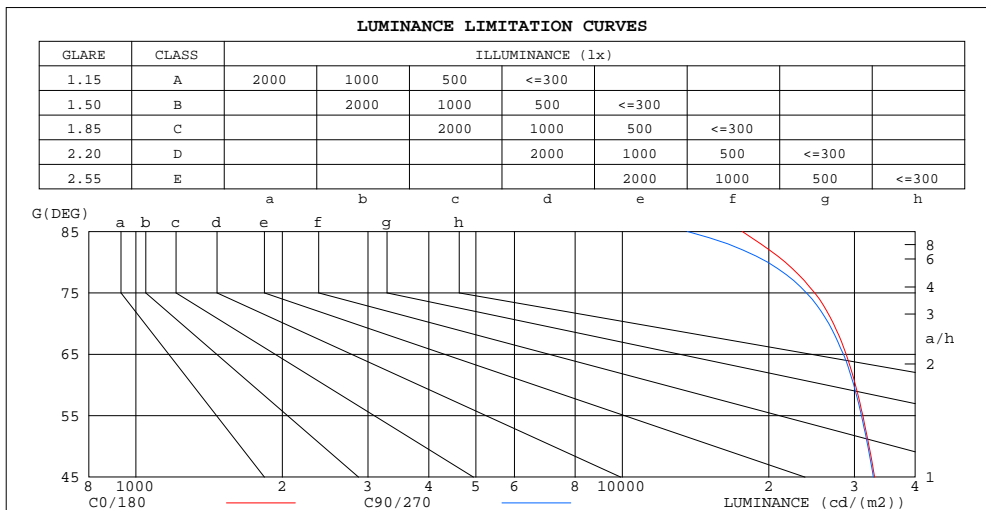


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2020-12-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
Humidity:65.0%  
Test Distance:10.237m [K=1.0000]  
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.3V I:0.1660A P:38.10W PF:0.9520 Lamp Flux:3529.68x1 lm		
NAME: LL36W-CC-B	TYPE:36W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:1.175*0.03	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.04	.90	.96	1.02	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.79	.89	.83	.77	.85	.80	.75	.82	.77	.74	.78	.75	.72	.70
3.0	.80	.72	.65	.78	.71	.65	.75	.69	.63	.72	.67	.62	.69	.65	.61	.59
4.0	.71	.62	.56	.70	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.53	.50
5.0	.63	.55	.48	.62	.54	.48	.60	.53	.47	.58	.51	.46	.56	.50	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.52	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.37	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.47	.39	.33	.45	.38	.33	.44	.37	.32	.43	.37	.32	.30
9.0	.44	.35	.30	.43	.35	.30	.42	.35	.30	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.25

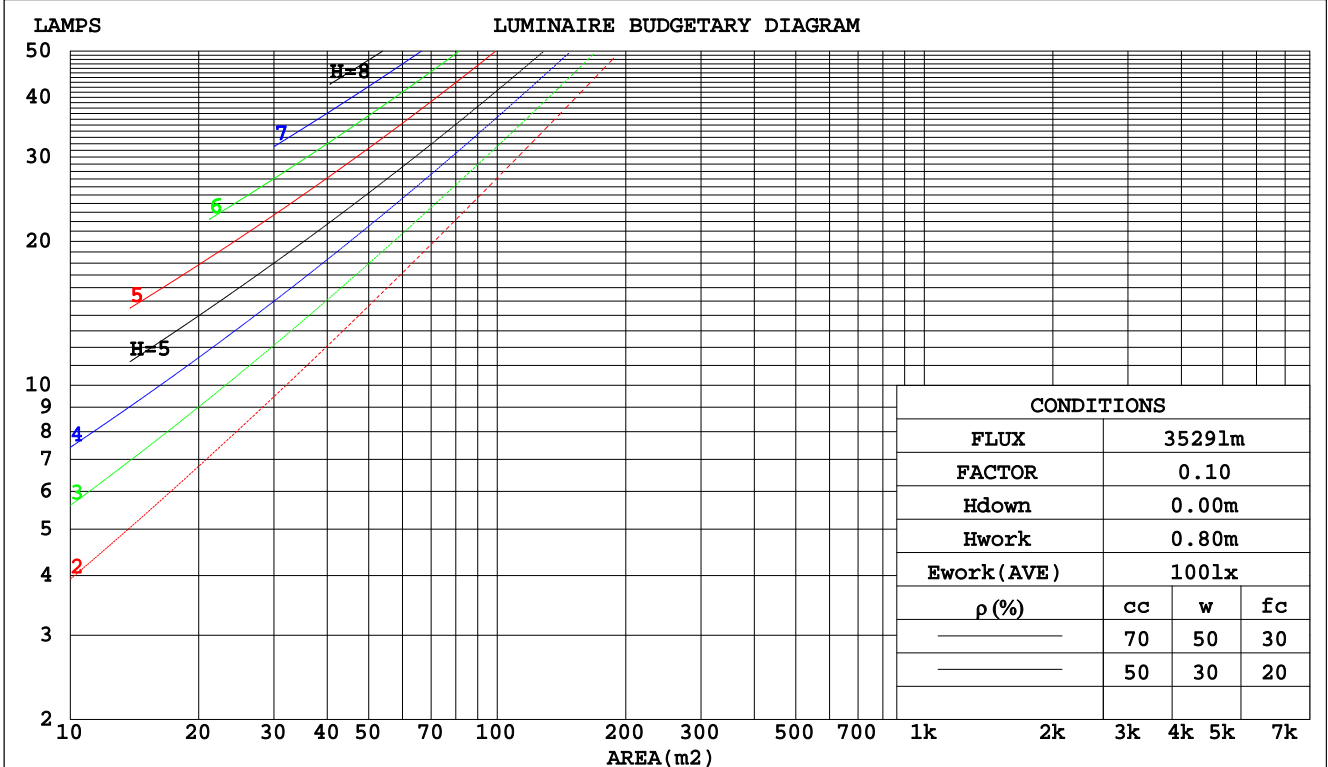

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2020-12-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
Humidity:65.0%  
Test Distance:10.237m [K=1.0000]  
Remarks:

WEC AND CCEC

Test:U:240.3V I:0.1660A P:38.10W PF:0.9520 Lamp Flux:3529.68x1 lm		
NAME: LL36W-CC-B	TYPE:36W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:1.175*0.03	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.301	.171	.054	.293	.167	.053	.279	.160	.051	.267	.154	.049	.255	.148	.048	
2.0	.285	.156	.048	.278	.153	.047	.266	.148	.046	.254	.143	.045	.244	.138	.044	
3.0	.264	.141	.042	.259	.138	.042	.248	.134	.041	.238	.130	.040	.228	.126	.039	
4.0	.245	.127	.037	.239	.125	.037	.230	.122	.036	.221	.118	.036	.212	.115	.035	
5.0	.226	.115	.033	.222	.114	.033	.213	.111	.033	.205	.108	.032	.198	.106	.032	
6.0	.210	.105	.030	.206	.104	.030	.199	.102	.030	.191	.099	.029	.185	.097	.029	
7.0	.196	.097	.027	.192	.096	.027	.185	.094	.027	.179	.092	.027	.173	.090	.026	
8.0	.183	.090	.025	.180	.089	.025	.174	.087	.025	.168	.085	.025	.162	.083	.024	
9.0	.172	.083	.023	.169	.082	.023	.163	.081	.023	.158	.079	.023	.153	.078	.022	
10.0	.162	.078	.022	.159	.077	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.200	.200	.200	.171	.171	.171	.117	.117	.117	.067	.067	.067	.021	.021	.021	
1.0	.190	.166	.145	.162	.143	.125	.111	.098	.086	.064	.057	.050	.020	.018	.016	
2.0	.181	.142	.109	.155	.122	.094	.106	.085	.066	.061	.049	.038	.020	.016	.013	
3.0	.173	.124	.085	.149	.107	.074	.102	.075	.052	.059	.044	.031	.019	.014	.010	
4.0	.166	.111	.069	.142	.096	.060	.098	.067	.042	.057	.039	.025	.018	.013	.008	
5.0	.158	.101	.058	.136	.087	.050	.094	.061	.036	.054	.036	.021	.017	.012	.007	
6.0	.151	.092	.050	.130	.080	.043	.090	.056	.031	.052	.033	.018	.017	.011	.006	
7.0	.145	.085	.044	.124	.074	.038	.086	.052	.027	.050	.031	.016	.016	.010	.005	
8.0	.138	.080	.039	.119	.069	.034	.082	.048	.024	.048	.029	.014	.015	.009	.005	
9.0	.132	.075	.036	.114	.065	.031	.079	.045	.022	.046	.027	.013	.015	.009	.004	
10.0	.127	.070	.033	.109	.061	.029	.076	.043	.020	.044	.025	.012	.014	.008	.004	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2020-12-07

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:10.237m [K=1.0000]  
 Remarks:

Uncorrected UGR Table

Test:U:240.3V I:0.1660A P:38.10W PF:0.9520 Lamp Flux:3529.68x1 lm										
NAME: LL36W-CC-B					TYPE:36W			WEIGHT:		
DIM.:					SPEC.:3000K			SERIAL No.:1		
MFR.:					SUR.:1.175*0.03			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.8	26.3	25.1	26.5	26.7	24.8	26.2	25.0	26.5	26.7
3H	26.3	27.6	26.6	27.9	28.1	26.2	27.6	26.5	27.8	28.1
4H	26.8	28.1	27.2	28.4	28.7	26.8	28.1	27.1	28.3	28.6
6H	27.2	28.4	27.6	28.7	29.0	27.1	28.3	27.5	28.6	28.9
8H	27.3	28.5	27.7	28.8	29.1	27.2	28.4	27.6	28.7	29.0
12H	27.4	28.5	27.8	28.8	29.2	27.2	28.4	27.6	28.7	29.0
4H 2H	25.4	26.7	25.7	26.9	27.2	25.4	26.6	25.7	26.9	27.2
3H	27.0	28.2	27.4	28.5	28.8	27.0	28.1	27.4	28.4	28.8
4H	27.7	28.8	28.1	29.1	29.5	27.7	28.7	28.1	29.0	29.4
6H	28.3	29.2	28.7	29.5	29.9	28.1	29.1	28.6	29.4	29.8
8H	28.4	29.3	28.8	29.7	30.1	28.3	29.1	28.7	29.5	29.9
12H	28.5	29.3	29.0	29.7	30.1	28.3	29.1	28.8	29.5	30.0
8H 4H	28.0	28.8	28.4	29.2	29.6	27.9	28.8	28.4	29.2	29.6
6H	28.6	29.4	29.1	29.8	30.2	28.5	29.2	29.0	29.7	30.1
8H	28.9	29.5	29.4	30.0	30.4	28.7	29.4	29.2	29.8	30.3
12H	29.1	29.6	29.6	30.1	30.6	28.9	29.4	29.4	29.9	30.4
12H 4H	28.0	28.8	28.4	29.2	29.6	27.9	28.7	28.4	29.1	29.6
6H	28.7	29.3	29.2	29.8	30.2	28.6	29.2	29.1	29.7	30.1
8H	29.0	29.5	29.5	30.0	30.5	28.8	29.4	29.3	29.8	30.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117 Corrected 3530 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.4)

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2020-12-07

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:10.237m [K=1.0000]  
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.3V I:0.1660A P:38.10W PF:0.9520 Lamp Flux:3529.68x1 lm		
NAME: LL36W-CC-B	TYPE:36W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:1.175*0.03	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	47	40	57	46	40	56	46	40	33
0.80	68	57	49	67	56	49	65	55	49	42
1.00	76	66	58	75	65	58	73	66	57	50
1.25	84	73	66	82	72	66	79	71	65	58
1.50	88	79	72	87	78	71	84	76	70	63
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	91	86	97	90	85	93	87	83	74
3.00	102	96	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	99	95	92	83
5.00	109	104	100	106	102	98	101	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2020-12-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:10.237m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:240.3V I:0.1660A P:38.10W PF:0.9520 Lamp Flux:3529.68x1 lm		
NAME: LL36W-CC-B	TYPE:36W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:1.175*0.03	PROTECTION ANGLE:

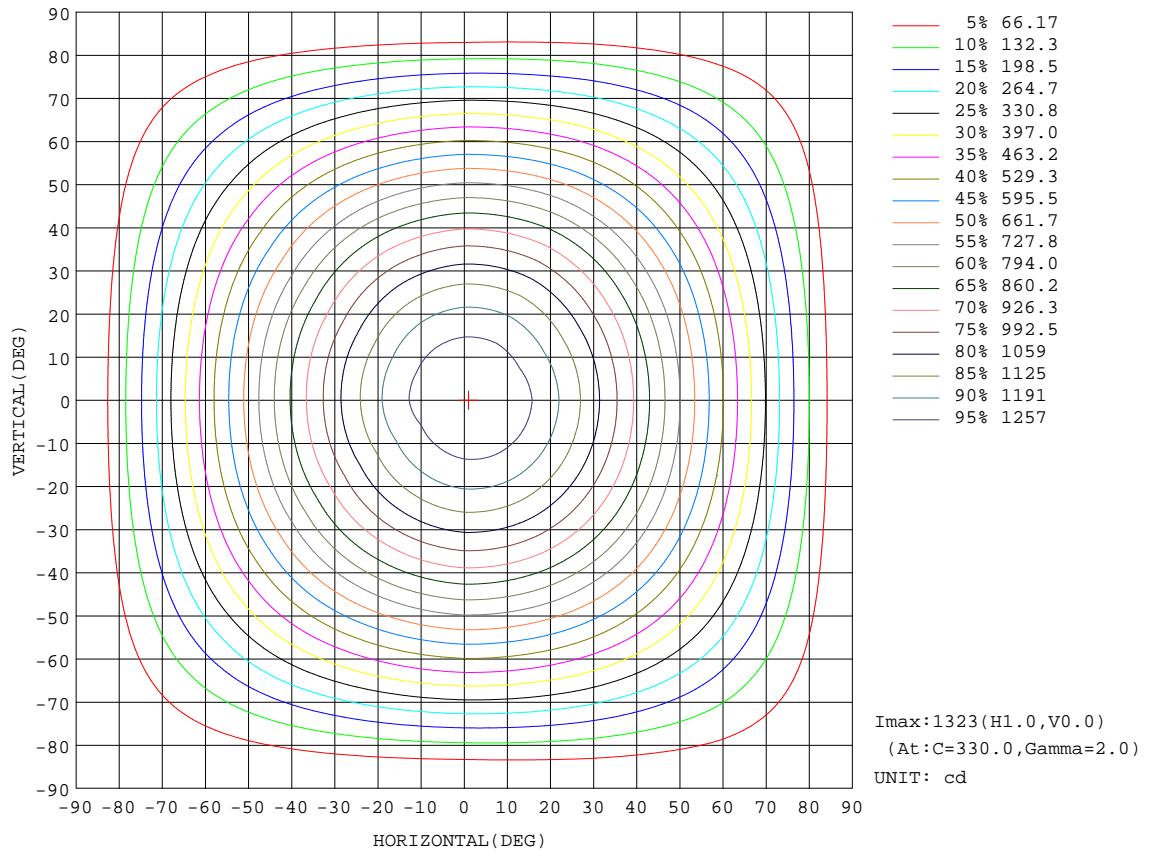


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2020-12-07

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:10.237m [K=1.0000]  
 Remarks:

AAI Figure

Test:U:240.3V I:0.1660A P:38.10W PF:0.9520 Lamp Flux:3529.68x1 lm		
NAME: LL36W-CC-B	TYPE:36W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:1.175*0.03	PROTECTION ANGLE:

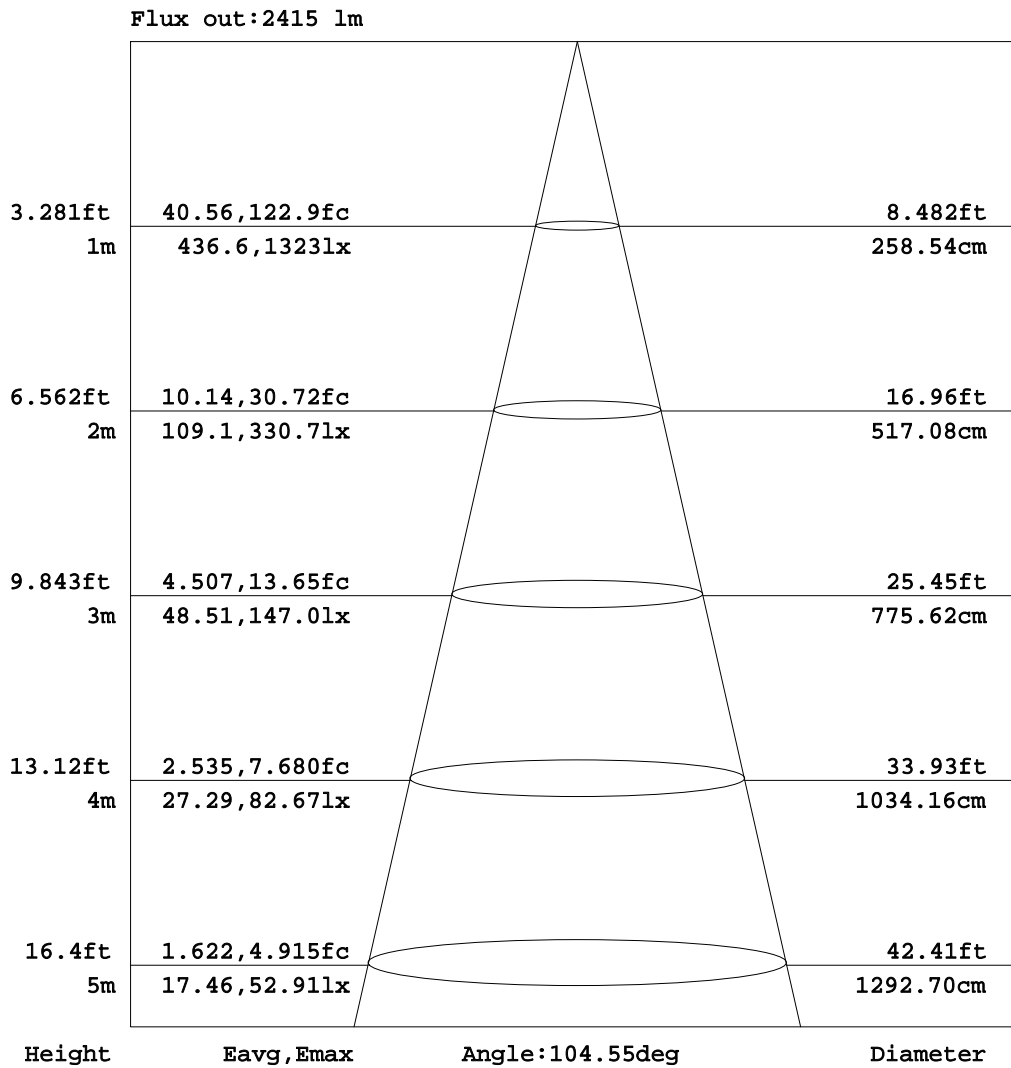

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2020-12-07

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:10.237m [K=1.0000]  
 Remarks:



**ISOLUX DIAGRAM**


Test:U:240.3V I:0.1660A P:38.10W PF:0.9520 Lamp Flux:3529.68x1 lm		
NAME: LL36W-CC-B	TYPE:36W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:1.175*0.03	PROTECTION ANGLE:

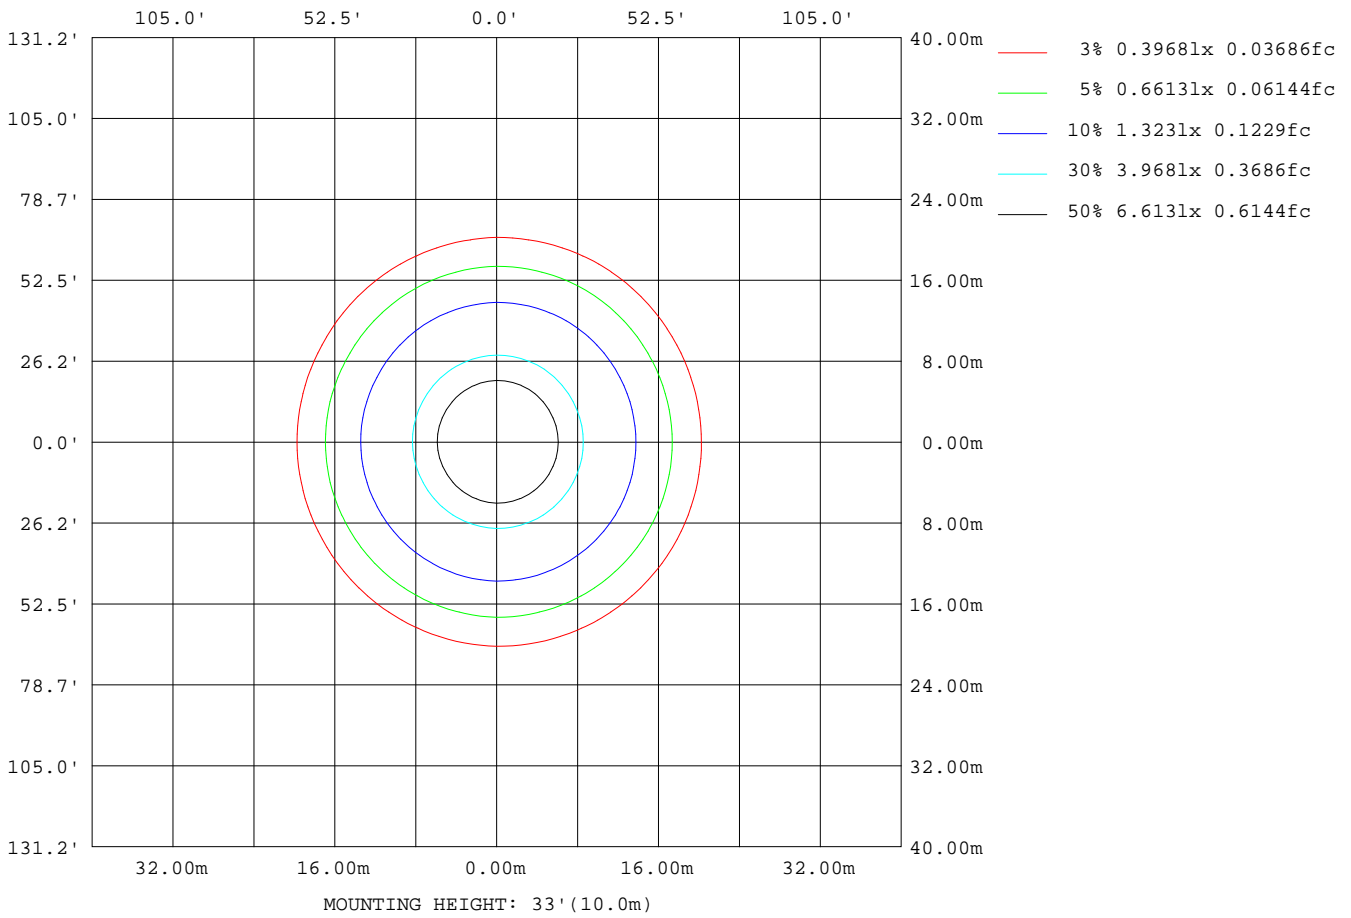

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2020-12-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:10.237m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

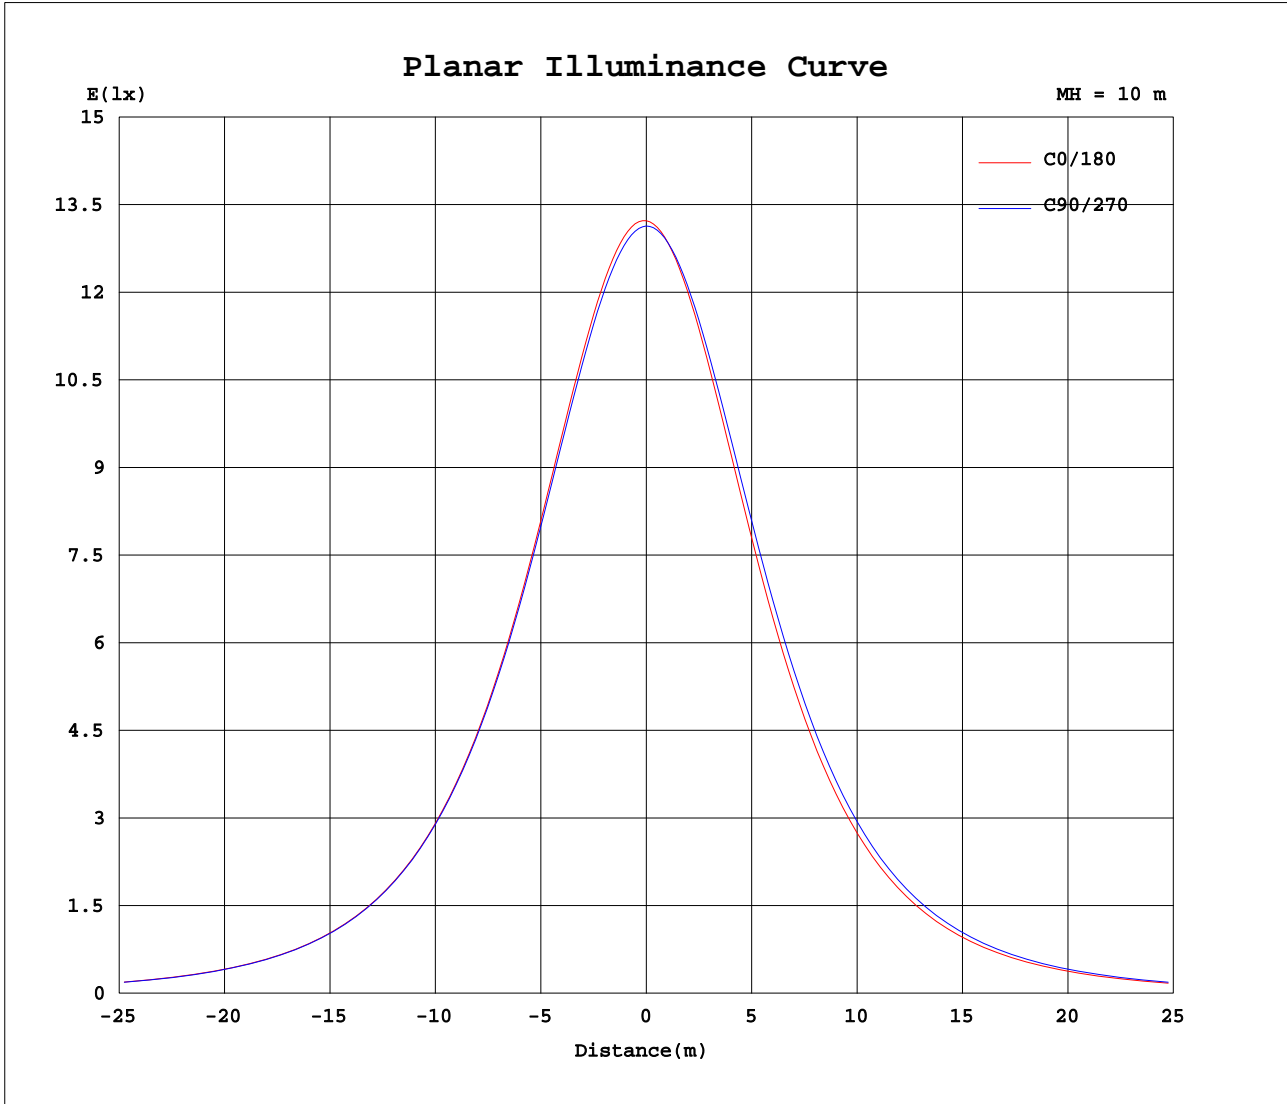

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2020-12-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity: 65.0%  
 Test Distance: 10.237m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.3V I:0.1660A P:38.10W PF:0.9520 Lamp Flux:3529.68x1 lm		
NAME: LL36W-CC-B	TYPE:36W	WEIGHT:
DIM.:	SPEC.:3000K	SERIAL No.:1
MFR.:	SUR.:1.175*0.03	PROTECTION ANGLE:

Table--1

UNIT: cd

C( DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1315	1315	1315	1315	1315	1315	1315	1315	1315	1315	1315	1315							
5	1312	1311	1309	1307	1304	1302	1302	1303	1307	1310	1312	1313							
10	1292	1291	1288	1284	1278	1273	1273	1276	1283	1290	1294	1294							
15	1257	1256	1253	1248	1238	1231	1229	1234	1246	1256	1262	1260							
20	1208	1207	1204	1199	1186	1176	1173	1180	1196	1210	1216	1212							
25	1146	1146	1145	1139	1123	1110	1106	1114	1135	1152	1158	1152							
30	1074	1075	1075	1070	1051	1035	1031	1040	1064	1083	1090	1082							
35	994	996	997	992	972	954	949	959	985	1007	1012	1003							
40	909	911	912	908	887	867	862	871	900	922	928	917							
45	818	821	822	819	796	778	772	781	809	832	837	827							
50	725	727	728	725	703	685	680	687	714	737	741	732							
55	628	630	631	628	606	589	584	590	615	637	642	633							
60	528	531	531	528	507	492	488	492	514	535	539	533							
65	427	430	430	425	407	393	388	392	409	429	434	431							
70	326	329	328	321	306	295	290	293	306	322	328	328							
75	226	230	227	218	207	199	194	195	205	216	224	226							
80	132	136	132	122	116	110	106	105	111	117	127	127							
85	53.9	56.6	51.4	41.9	40.7	38.7	36.5	35.2	36.0	37.4	46.5	49.8							
90	9.86	10.3	6.72	3.01	4.12	4.67	3.44	3.69	3.23	2.15	5.06	8.45							
95	2.48	2.60	2.76	2.97	2.90	2.78	2.25	2.45	2.73	2.25	2.67	2.46							
100	3.12	3.20	3.52	3.89	3.74	3.49	2.90	3.07	3.31	3.05	3.14	2.94							
105	3.89	3.99	4.48	4.76	4.68	4.36	3.67	3.79	4.00	4.04	3.75	3.56							
110	4.79	4.86	5.38	5.78	5.60	5.29	4.52	4.52	4.75	4.98	4.49	4.23							
115	5.60	5.77	6.25	6.79	6.55	6.26	5.41	5.32	5.66	5.94	5.41	4.97							
120	6.51	6.73	7.17	7.82	7.54	7.25	6.35	6.17	6.63	6.93	6.36	5.81							
125	7.44	7.70	8.15	8.82	8.55	8.20	7.30	7.08	7.61	7.90	7.33	6.68							
130	8.44	8.64	9.10	9.80	9.55	9.14	8.24	8.02	8.56	8.84	8.26	7.65							
135	9.35	9.57	10.0	10.7	10.4	10.1	8.86	8.70	9.23	9.35	8.84	8.43							
140	10.3	10.5	10.9	11.5	11.3	11.0	9.73	9.55	10.1	10.1	9.63	9.33							
145	11.3	11.3	11.7	12.2	12.1	11.8	10.5	10.4	10.8	10.8	10.4	10.1							
150	12.2	12.2	12.4	12.9	12.8	12.6	11.3	11.2	11.6	11.5	11.1	10.9							
155	13.0	13.0	13.0	13.4	13.4	13.3	12.1	11.9	12.2	12.1	11.8	11.7							
160	13.8	13.6	13.6	14.0	13.9	14.0	12.9	12.6	12.8	12.7	12.4	12.4							
165	14.5	14.2	14.1	14.4	14.4	14.5	13.6	13.2	13.3	13.2	13.0	13.0							
170	15.2	14.7	14.6	14.8	14.8	15.0	14.3	13.8	13.8	13.7	13.5	13.6							
175	15.7	15.1	14.9	15.0	15.0	15.3	15.7	14.9	14.8	14.7	14.8	15.0							
180	15.9	15.3	15.0	15.0	15.1	15.3	15.9	15.2	15.0	15.0	15.1	15.3							

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2020-12-07

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.276  
 Humidity:65.0%  
 Test Distance:10.237m [K=1.0000]  
 Remarks: