

## BACKLIT LED LIGHT PANEL

The POWER-LITE® LED back lit panel is produced using state of the art automated production lines, to provide a cost effective LED panel for all applications.




### Applications:

Office, Healthcare, Retail, Domestic & Commercial.

### Specifications

<b>LED Chip:</b>	SMD CR180
<b>Warranty:</b>	3 Years
<b>Life Expectancy:</b>	50,000 Hours
<b>Working Temperature:</b>	-20°C to +45°C
<b>Power Factor:</b>	>0.9
<b>Approvals:</b>	SAA/C-tick (RCM)
<b>Voltage:</b>	AC200-240V
<b>LED Driver:</b>	Flicker free
<b>Replaces:</b>	36W replaces 72W
<b>Beam Angle:</b>	120°
<b>IP Rating:</b>	IP20
<b>Carton Quantity:</b>	5
<b>Frame Colour:</b>	White
<b>Colour Temperature:</b>	4000K
<b>CRI:</b>	>80

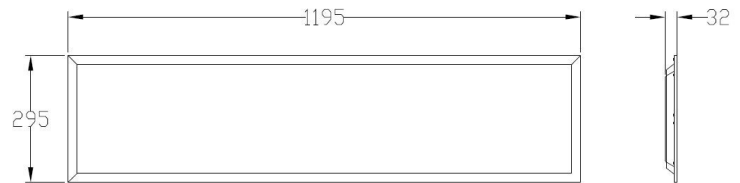

BLP36W

### NOTE:

- The driver for these LED panels is NOT IC-4 rated.
- These products are compatible with the following: PBS-413-E, LED-LPF120/30, LP-EP, Motion Sensors.

Code	Wattage	Connection	Lumen Output	Dimensions	Dimmable	Colour Temp	Nett Weight	IC RATING
BLP36W-120/30	36W	1.5m Power cable with SAA plug	3600LM	295mm x 1195mm	No	4000k	2.5kg	IC-4
BLP36W-120/30-5K	36W	1.5m Power cable with SAA plug	3600LM	295mm x 1195mm	No	5000k	2.5kg	IC-4
BLP36W-120/30-CW	36W	1.5m Power cable with SAA plug	3600LM	295mm x 1195mm	No	6000k	2.5kg	IC-4