
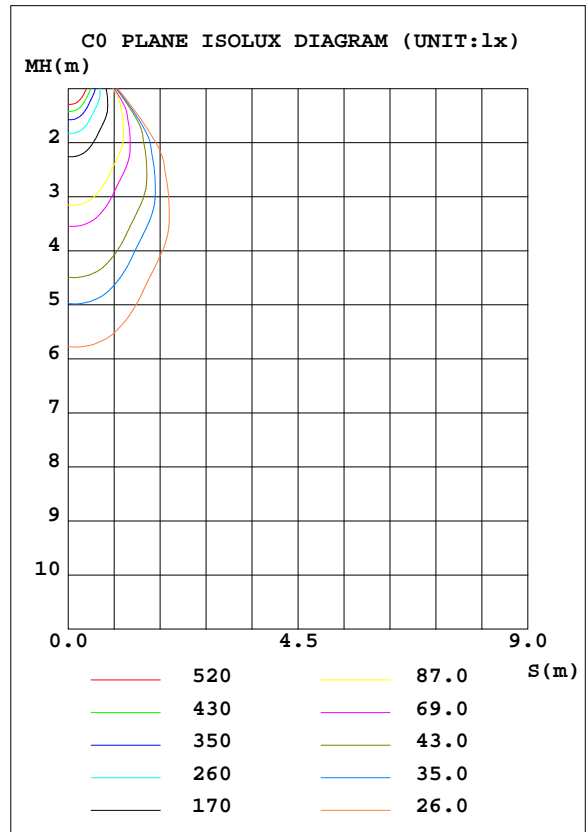


LUMINAIRE PHOTOMETRIC TEST REPORT

| | | |
|--|-------------|-------------------|
| Test:U:240.7V I:0.0390A P:9.150W PF:0.9640 Lamp Flux:846.25x1 lm | | |
| NAME: LED-DL10WCOB-CW-W | TYPE:10W | WEIGHT: |
| DIM.: | SPEC.:5700K | SERIAL No.:1 |
| MFR.: | SUR.:0.0325 | PROTECTION ANGLE: |

| DATA OF LAMP | | PHOTOMETRIC DATA Eff: 92.49 lm/W | | | |
|------------------|-------------------|----------------------------------|--------|--------------------|-----------|
| MODEL | LED-DL10WCOB-CW-W | Imax(cd) | 870.6 | S/MH(C0/180) | 0.89 |
| NOMINAL POWER(W) | 10 | LOR(%) | 100.0 | S/MH(C90/270) | 0.86 |
| RATED VOLTAGE(V) | 240 | TOTAL FLUX(lm) | 846.25 | η UP, DN(C0-180) | 0.0, 49.8 |
| NOMINAL FLUX(lm) | 846.25 | CIE CLASS | DIRECT | η UP, DN(C180-360) | 0.0, 50.2 |
| LAMPS INSIDE | 1 | η up(%) | 0.0 | CIBSE SHR NOM | 1.00 |
| TEST VOLTAGE(V) | 240.7 | η down(%) | 100.0 | CIBSE SHR MAX | 1.05 |

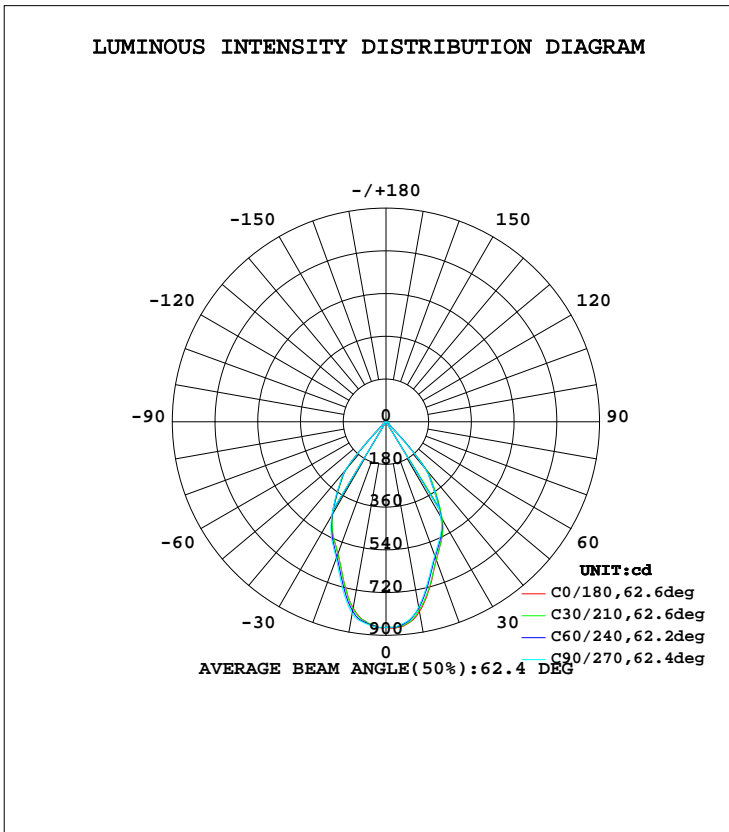

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMAN
 Test Date:2020-06-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.443m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | γ | Φ zone | Φ total | lum, lamp |
|-----|-----------------------|-------|-------|-------|-------|-------|-------|-------|---------|---------|---------|-----------|
| 10 | 811.6 | 801.2 | 792.6 | 786.6 | 796.5 | 805.0 | 820.1 | 825.9 | 0- 10 | 80.19 | 80.19 | 9.48,9.48 |
| 20 | 620.3 | 612.9 | 600.1 | 588.3 | 593.0 | 599.7 | 613.1 | 624.7 | 10- 20 | 196.5 | 276.7 | 32.7,32.7 |
| 30 | 470.3 | 469.6 | 462.4 | 454.0 | 454.6 | 451.4 | 458.4 | 471.6 | 20- 30 | 247.2 | 523.9 | 61.9,61.9 |
| 40 | 263.0 | 263.6 | 255.5 | 245.1 | 261.8 | 260.5 | 269.2 | 275.3 | 30- 40 | 223.3 | 747.2 | 88.3,88.3 |
| 50 | 17.30 | 18.04 | 18.12 | 17.58 | 17.34 | 16.88 | 16.82 | 17.07 | 40- 50 | 64.50 | 811.7 | 95.9,95.9 |
| 60 | 12.61 | 13.50 | 14.25 | 14.08 | 13.02 | 12.44 | 11.90 | 11.74 | 50- 60 | 13.10 | 824.8 | 97.5,97.5 |
| 70 | 10.41 | 11.04 | 11.25 | 11.05 | 11.10 | 10.44 | 10.11 | 10.39 | 60- 70 | 12.32 | 837.2 | 98.9,98.9 |
| 80 | 3.444 | 3.660 | 4.215 | 3.597 | 4.397 | 3.416 | 3.828 | 3.165 | 70- 80 | 8.078 | 845.2 | 99.9,99.9 |
| 90 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 80- 90 | 1.019 | 846.2 | 100,100 |
| 100 | | | | | | | | | 90-100 | | | |
| 110 | | | | | | | | | 100-110 | | | |
| 120 | | | | | | | | | 110-120 | | | |
| 130 | | | | | | | | | 120-130 | | | |
| 140 | | | | | | | | | 130-140 | | | |
| 150 | | | | | | | | | 140-150 | | | |
| 160 | | | | | | | | | 150-160 | | | |
| 170 | | | | | | | | | 160-170 | | | |
| 180 | | | | | | | | | 170-180 | | | |
| DEG | LUMINOUS INTENSITY:cd | | | | | | | | | UNIT:lm | | |


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMAN
 Test Date:2020-06-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.443m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

| | | |
|--|-------------|-------------------|
| Test:U:240.7V I:0.0390A P:9.150W PF:0.9640 Lamp Flux:846.25x1 lm | | |
| NAME: LED-DL10WCOB-CW-W | TYPE:10W | WEIGHT: |
| DIM.: | SPEC.:5700K | SERIAL No.:1 |
| MFR.: | SUR.:0.0325 | PROTECTION ANGLE: |

| | | | | | | | | | | | | | | | | |
|------|--|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| pcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| pw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| pfc | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio Coefficients of Utilization(CU) | | | | | | | | | | | | | | | |
| 0.0 | 1.19 | 1.19 | 1.19 | 1.16 | 1.16 | 1.16 | 1.11 | 1.11 | 1.11 | 1.06 | 1.06 | 1.06 | 1.02 | 1.02 | 1.02 | 1.00 |
| 1.0 | 1.10 | 1.07 | 1.05 | 1.08 | 1.05 | 1.03 | 1.04 | 1.02 | 1.00 | .98 | .97 | .97 | .97 | .95 | .94 | .92 |
| 2.0 | 1.02 | .97 | .94 | .90 | .96 | .92 | .97 | .93 | .90 | .94 | .91 | .88 | .91 | .89 | .87 | .85 |
| 3.0 | .94 | .89 | .84 | .93 | .88 | .84 | .90 | .86 | .82 | .87 | .84 | .81 | .85 | .82 | .80 | .78 |
| 4.0 | .87 | .81 | .77 | .86 | .81 | .76 | .84 | .79 | .75 | .82 | .78 | .75 | .80 | .76 | .74 | .72 |
| 5.0 | .81 | .75 | .70 | .80 | .74 | .70 | .78 | .73 | .69 | .77 | .72 | .69 | .75 | .71 | .68 | .67 |
| 6.0 | .76 | .69 | .65 | .75 | .69 | .65 | .73 | .68 | .64 | .72 | .67 | .64 | .71 | .66 | .63 | .62 |
| 7.0 | .71 | .64 | .60 | .70 | .64 | .60 | .69 | .63 | .59 | .68 | .63 | .59 | .66 | .62 | .59 | .57 |
| 8.0 | .66 | .60 | .56 | .66 | .60 | .56 | .65 | .59 | .55 | .64 | .59 | .55 | .63 | .58 | .55 | .53 |
| 9.0 | .62 | .56 | .52 | .62 | .56 | .52 | .61 | .55 | .52 | .60 | .55 | .51 | .59 | .55 | .51 | .50 |
| 10.0 | .59 | .53 | .49 | .58 | .52 | .48 | .57 | .52 | .48 | .57 | .52 | .48 | .56 | .51 | .48 | .47 |

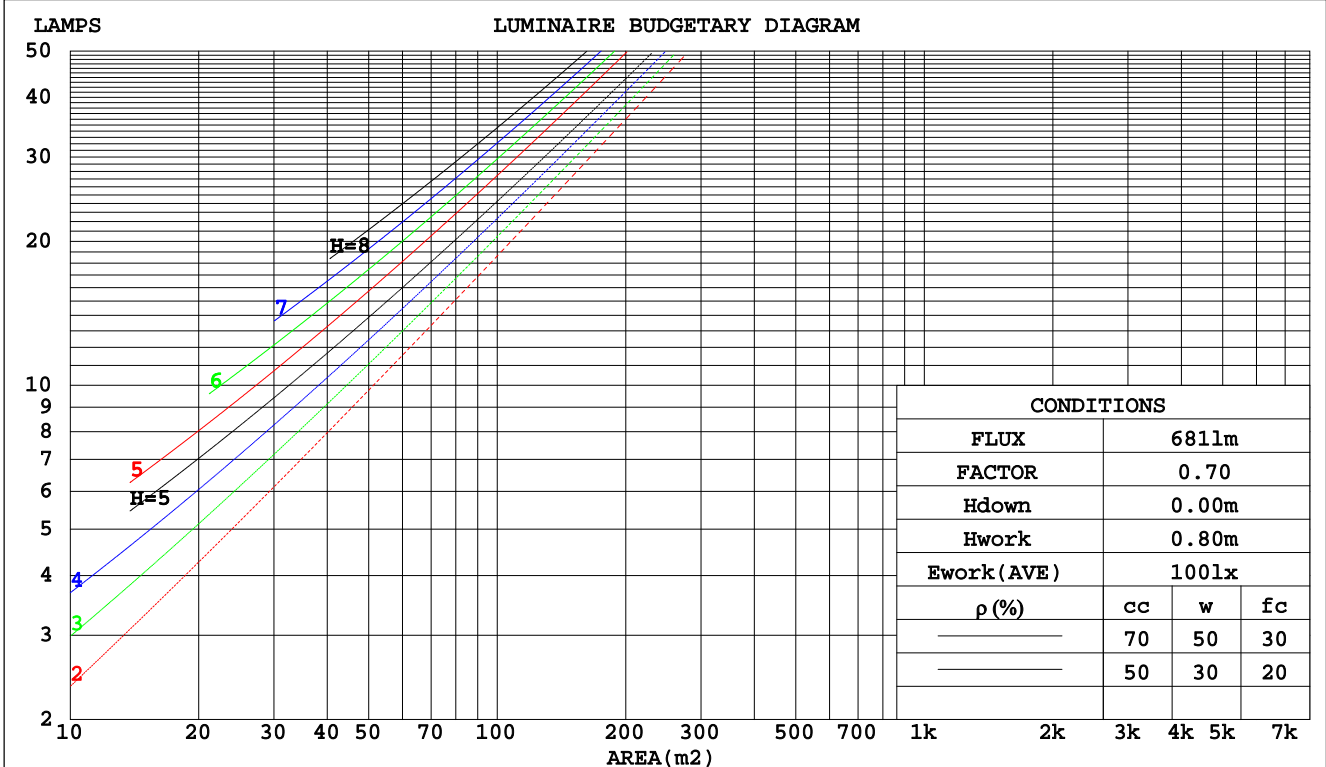

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMAN
 Test Date:2020-06-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.443m [K=1.0000]
 Remarks:

WEC AND CCEC

| | | |
|--|-------------|-------------------|
| Test:U:240.7V I:0.0390A P:9.150W PF:0.9640 Lamp Flux:846.25x1 lm | | |
| NAME: LED-DL10WCOB-CW-W | TYPE:10W | WEIGHT: |
| DIM.: | SPEC.:5700K | SERIAL No.:1 |
| MFR.: | SUR.:0.0325 | PROTECTION ANGLE: |

| ρcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|-----------------------|------|------|------|------|------|---------------------------------|------|------|------|------|------|------|------|------|---|
| ρw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| ρfc | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | Wall Exitance Coefficients(WEC) | | | | | | | | | |
| 0.0 | | | | | | | | | | | | | | | | |
| 1.0 | .193 | .110 | .035 | .186 | .106 | .034 | .173 | .100 | .032 | .162 | .093 | .030 | .151 | .088 | .028 | |
| 2.0 | .185 | .101 | .031 | .179 | .099 | .030 | .169 | .094 | .029 | .159 | .089 | .028 | .150 | .085 | .027 | |
| 3.0 | .176 | .094 | .028 | .171 | .092 | .028 | .162 | .088 | .027 | .153 | .084 | .026 | .146 | .081 | .025 | |
| 4.0 | .167 | .087 | .026 | .163 | .085 | .025 | .155 | .082 | .025 | .148 | .079 | .024 | .141 | .076 | .023 | |
| 5.0 | .159 | .081 | .023 | .155 | .080 | .023 | .148 | .077 | .023 | .142 | .075 | .022 | .136 | .073 | .022 | |
| 6.0 | .151 | .076 | .022 | .148 | .075 | .022 | .142 | .073 | .021 | .136 | .071 | .021 | .131 | .069 | .020 | |
| 7.0 | .144 | .071 | .020 | .142 | .071 | .020 | .136 | .069 | .020 | .131 | .067 | .020 | .126 | .065 | .019 | |
| 8.0 | .138 | .067 | .019 | .135 | .067 | .019 | .130 | .065 | .019 | .126 | .064 | .018 | .121 | .062 | .018 | |
| 9.0 | .132 | .064 | .018 | .130 | .063 | .018 | .125 | .062 | .018 | .121 | .061 | .017 | .117 | .059 | .017 | |
| 10.0 | .126 | .061 | .017 | .124 | .060 | .017 | .120 | .059 | .017 | .116 | .058 | .016 | .113 | .057 | .016 | |

| ρcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|-----------------------|------|------|------|------|------|--|------|------|------|------|------|------|------|------|---|
| ρw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| ρfc | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | Ceiling Cavity Exitance Coefficients(CCEC) | | | | | | | | | |
| 0.0 | .190 | .190 | .190 | .163 | .163 | .163 | .111 | .111 | .111 | .064 | .064 | .064 | .020 | .020 | .020 | |
| 1.0 | .172 | .157 | .144 | .147 | .135 | .124 | .101 | .093 | .085 | .058 | .054 | .050 | .019 | .017 | .016 | |
| 2.0 | .158 | .132 | .111 | .135 | .114 | .096 | .093 | .079 | .067 | .053 | .046 | .039 | .017 | .015 | .013 | |
| 3.0 | .146 | .114 | .088 | .126 | .098 | .076 | .086 | .068 | .053 | .050 | .040 | .031 | .016 | .013 | .010 | |
| 4.0 | .137 | .099 | .071 | .117 | .086 | .061 | .081 | .060 | .043 | .047 | .035 | .026 | .015 | .011 | .008 | |
| 5.0 | .128 | .088 | .058 | .110 | .076 | .050 | .076 | .053 | .035 | .044 | .031 | .021 | .014 | .010 | .007 | |
| 6.0 | .121 | .079 | .048 | .104 | .068 | .042 | .072 | .048 | .030 | .042 | .028 | .018 | .013 | .009 | .006 | |
| 7.0 | .115 | .071 | .041 | .099 | .062 | .035 | .068 | .043 | .025 | .040 | .026 | .015 | .013 | .008 | .005 | |
| 8.0 | .109 | .065 | .035 | .094 | .056 | .030 | .065 | .040 | .022 | .038 | .023 | .013 | .012 | .008 | .004 | |
| 9.0 | .104 | .060 | .030 | .090 | .052 | .026 | .062 | .037 | .019 | .036 | .022 | .011 | .012 | .007 | .004 | |
| 10.0 | .100 | .056 | .026 | .086 | .048 | .023 | .060 | .034 | .016 | .035 | .020 | .010 | .011 | .007 | .003 | |

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMAN
 Test Date:2020-06-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.443m [K=1.0000]
 Remarks:

Uncorrected UGR Table

| | | | | | | | | | | |
|--|------------------|------|------|------|-------------|----------------|------|-------------------|------|------|
| Test:U:240.7V I:0.0390A P:9.150W PF:0.9640 Lamp Flux:846.25x1 lm | | | | | | | | | | |
| NAME: LED-DL10WCOB-CW-W | | | | | TYPE:10W | | | WEIGHT: | | |
| DIM.: | | | | | SPEC.:5700K | | | SERIAL No.:1 | | |
| MFR.: | | | | | SUR.:0.0325 | | | PROTECTION ANGLE: | | |
| ceiling/cavity | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 |
| walls | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 |
| working plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| Room dimensions | Viewed crosswise | | | | | Viewed endwise | | | | |
| x = 2H y = 2H | 21.8 | 22.9 | 22.1 | 23.1 | 23.2 | 21.6 | 22.6 | 21.8 | 22.8 | 23.0 |
| 3H | 21.9 | 22.8 | 22.2 | 23.0 | 23.3 | 21.7 | 22.6 | 22.0 | 22.9 | 23.1 |
| 4H | 21.9 | 22.8 | 22.2 | 23.1 | 23.3 | 21.8 | 22.7 | 22.1 | 22.9 | 23.1 |
| 6H | 22.0 | 22.8 | 22.3 | 23.0 | 23.3 | 21.8 | 22.7 | 22.1 | 22.9 | 23.2 |
| 8H | 21.9 | 22.7 | 22.2 | 23.0 | 23.2 | 21.8 | 22.6 | 22.1 | 22.9 | 23.1 |
| 12H | 21.9 | 22.6 | 22.2 | 22.9 | 23.2 | 21.8 | 22.5 | 22.1 | 22.8 | 23.1 |
| 4H 2H | 21.7 | 22.6 | 22.0 | 22.8 | 23.0 | 21.4 | 22.3 | 21.7 | 22.6 | 22.8 |
| 3H | 21.8 | 22.6 | 22.1 | 22.9 | 23.1 | 21.7 | 22.4 | 22.0 | 22.7 | 23.0 |
| 4H | 21.9 | 22.6 | 22.3 | 22.9 | 23.3 | 21.8 | 22.5 | 22.2 | 22.8 | 23.1 |
| 6H | 22.0 | 22.6 | 22.4 | 23.0 | 23.3 | 21.9 | 22.5 | 22.3 | 22.9 | 23.2 |
| 8H | 22.0 | 22.6 | 22.4 | 22.9 | 23.3 | 21.9 | 22.5 | 22.3 | 22.8 | 23.2 |
| 12H | 21.9 | 22.5 | 22.4 | 22.8 | 23.2 | 21.8 | 22.4 | 22.3 | 22.7 | 23.1 |
| 8H 4H | 21.9 | 22.5 | 22.3 | 22.9 | 23.2 | 21.8 | 22.4 | 22.2 | 22.7 | 23.1 |
| 6H | 22.0 | 22.5 | 22.5 | 22.9 | 23.3 | 21.9 | 22.4 | 22.4 | 22.8 | 23.2 |
| 8H | 22.0 | 22.4 | 22.5 | 22.8 | 23.3 | 21.9 | 22.3 | 22.3 | 22.7 | 23.2 |
| 12H | 22.0 | 22.3 | 22.4 | 22.8 | 23.2 | 21.9 | 22.2 | 22.3 | 22.7 | 23.1 |
| 12H 4H | 21.9 | 22.4 | 22.3 | 22.8 | 23.2 | 21.8 | 22.3 | 22.2 | 22.7 | 23.0 |
| 6H | 22.0 | 22.4 | 22.5 | 22.8 | 23.3 | 21.9 | 22.3 | 22.3 | 22.7 | 23.2 |
| 8H | 22.0 | 22.3 | 22.4 | 22.8 | 23.2 | 21.9 | 22.2 | 22.3 | 22.7 | 23.1 |
| Variations with the observer position at spacings: | | | | | | | | | | |
| S = 1.0H | + 2.3 / - 5.1 | | | | | + 2.3 / - 4.8 | | | | |
| 1.5H | + 4.8 / - 5.1 | | | | | + 4.8 / - 4.7 | | | | |
| 2.0H | + 1.6 / - 0.5 | | | | | + 1.2 / - 0.4 | | | | |

CIE Pub.117 Corrected 846.2 lm Total Lamp Luminous Flux. (8log(F/F0) = -0.6)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMAN
 Test Date:2020-06-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.443m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

| | | |
|--|-------------|-------------------|
| Test:U:240.7V I:0.0390A P:9.150W PF:0.9640 Lamp Flux:846.25x1 lm | | |
| NAME: LED-DL10WCOB-CW-W | TYPE:10W | WEIGHT: |
| DIM.: | SPEC.:5700K | SERIAL No.:1 |
| MFR.: | SUR.:0.0325 | PROTECTION ANGLE: |


| REFLECTANCE | | | | | | | | | | |
|----------------------------------|---|-----|-----------|-----|-----|-----|---------------|-----|-----|--------|
| Ceiling | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0 |
| Walls | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0 |
| Working plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0 |
| ROOM INDEX | UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$ | | | | | | | | | |
| k = 0.60 | 84 | 77 | 73 | 84 | 77 | 73 | 83 | 77 | 73 | 69 |
| 0.80 | 92 | 86 | 82 | 91 | 85 | 82 | 90 | 85 | 81 | 77 |
| 1.00 | 97 | 91 | 87 | 96 | 90 | 87 | 95 | 90 | 86 | 82 |
| 1.25 | 101 | 96 | 92 | 100 | 95 | 91 | 98 | 94 | 91 | 86 |
| 1.50 | 104 | 99 | 95 | 103 | 98 | 95 | 101 | 97 | 94 | 89 |
| 2.00 | 107 | 103 | 99 | 106 | 102 | 99 | 103 | 100 | 97 | 92 |
| 2.50 | 109 | 105 | 102 | 108 | 104 | 101 | 104 | 101 | 99 | 93 |
| 3.00 | 111 | 107 | 104 | 109 | 106 | 103 | 106 | 103 | 101 | 94 |
| 4.00 | 113 | 110 | 108 | 111 | 108 | 106 | 107 | 105 | 104 | 96 |
| 5.00 | 114 | 112 | 110 | 112 | 110 | 108 | 108 | 107 | 105 | 98 |
| ROOM INDEX | UF(total) | | | | | | | | | Direct |
| According to DIN EN 13032-2 2004 | | | Suspended | | | | SHRNOM = 1.25 | | | |

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMAN
 Test Date:2020-06-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.443m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

| | | |
|--|-------------|-------------------|
| Test:U:240.7V I:0.0390A P:9.150W PF:0.9640 Lamp Flux:846.25x1 lm | | |
| NAME: LED-DL10WCOB-CW-W | TYPE:10W | WEIGHT: |
| DIM.: | SPEC.:5700K | SERIAL No.:1 |
| MFR.: | SUR.:0.0325 | PROTECTION ANGLE: |

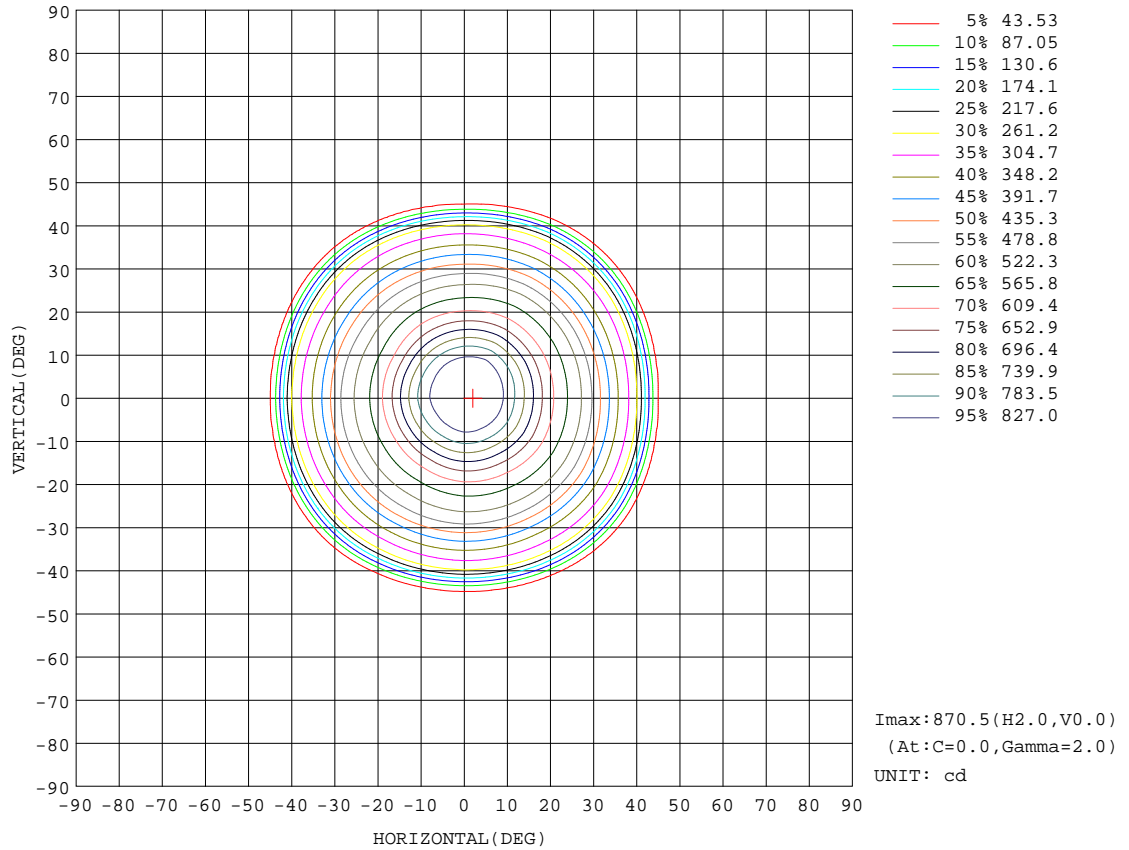


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMAN
 Test Date: 2020-06-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 9.443m [K=1.0000]
 Remarks:

AAI Figure

| | | |
|--|-------------|-------------------|
| Test:U:240.7V I:0.0390A P:9.150W PF:0.9640 Lamp Flux:846.25x1 lm | | |
| NAME: LED-DL10WCOB-CW-W | TYPE:10W | WEIGHT: |
| DIM.: | SPEC.:5700K | SERIAL No.:1 |
| MFR.: | SUR.:0.0325 | PROTECTION ANGLE: |

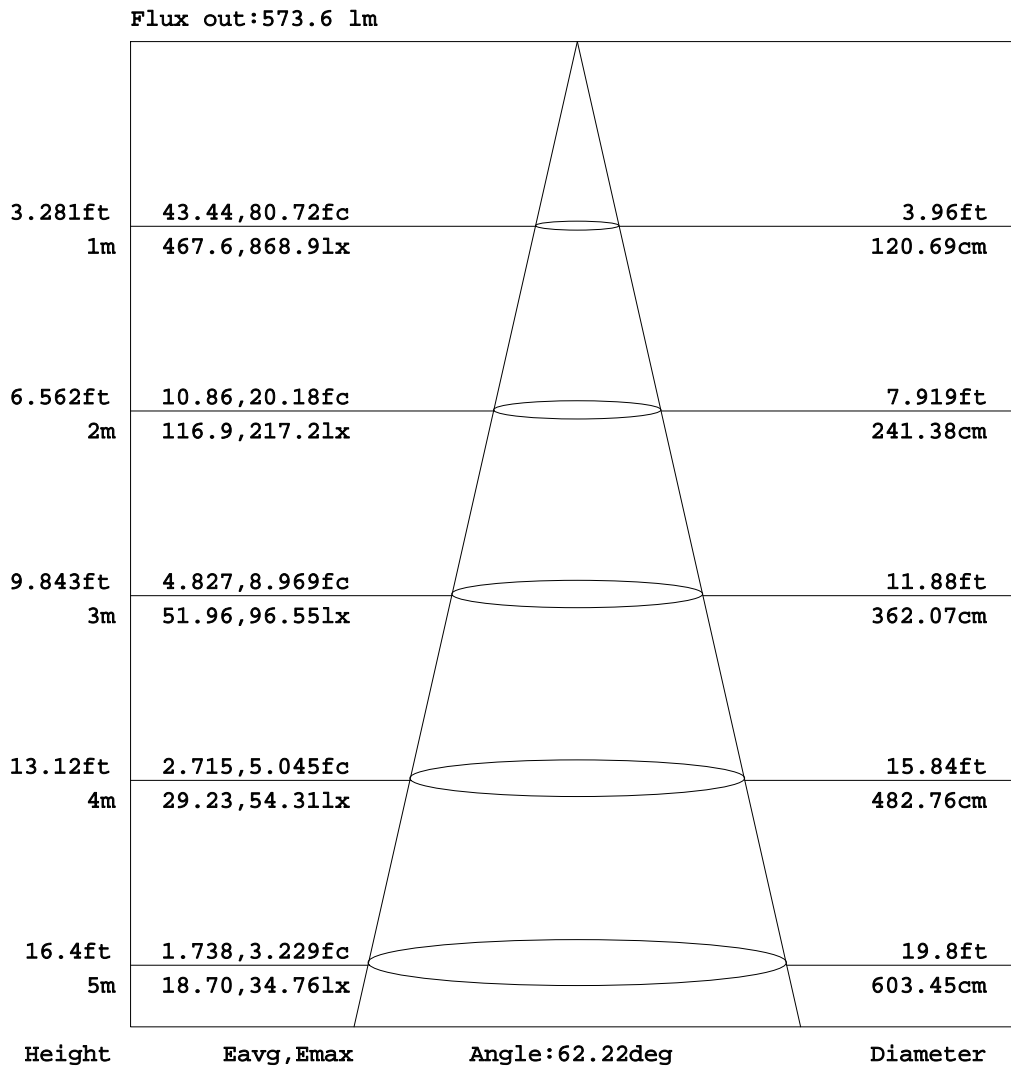


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMAN
 Test Date:2020-06-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.443m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


| | | |
|--|-------------|-------------------|
| Test:U:240.7V I:0.0390A P:9.150W PF:0.9640 Lamp Flux:846.25x1 lm | | |
| NAME: LED-DL10WCOB-CW-W | TYPE:10W | WEIGHT: |
| DIM.: | SPEC.:5700K | SERIAL No.:1 |
| MFR.: | SUR.:0.0325 | PROTECTION ANGLE: |

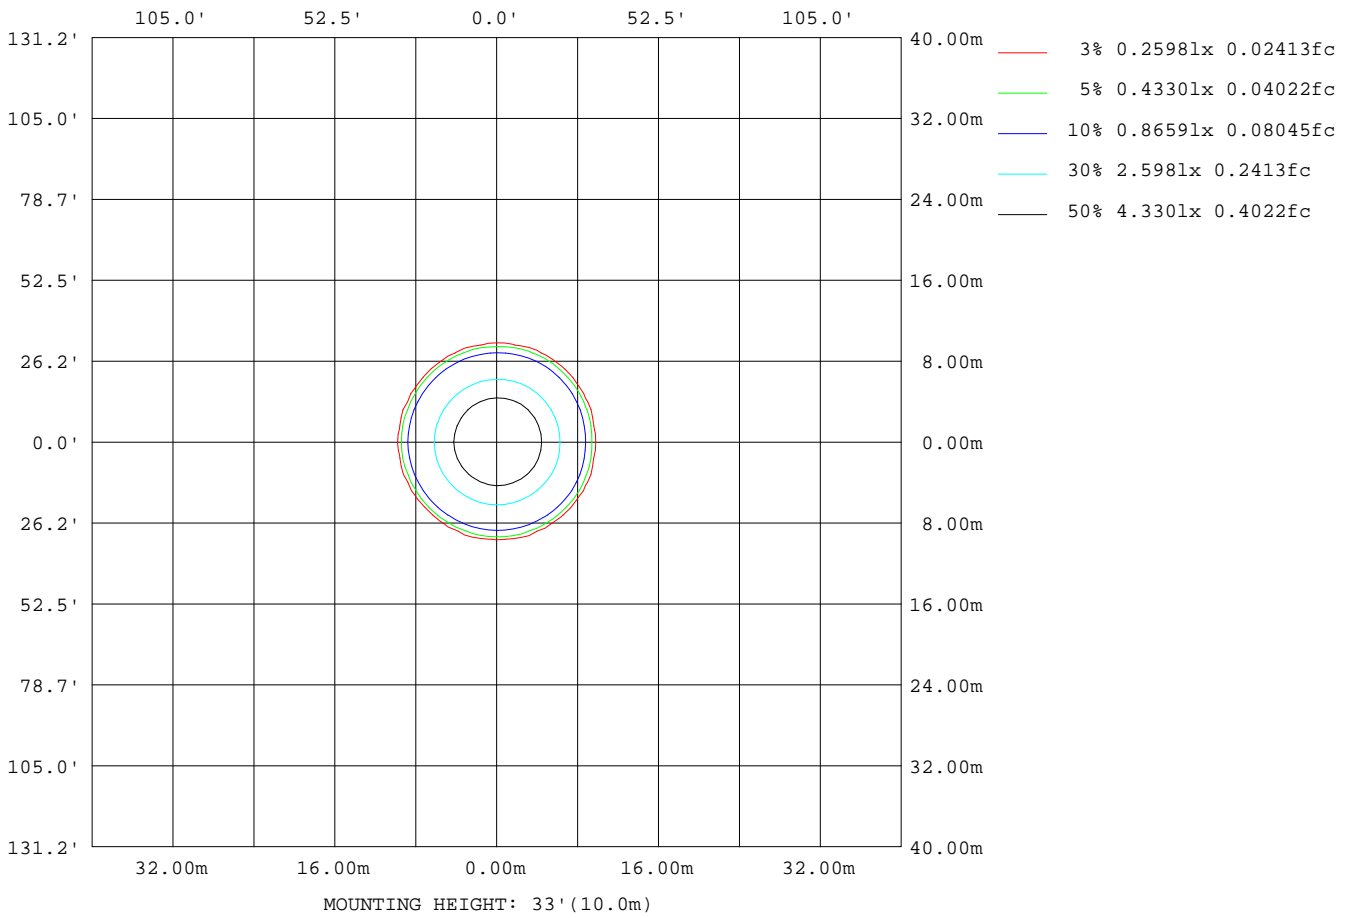

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMAN
 Test Date:2020-06-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.443m [K=1.0000]
 Remarks:

Planar Illuminance Curve

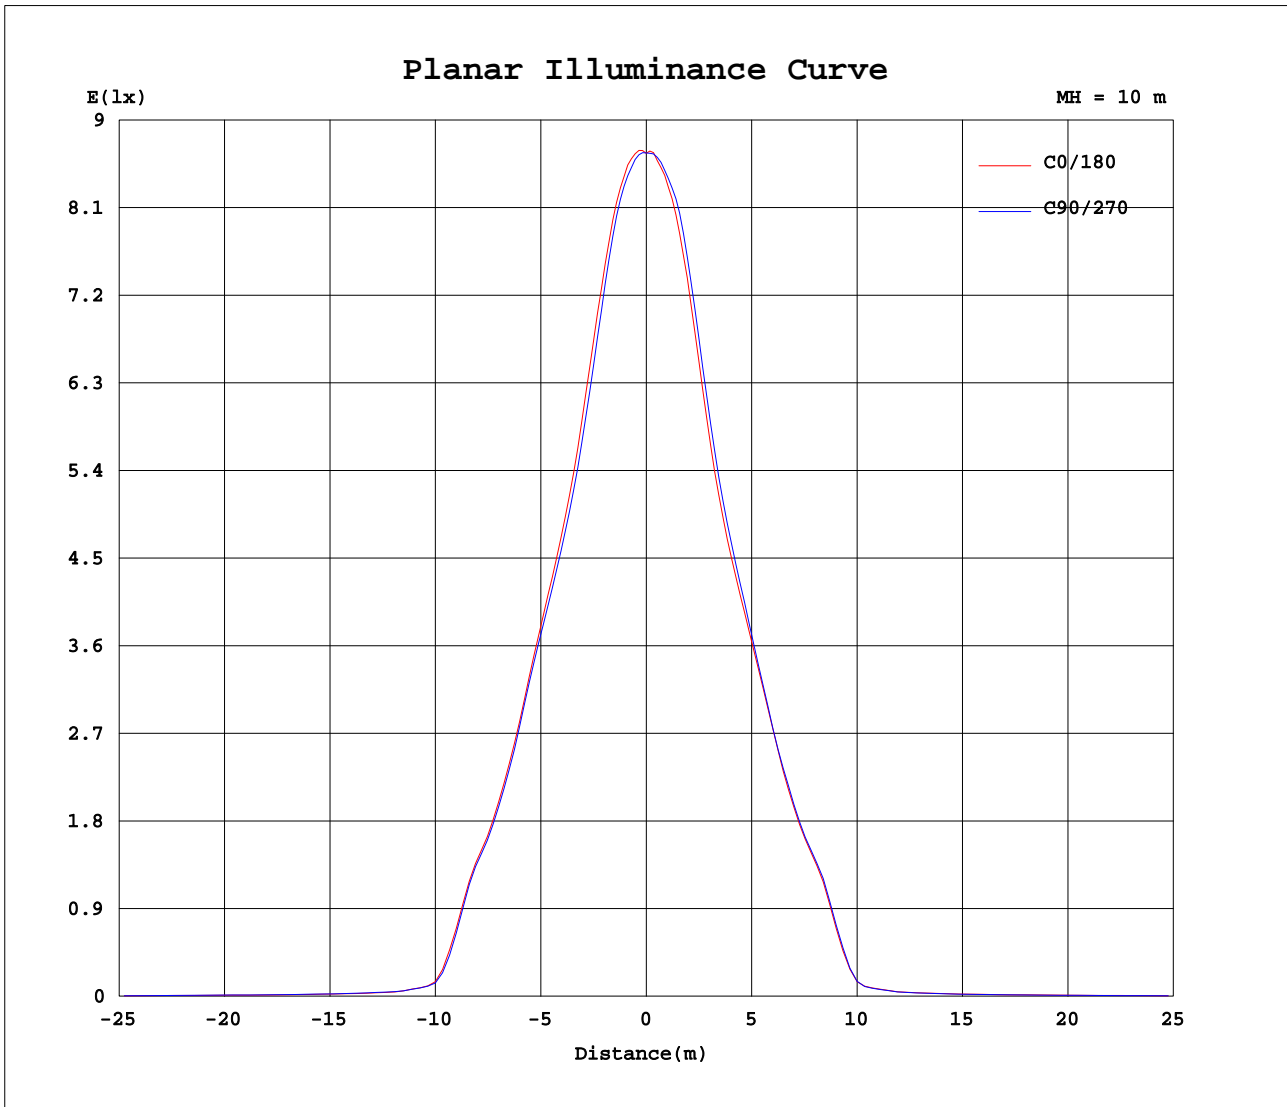

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMAN
 Test Date: 2020-06-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 9.443m [K=1.0000]
 Remarks:

