


36W LED LIGHT PANEL


Applications:

Office, Healthcare, Retail, Domestic & Commercial.

Specifications

LED Chip:	Epistar
Life Expectancy:	50,000 Hours
Working Temperature:	-20°C to +40°C
Power Factor:	>0.95
Approvals:	SAA/C-tick (RCM)
Voltage:	AC85-265V
LED Driver:	Lifud SAA approved
Replaces:	72W
Beam Angle:	160°
IP Rating:	IP40
Carton Quantity:	5
Frame Colour:	White
Heat Sink:	Aluminium

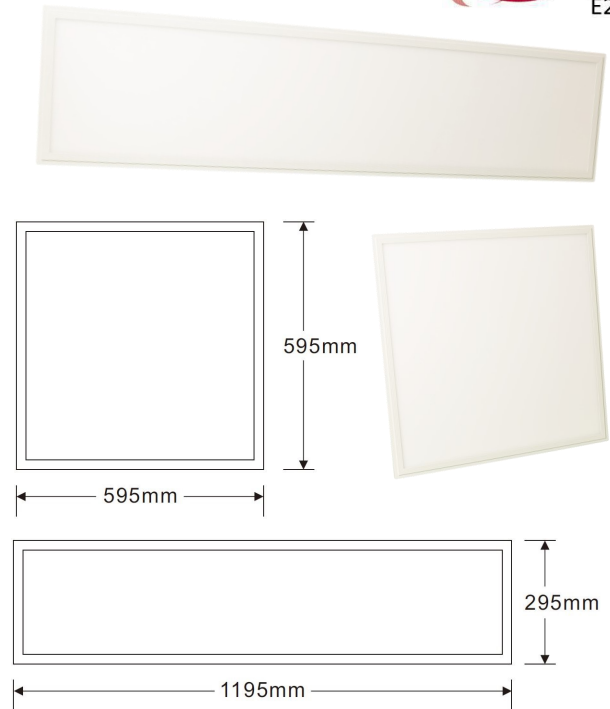

Light Guard Protector:	3mm
UGR:	<22
CRI:	>80
Connection:	1.2m Power Cable with SAA plug

Code	Wattage	Lumen Output	Dimensions	Colour Temp	Nett Wt	Warranty
LED-LPE36W-60SQ	36W	3600LM	595mm x 595mm	4000K	3.2kg	3 Years
LED-LPE36W-60SQ-CW	36W	3600LM	595mm x 595mm	6000K	3.2kg	5 Years
LED-LPE36W-60SQ-5K	36W	3600LM	595mm x 595mm	5000K	3.2kg	5 Years
LED-LPE36W-120/30	36W	3600LM	1195mm x 295mm	4000K	3.4kg	5 Years
LED-LPE36W-120/30-CW	36W	3600LM	1195mm x 295mm	6000K	3.4kg	5 Years
LED-LPE36W-120/30-5K	36W	3600LM	1195mm x 295mm	5000K	3.4kg	5 Years
LED-LPE36W-120/30-WW	36W	3600LM	1195mm x 295mm	3000K	3.4kg	5 Years