

BACKLIT LED LIGHT PANEL




The POWER-LITE® LED back lit panel is produced using state of the art automated production lines, to provide a cost effective LED panel for all applications.

Applications:

Office, Healthcare, Retail, Domestic & Commercial.

Specifications

LED Chip:	SMD CR180
Life Expectancy:	50,000 Hours
Working Temperature:	-20°C to +45°C
Power Factor:	>0.9
Lumens:	3600LM
Approvals:	SAA/C-tick (RCM)
Voltage:	AC200-240V
LED Driver:	Flicker free
Replaces:	36W replaces 72W
Dimensions:	295mm x 1195mm
Beam Angle:	120°
IP Rating:	IP20
IC Rating:	IC-4
Frame Colour:	White
CRI:	>80

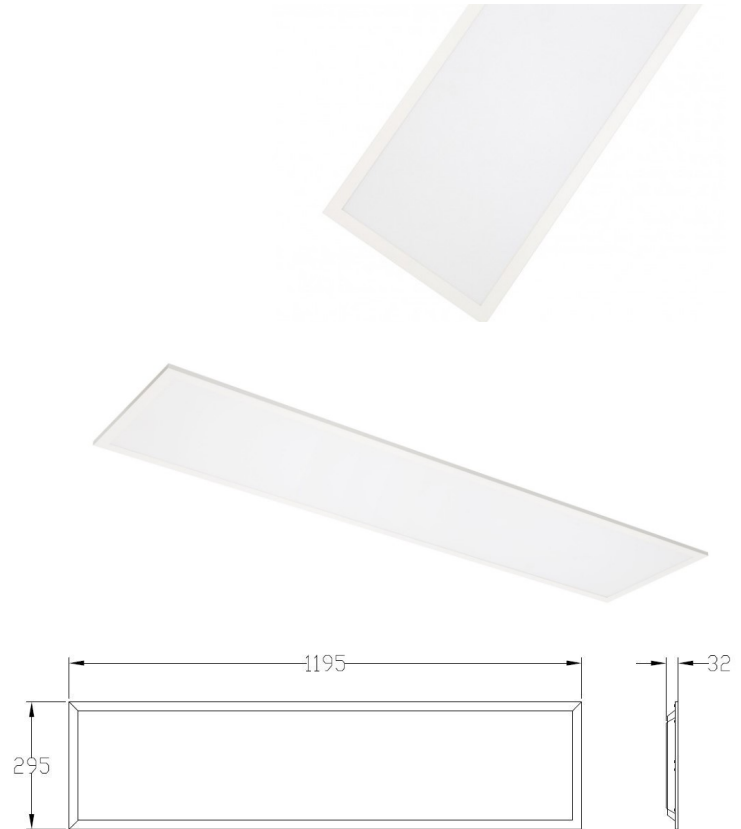

BLP36W

NOTE:

- The driver for these LED panels is NOT IC-4 rated.
- These products are compatible with the following: PBS-413-E, LED-LPF120/30, LP-EP, Motion Sensors.

Code	Wattage	Description	Connection	Dimmable	Colour Temp	Nett Weight	Carton Qty	Warranty
BLP36W-120/30	36W	LED Backlit Panel	1.5m Power cable with SAA plug	No	4000k	2.5kg	5	3 Years
BLP36W-120/30-5K	36W	LED Backlit Panel	1.5m Power cable with SAA plug	No	5000k	2.5kg	5	3 Years
BLP36W-120/30-CW	36W	LED Backlit Panel	1.5m Power cable with SAA plug	No	6000k	2.5kg	5	3 Years
BLP36W-DALI	-	DALI Dimmable Driver for 36W LED Backlit Panels	-	-	-	-	1	3 Years