
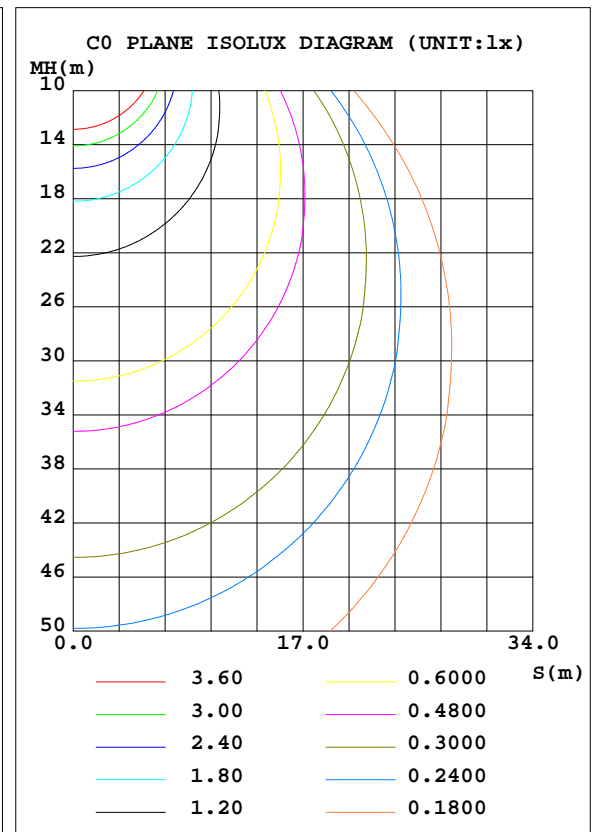


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.00V I:0.0810A P:17.000W PF:0.9210 Freq:50.00Hz Lamp Flux:1724.75x1 lm		
NAME: O18W 6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:295	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 101.46 lm/W			
MODEL		I _{max} (cd)	595.1	S/MH(C0/180)	1.26
NOMINAL POWER(W)	18	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	1724.7	η UP, DN(C0-180)	0.8,49.2
NOMINAL FLUX(lm)	1724.75	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.8,49.2
LAMPS INSIDE	1	η up(%)	1.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down(%)	98.4	CIBSE SHR MAX	1.35

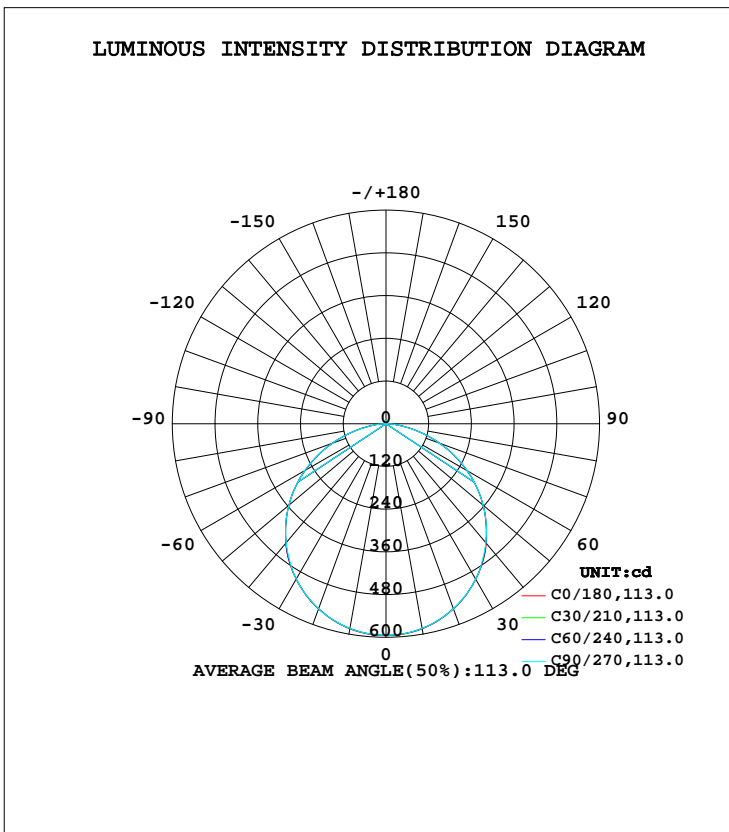

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:16 September 2021

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:10.890m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	585.0	583.9	583.6	583.9	585.0	583.9	583.6	583.9	0- 10	56.25	56.25	3.26,3.26
20	554.1	553.1	553.1	553.1	554.1	553.1	553.1	553.1	10- 20	161.2	217.4	12.6,12.6
30	505.0	503.9	504.3	503.9	505.0	503.9	504.3	503.9	20- 30	244.7	462.1	26.8,26.8
40	437.8	436.7	436.4	436.7	437.8	436.7	436.4	436.7	30- 40	295.6	757.7	43.9,43.9
50	356.6	356.1	356.1	356.1	356.6	356.1	356.1	356.1	40- 50	306.9	1065	61.7,61.7
60	262.5	263.0	263.3	263.0	262.5	263.0	263.3	263.0	50- 60	277.9	1343	77.8,77.8
70	160.7	160.4	160.3	160.4	160.7	160.4	160.3	160.4	60- 70	209.9	1552	90,90
80	61.60	60.94	60.15	60.94	61.60	60.94	60.15	60.94	70- 80	115.4	1668	96.7,96.7
90	6.173	4.811	3.572	4.811	6.173	4.811	3.572	4.811	80- 90	29.00	1697	98.4,98.4
100	2.118	2.110	2.106	2.110	2.118	2.110	2.106	2.110	90-100	2.362	1699	98.5,98.5
110	3.010	3.022	3.047	3.022	3.010	3.022	3.047	3.022	100-110	2.705	1702	98.7,98.7
120	3.985	4.021	4.072	4.021	3.985	4.021	4.072	4.021	110-120	3.487	1705	98.9,98.9
130	5.036	5.093	5.163	5.093	5.036	5.093	5.163	5.093	120-130	4.077	1709	99.1,99.1
140	6.087	6.163	6.239	6.163	6.087	6.163	6.239	6.163	130-140	4.351	1714	99.4,99.4
150	7.082	7.148	7.234	7.148	7.082	7.148	7.234	7.148	140-150	4.174	1718	99.6,99.6
160	8.038	8.033	8.115	8.033	8.038	8.033	8.115	8.033	150-160	3.507	1722	99.8,99.8
170	8.971	8.814	8.834	8.814	8.971	8.814	8.834	8.814	160-170	2.388	1724	100,100
180	9.181	9.082	9.086	9.082	9.181	9.082	9.086	9.082	170-180	0.8576	1725	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 912.25 lm

%lum = 52.9%
%lamp = 52.9%

Conical surface Flux(120deg): 1342.6 lm


%lum = 77.8%
%lamp = 77.8%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:16 September 2021

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:10.890m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.00V I:0.0810A P:17.000W PF:0.9210 Freq:50.00Hz Lamp Flux:1724.75x1 lm		
NAME: O18W 6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:295	Shielding Angle:

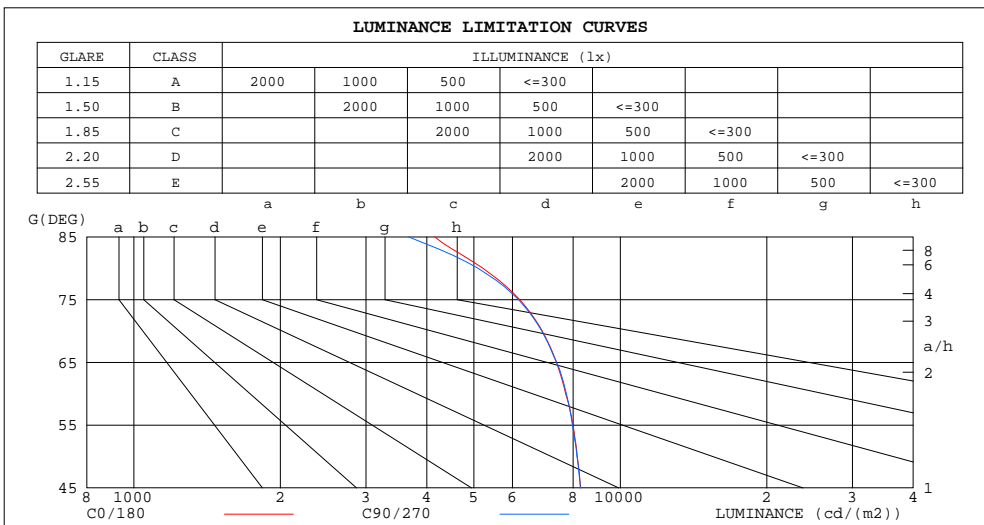

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4152	3666
80	5217	5094
75	6208	6175
70	6911	6894
65	7392	7394
60	7719	7744
55	7988	7974
50	8159	8147
45	8291	8278


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:16 September 2021

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:10.890m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.00V I:0.0810A P:17.000W PF:0.9210 Freq:50.00Hz Lamp Flux:1724.75x1 lm		
NAME: O18W 6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:295	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	.99	.96	1.01	.97	.94	.97	.93	.91	.92	.90	.88	.89	.87	.85	.82
2.0	.90	.83	.78	.88	.82	.77	.84	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.65	.78	.70	.64	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.55	.69	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.36	.47	.40	.35	.45	.39	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

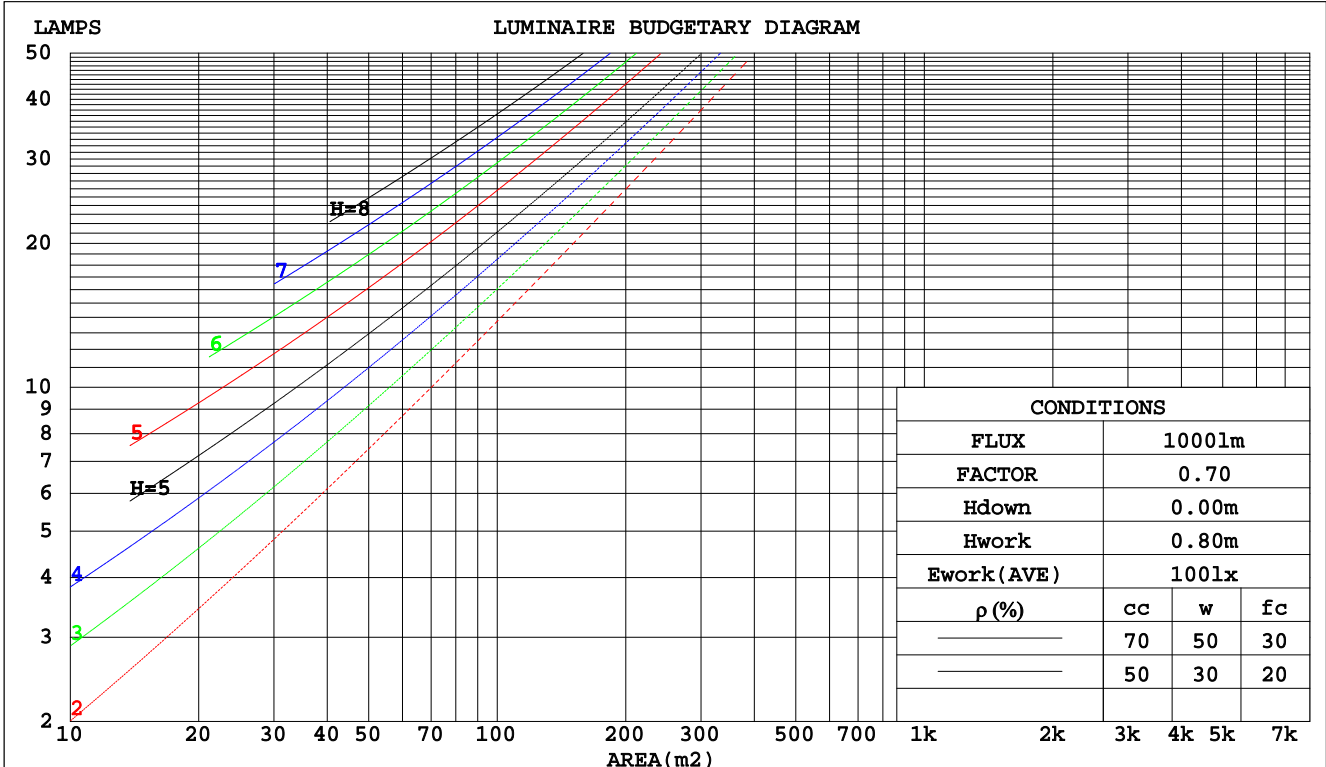

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:16 September 2021

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:10.890m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:230.00V I:0.0810A P:17.000W PF:0.9210 Freq:50.00Hz Lamp Flux:1724.75x1 lm		
NAME: O18W 6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:295	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.307	.174	.055	.299	.171	.054	.285	.163	.052	.272	.157	.050	.260	.151	.049	
2.0	.289	.159	.049	.283	.156	.048	.270	.150	.047	.259	.145	.045	.248	.140	.044	
3.0	.268	.143	.043	.262	.141	.042	.251	.136	.041	.241	.132	.041	.231	.128	.040	
4.0	.248	.129	.038	.243	.127	.038	.233	.123	.037	.224	.120	.036	.215	.117	.036	
5.0	.229	.117	.034	.225	.115	.034	.216	.112	.033	.208	.110	.033	.200	.107	.032	
6.0	.213	.107	.031	.209	.105	.030	.201	.103	.030	.193	.101	.030	.187	.098	.029	
7.0	.198	.098	.028	.194	.097	.028	.187	.095	.027	.181	.093	.027	.175	.091	.027	
8.0	.185	.090	.025	.182	.090	.025	.175	.088	.025	.169	.086	.025	.164	.084	.024	
9.0	.174	.084	.023	.171	.083	.023	.165	.081	.023	.159	.080	.023	.154	.078	.023	
10.0	.163	.078	.022	.160	.078	.022	.155	.076	.021	.150	.075	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.203	.203	.203	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.193	.169	.147	.165	.145	.127	.113	.100	.088	.065	.058	.051	.021	.019	.016	
2.0	.184	.144	.111	.158	.124	.096	.108	.086	.067	.062	.050	.039	.020	.016	.013	
3.0	.177	.127	.087	.152	.109	.076	.104	.076	.053	.060	.044	.031	.019	.014	.010	
4.0	.169	.114	.071	.145	.098	.062	.100	.068	.044	.058	.040	.026	.019	.013	.008	
5.0	.162	.103	.060	.139	.089	.052	.096	.062	.037	.055	.037	.022	.018	.012	.007	
6.0	.155	.095	.052	.133	.082	.045	.092	.058	.032	.053	.034	.019	.017	.011	.006	
7.0	.148	.088	.046	.127	.076	.040	.088	.053	.028	.051	.032	.017	.017	.010	.006	
8.0	.141	.082	.042	.122	.071	.036	.084	.050	.026	.049	.030	.015	.016	.010	.005	
9.0	.135	.077	.038	.117	.067	.033	.081	.047	.024	.047	.028	.014	.015	.009	.005	
10.0	.130	.073	.035	.112	.063	.031	.078	.045	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:16 September 2021

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:10.890m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.00V I:0.0810A P:17.000W PF:0.9210 Freq:50.00Hz Lamp Flux:1724.75x1 lm										
NAME: O18W 6000K					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:295			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.0	21.5	20.3	21.8	22.0	20.0	21.5	20.3	21.8	22.0
3H	21.5	22.9	21.8	23.1	23.4	21.5	22.9	21.8	23.1	23.4
4H	22.1	23.4	22.4	23.6	23.9	22.0	23.4	22.4	23.6	23.9
6H	22.4	23.6	22.8	23.9	24.3	22.4	23.6	22.7	23.9	24.2
8H	22.5	23.7	22.9	24.0	24.3	22.5	23.7	22.8	24.0	24.3
12H	22.5	23.7	22.9	24.0	24.4	22.5	23.6	22.9	24.0	24.3
4H 2H	20.6	21.9	21.0	22.2	22.5	20.6	21.9	21.0	22.2	22.5
3H	22.3	23.4	22.6	23.7	24.1	22.3	23.4	22.6	23.7	24.1
4H	22.9	24.0	23.3	24.3	24.7	22.9	24.0	23.3	24.3	24.7
6H	23.4	24.3	23.8	24.7	25.1	23.4	24.3	23.8	24.7	25.1
8H	23.5	24.4	24.0	24.8	25.2	23.5	24.4	23.9	24.8	25.2
12H	23.6	24.4	24.1	24.8	25.3	23.6	24.4	24.0	24.8	25.2
8H 4H	23.2	24.0	23.6	24.4	24.9	23.2	24.0	23.6	24.4	24.8
6H	23.8	24.5	24.2	24.9	25.4	23.7	24.5	24.2	24.9	25.4
8H	24.0	24.6	24.5	25.1	25.5	23.9	24.6	24.4	25.0	25.5
12H	24.1	24.6	24.6	25.1	25.6	24.0	24.6	24.5	25.1	25.6
12H 4H	23.2	24.0	23.6	24.4	24.8	23.2	24.0	23.6	24.4	24.8
6H	23.8	24.4	24.3	24.9	25.4	23.8	24.4	24.3	24.9	25.4
8H	24.0	24.6	24.5	25.1	25.6	24.0	24.5	24.5	25.0	25.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 1725 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.9)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:16 September 2021

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:10.890m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.00V I:0.0810A P:17.000W PF:0.9210 Freq:50.00Hz Lamp Flux:1724.75x1 lm		
NAME: O18W 6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:295	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	65	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	80	93	85	79	89	82	77	69
2.50	98	91	85	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	96	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	97	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:16 September 2021

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:10.890m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.00V I:0.0810A P:17.000W PF:0.9210 Freq:50.00Hz Lamp Flux:1724.75x1 lm		
NAME: O18W 6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:295	Shielding Angle:

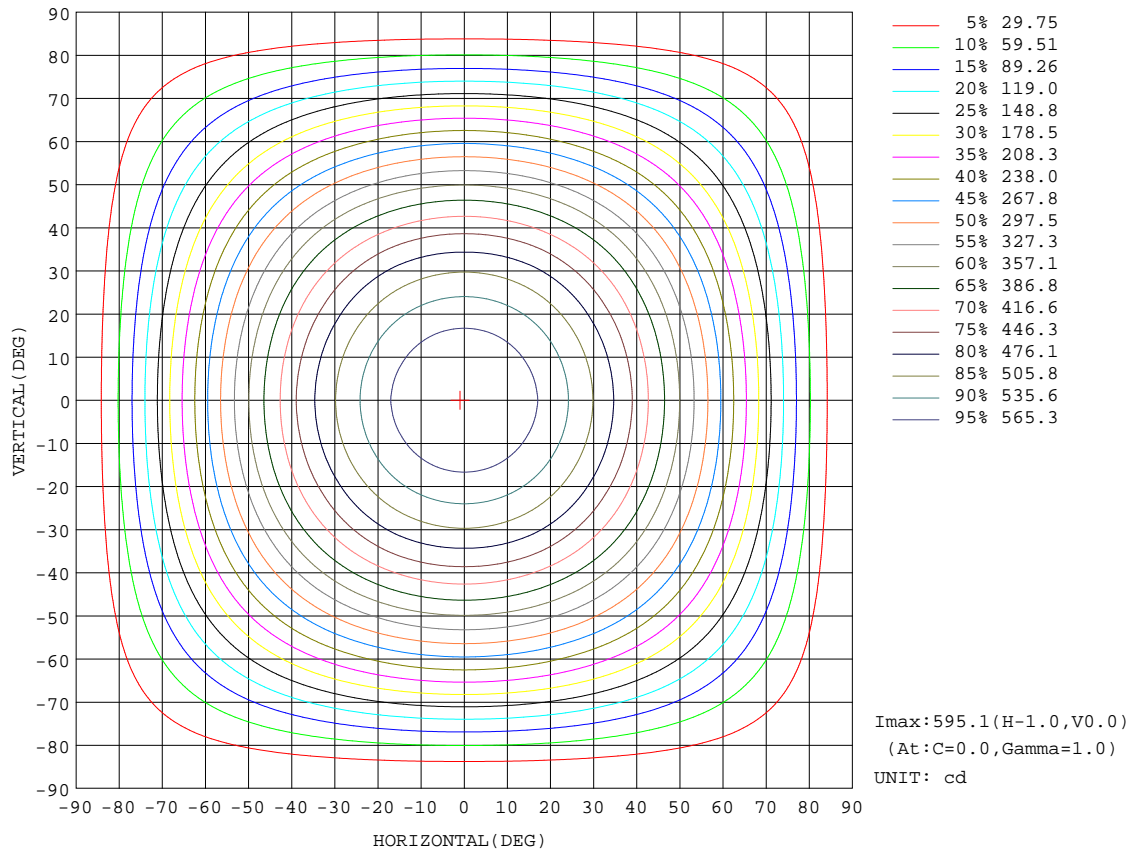


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:16 September 2021

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:10.890m [K=1.0000]
 Remarks:

AAI Figure

Test:U:230.00V I:0.0810A P:17.000W PF:0.9210 Freq:50.00Hz Lamp Flux:1724.75x1 lm		
NAME: O18W 6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:295	Shielding Angle:

Flux out:1265 lm

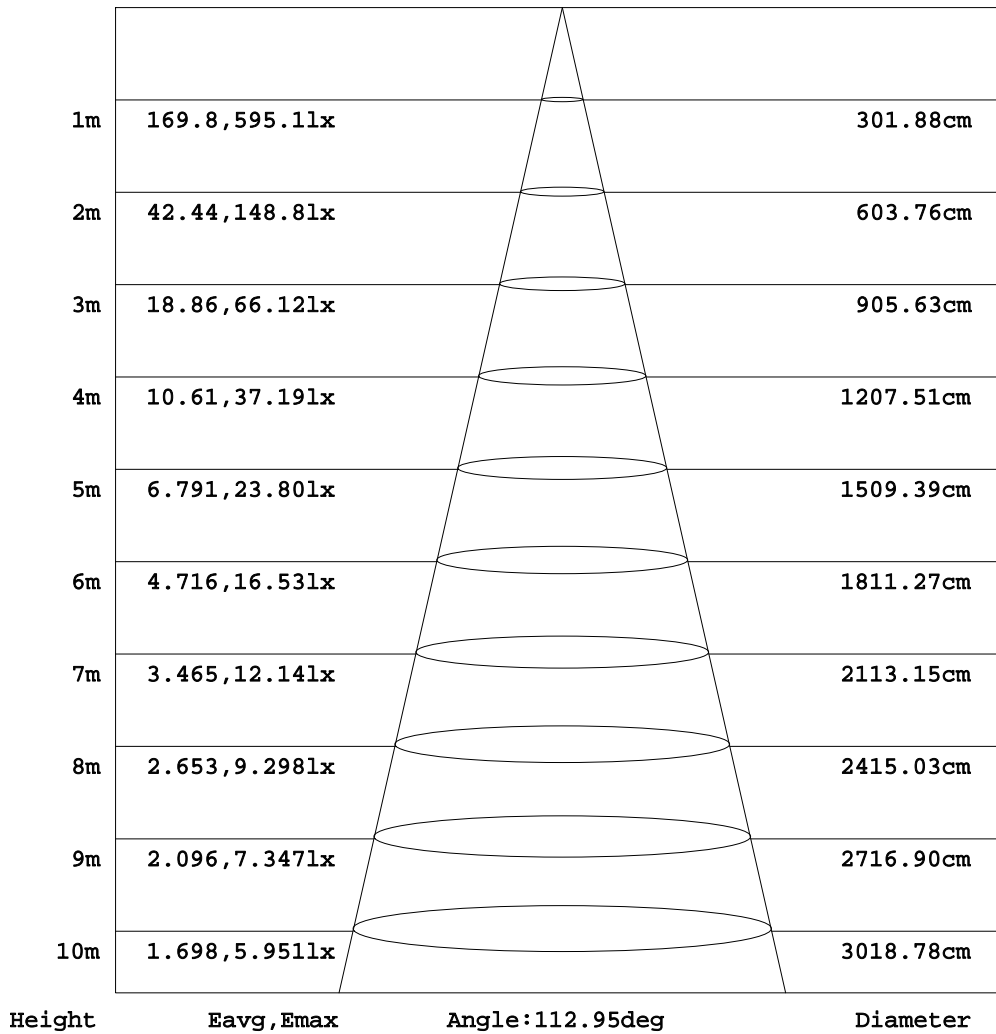


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:16 September 2021

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:10.890m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:230.00V I:0.0810A P:17.000W PF:0.9210 Freq:50.00Hz Lamp Flux:1724.75x1 lm		
NAME: O18W 6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:295	Shielding Angle:

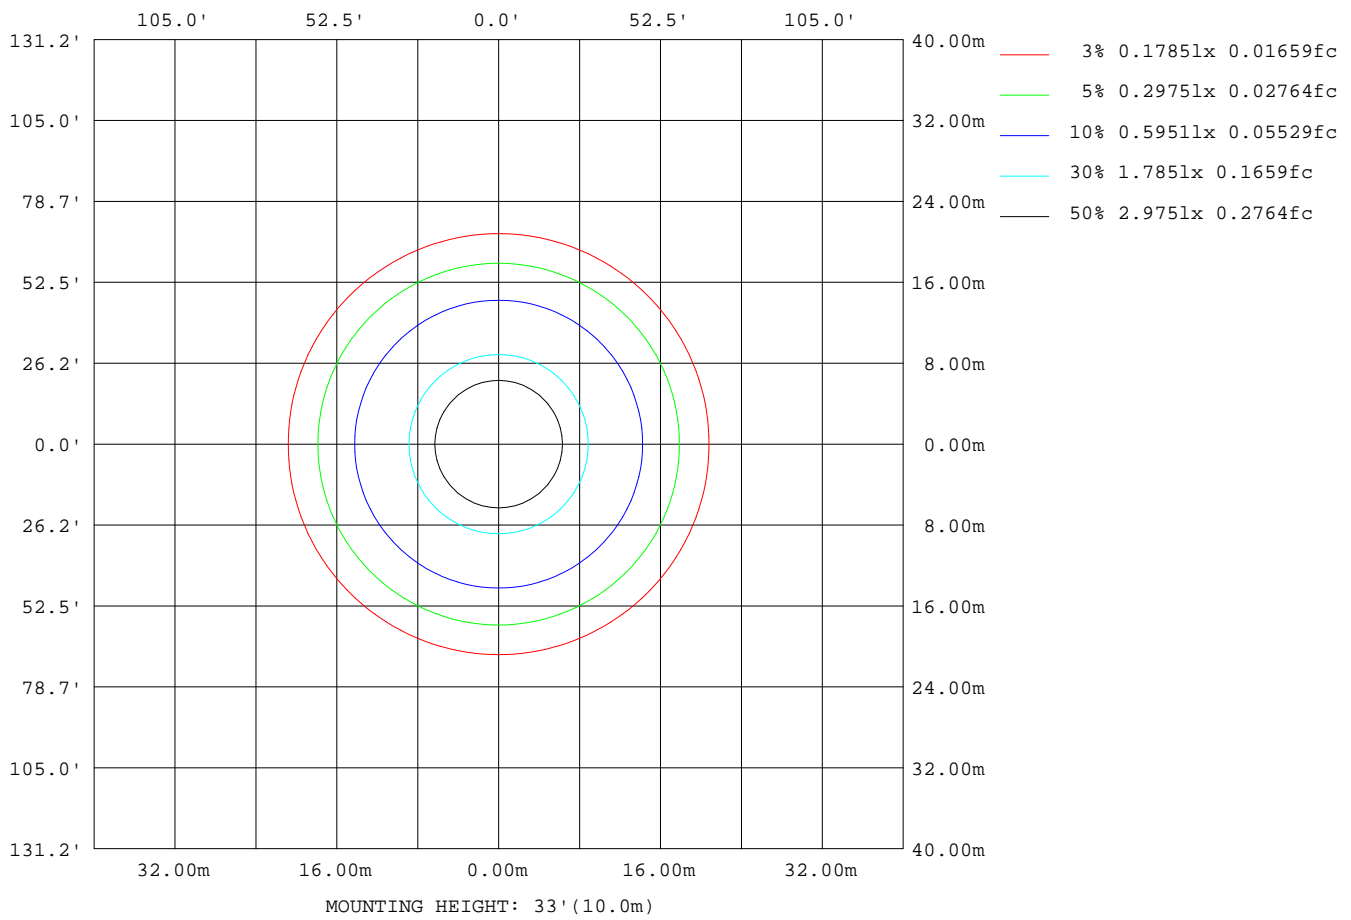

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:16 September 2021

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:10.890m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:230.00V I:0.0810A P:17.000W PF:0.9210 Freq:50.00Hz Lamp Flux:1724.75x1 lm		
NAME: O18W 6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:295	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	7392
L_0~180(75)av	6208
L_0~180(85)av	4152
L_90~270(65)av	7394
L_90~270(75)av	6175
L_90~270(85)av	3666
L_45(65)av	7389
L_45(75)av	6190
L_45(85)av	3922

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:16 September 2021

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:10.890m [K=1.0000]
 Remarks:

Planar Illuminance Curve

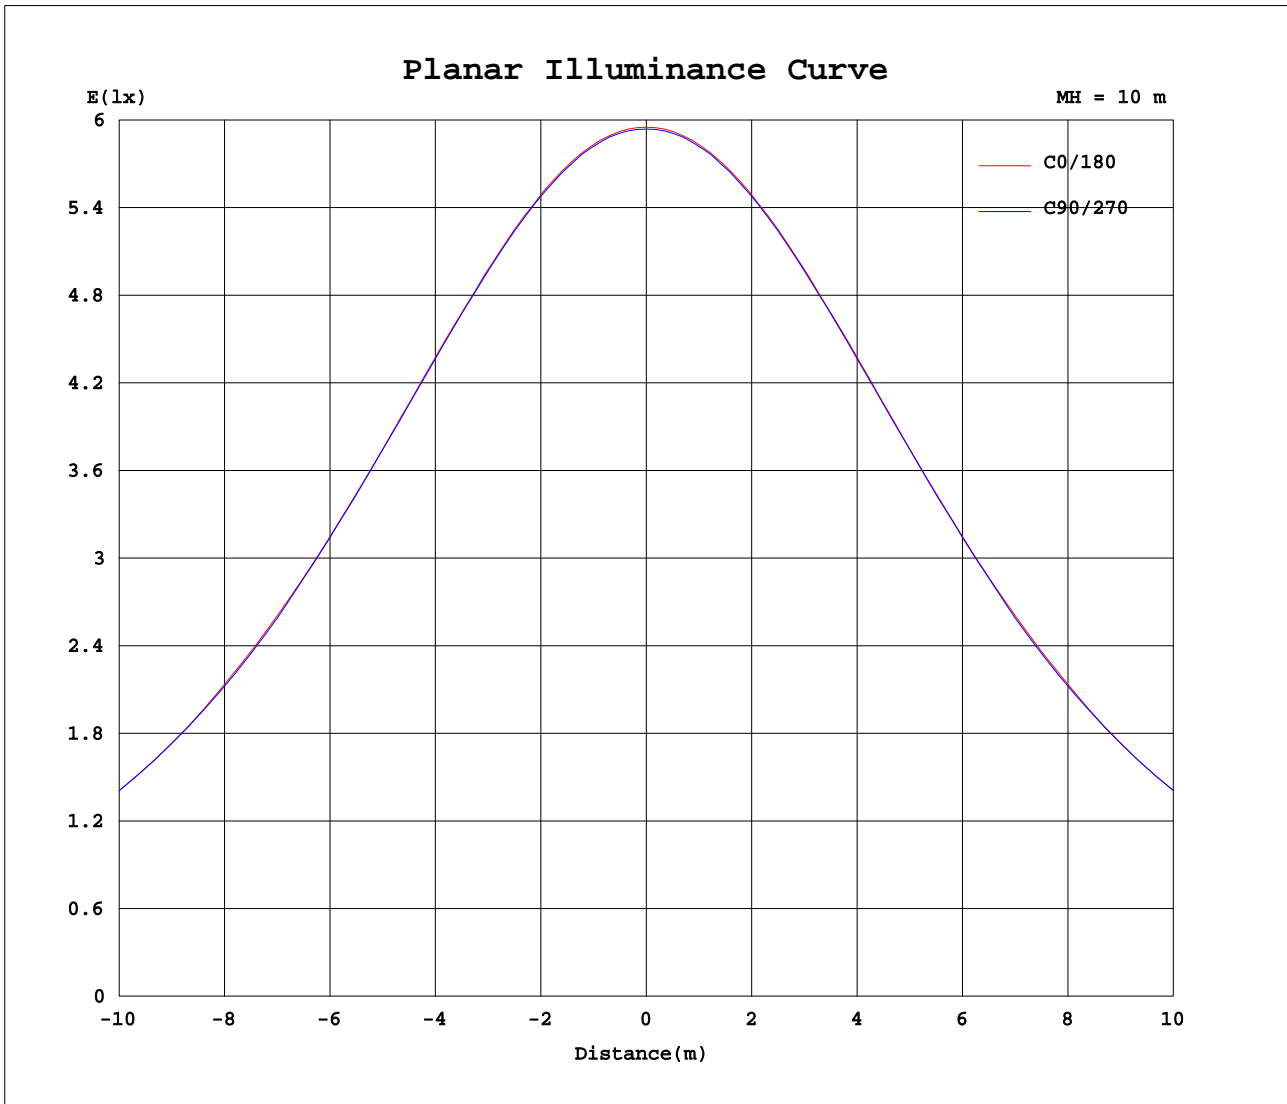

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 16 September 2021

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity: 65.0%
 Test Distance: 10.890m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.00V I:0.0810A P:17.000W PF:0.9210 Freq:50.00Hz Lamp Flux:1724.75x1 lm		
NAME: O18W 6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:295	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	595	594	594	594	594	594	595	594	594	594	594	594						
5	593	592	592	592	592	592	593	592	592	592	592	592						
10	585	584	584	584	584	584	585	584	584	584	584	584						
15	572	571	571	571	571	571	572	571	571	571	571	571						
20	554	553	553	553	553	553	554	553	553	553	553	553						
25	532	531	531	531	531	531	532	531	531	531	531	531						
30	505	504	504	504	504	504	505	504	504	504	504	504						
35	474	472	473	471	473	472	474	472	473	471	473	472						
40	438	436	437	436	437	436	438	436	437	436	437	436						
45	399	398	398	398	398	398	399	398	398	398	398	398						
50	357	356	356	356	356	356	357	356	356	356	356	356						
55	312	311	311	311	311	311	312	311	311	311	311	311						
60	262	263	263	263	263	263	262	263	263	263	263	263						
65	212	213	212	212	212	213	212	213	212	212	212	213						
70	161	160	160	160	160	160	161	160	160	160	160	160						
75	109	109	109	109	109	109	109	109	109	109	109	109						
80	61.6	61.2	60.6	60.2	60.6	61.2	61.6	61.2	60.6	60.2	60.6	61.2						
85	24.6	23.9	22.6	21.7	22.6	23.9	24.6	23.9	22.6	21.7	22.6	23.9						
90	6.17	5.38	4.24	3.57	4.24	5.38	6.17	5.38	4.24	3.57	4.24	5.38						
95	1.69	1.70	1.68	1.68	1.68	1.70	1.69	1.70	1.68	1.68	1.68	1.70						
100	2.12	2.11	2.11	2.11	2.11	2.11	2.12	2.11	2.11	2.11	2.11	2.11						
105	2.55	2.55	2.56	2.56	2.56	2.55	2.55	2.55	2.56	2.56	2.56	2.55						
110	3.01	3.02	3.03	3.05	3.03	3.02	3.01	3.02	3.03	3.05	3.03	3.02						
115	3.49	3.50	3.53	3.55	3.53	3.50	3.49	3.50	3.53	3.55	3.53	3.50						
120	3.98	4.01	4.04	4.07	4.04	4.01	3.98	4.01	4.04	4.07	4.04	4.01						
125	4.50	4.53	4.57	4.61	4.57	4.53	4.50	4.53	4.57	4.61	4.57	4.53						
130	5.04	5.06	5.12	5.16	5.12	5.06	5.04	5.06	5.12	5.16	5.12	5.06						
135	5.57	5.60	5.67	5.72	5.67	5.60	5.57	5.60	5.67	5.72	5.67	5.60						
140	6.09	6.12	6.21	6.24	6.21	6.12	6.09	6.12	6.21	6.24	6.21	6.12						
145	6.59	6.62	6.72	6.75	6.72	6.62	6.59	6.62	6.72	6.75	6.72	6.62						
150	7.08	7.10	7.20	7.23	7.20	7.10	7.08	7.10	7.20	7.23	7.20	7.10						
155	7.55	7.56	7.64	7.69	7.64	7.56	7.55	7.56	7.64	7.69	7.64	7.56						
160	8.04	8.01	8.06	8.11	8.06	8.01	8.04	8.01	8.06	8.11	8.06	8.01						
165	8.55	8.45	8.45	8.51	8.45	8.45	8.55	8.45	8.45	8.51	8.45	8.45						
170	8.97	8.84	8.79	8.83	8.79	8.84	8.97	8.84	8.79	8.83	8.79	8.84						
175	9.17	9.07	9.02	9.02	9.02	9.07	9.17	9.07	9.02	9.02	9.02	9.07						
180	9.18	9.10	9.07	9.09	9.07	9.10	9.18	9.10	9.07	9.09	9.07	9.10						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:16 September 2021

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:10.890m [K=1.0000]
 Remarks: