




# POWER-LITE®

Certainty at The Speed of Light

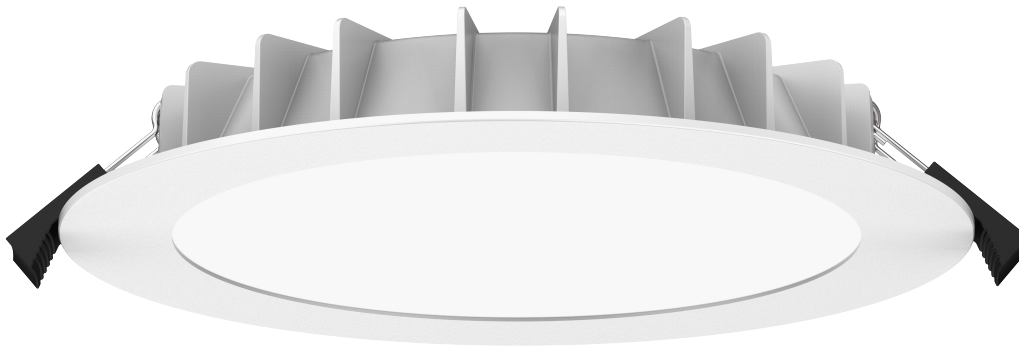

## LED CIRCULAR

**PANEL**

CP16W-CC, CP20W-CC

The POWER-LITE® Circular LED Light Panel are easy to install and will work with most trailing edge, LED or universal dimmers.



### APPLICATIONS

Domestic | Retail

Commercial

Office

Healthcare



☎ 1800 909 306

🌐 [nedlandsgroup.com.au](http://nedlandsgroup.com.au)

✉ [sales@nedlandsgroup.com.au](mailto:sales@nedlandsgroup.com.au)





# POWER-LITE®



Certainty at The Speed of Light

## DIMENSIONS (mm)

CP16W-CC  
Cutout 160-170



CP20W-CC  
Cutout 200-210



**LED Chip**  
Epistar 2835 SMD

**Life Expectancy**  
50,000 hrs TM-21

**Working Temp**  
-20°C to +65°C

**CRI**  
>80

**Power Factor**  
>0,90

**Efficacy**  
Up to 120lm/W

**LED Driver**  
Dimmable

**Connection**  
1.2M SAA Cable with SAA  
Australian plug with earth  
pin

3CCT

AC200-265V

White Frame  
Colour

| PRODUCT            | SPECIFICATIONS   | CODE            |
|--------------------|------------------|-----------------|
| LED CIRCULAR PANEL | 16W              | 3000K<br>1791lm |
|                    | Carton Qty<br>24 | 4000K<br>2028lm |
|                    |                  | 5700K<br>1903lm |
| LED CIRCULAR PANEL | 20W              | 3000K<br>2222lm |
|                    | Carton Qty<br>16 | 4000K<br>2527lm |
|                    |                  | 5700K<br>2378lm |

IP54

100°  
Beam Angle




# POWER-LITE®


Certainty at The Speed of Light

## PHOTOMETRICS


CPI6W | 3000K

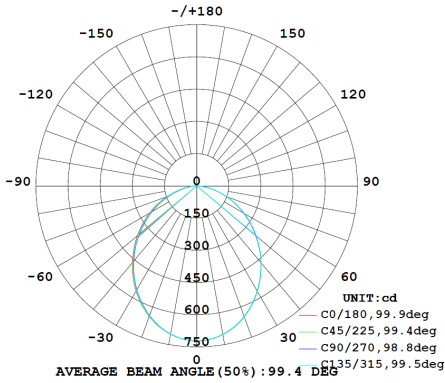


CP16W | 4000K

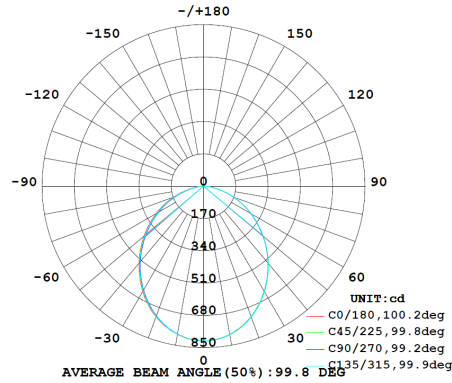


CPI6W | 5700K

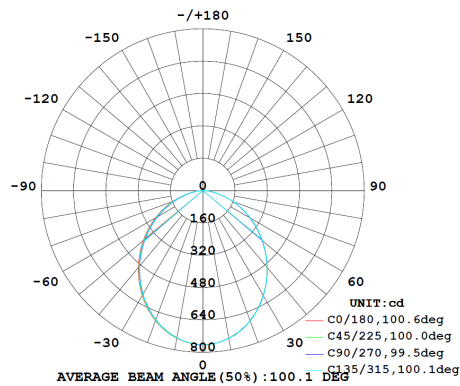

CP20W | 3000K

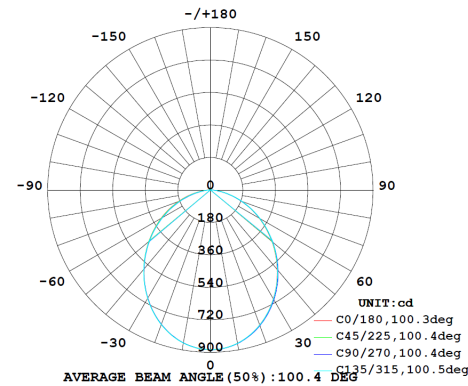

CP20W | 4000K

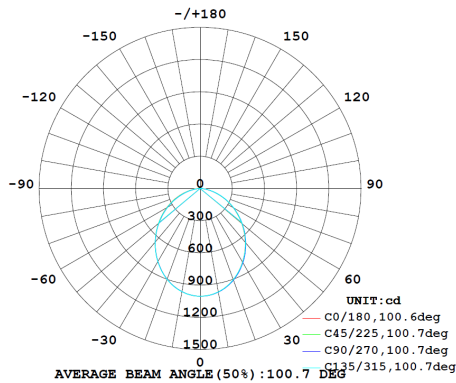

CP20W | 5700K

