



POWER-LITE®

Certainty at The Speed of Light



12W LED FIRE RATED

DOWNLIGHT

DL12W-FR-CC-IP65

The POWER-LITE® Fire Rated LED Downlight features a unique heat-sink design for extreme heat dissipation. These come with a built-in LED driver with IC-4 insulation rating for easy install. Features high light efficiency with 3 colour switchable temperature and 3 interchangeable magnetic trims included.



AS 1530.4

Fire Resistant
for 90 Mins

IC - 4



E2362

5

YEAR

WARRANTY



APPLICATIONS

Domestic | Retail

Commercial



☎ 1800 909 306

🌐 nedlandsgroup.com.au


✉ sales@nedlandsgroup.com.au



POWER-LITE®

Certainty at The Speed of Light

DIMENSIONS	(mm)
Cutout	90
Diameter	106
Height	31.5

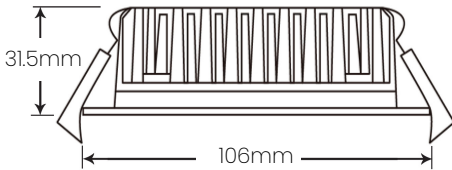

Notes

- Dimmable with most leading edge and trailing edge dimmers
- IC-F / IC-4 rated downlights can be covered and abutted with building materials which can be safely exposed to temperatures of up to 90°C.

LED Chip

Epistar 2835

Efficacy

Up to 100lm/W

Life Expectancy

50,000 hrs TM-21

LED Driver

Dimmable

SCDM

<6 Macadam steps

Integral

IC-4

Working Temp

-30°C to +40°C

Connection

1m Lead & Plug

CRI

>80

Housing Material

Aluminium

Carton Qty

30




12W



3 CCT



3000K
1021lm



4000K
1136lm



6000K
1061lm



AC200-240V

PRODUCT

12W LED FIRE RATED DOWNLIGHT

CODE

DL12W-FR-CC-IP65

ACCESSORIES

INCLUDED DOWNLIGHT TRIMS



Black

Brushed Chrome

White



IP65



60°
Beam Angle



1800 909 306

nedlandsgroup.com.au

sales@nedlandsgroup.com.au




POWER-LITE®


Certainty at The Speed of Light

PHOTOMETRICS

DLI2W-FR-CC-IP65 | 3000K

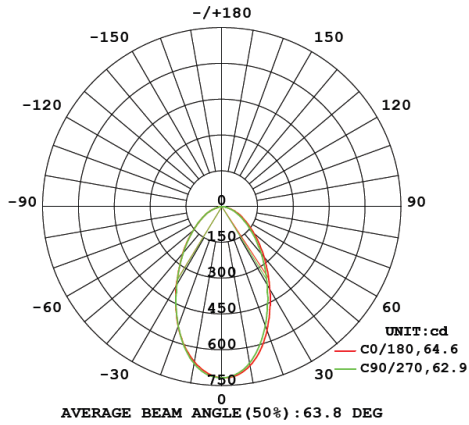

DLI2W-FR-CC-IP65 | 4000K

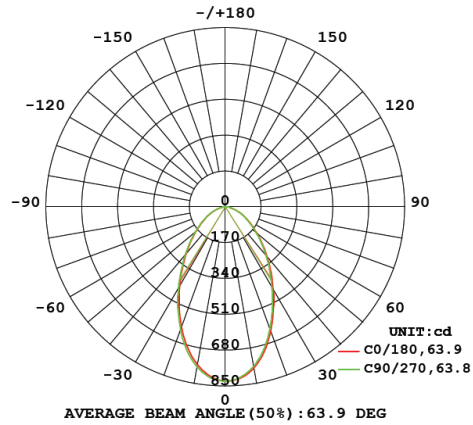

DLI2W-FR-CC-IP65 | 6000K

