



# POWER-LITE®

Certainty at The Speed of Light



Flush  
Lens



## 8W LED INTEGRAL DRIVER

**DOWNLIGHT**

ID8W-CC-F

The POWER-LITE® 8W LED Integral Downlight saves energy and costs as compared to standard halogen downlights. These come with a built-in LED driver with IC-4 insulation rating for easy install. This downlight includes the elimination of UV therefore insects will not be attracted to this light.

### APPLICATIONS

Domestic | Retail

Commercial



1800 909 306


[nedlandsgroup.com.au](http://nedlandsgroup.com.au)

[sales@nedlandsgroup.com.au](mailto:sales@nedlandsgroup.com.au)



# POWER-LITE®

Certainty at The Speed of Light

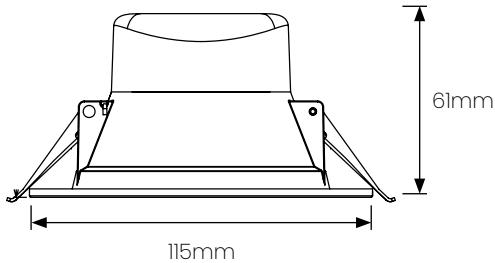

DIMENSIONS	(mm)
Cutout	90-95
Diameter	115
Height	61

### Notes

- Compatible with Clipsal C-Bus dimming systems
- IC-F / IC-4 rated downlights, can be covered and abutted with building materials which can be safely exposed to temperatures of up to 45°

### LED Chip

Epistar 2835

### Efficacy

Up to 104lm/W

### Life Expectancy

40,000 hrs TM-21

### LED Driver

Dimmable

Integral

IC-4

### Working Temp

-20°C to +45°C

### CRI

>80

### Connection

1.2m Lead & Plug

or Hard wired installation

option

### Carton Qty

30



8W



3 CCT



3000K  
785lm



4000K  
877lm



5700K  
793lm



AC200-240V  
50Hz



White Frame  
Colour

## PRODUCT

## CODE

8W LED INTEGRAL DRIVER DOWNLIGHT

ID8W-CC-F

## ACCESSORIES

## OPTIONS

## CODE

DOWNLIGHT RING



Black

ID-BLACK



Brushed  
Chrome Finish  
(304 Marine Grade  
Stainless Steel)

ID-BC

140MM RETROFIT RING




White

ID10W-RF-140



IP54



90°  
Beam Angle



1800 909 306

nedlandsgroup.com.au

sales@nedlandsgroup.com.au




# POWER-LITE®


Certainty at The Speed of Light

## PHOTOMETRICS

ID8W-CC-F | 3000K

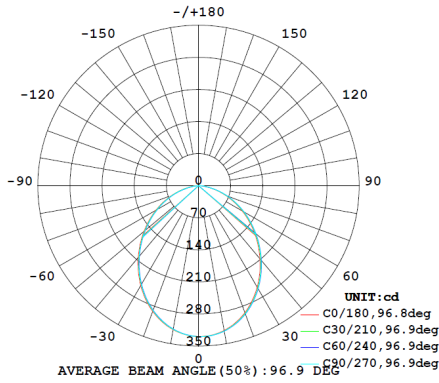

ID8W-CC-F | 4000K

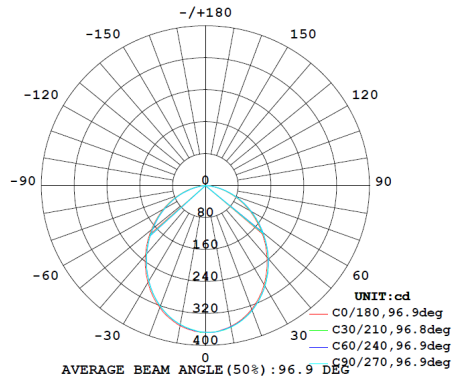

ID8W-CC-F | 5700K

