
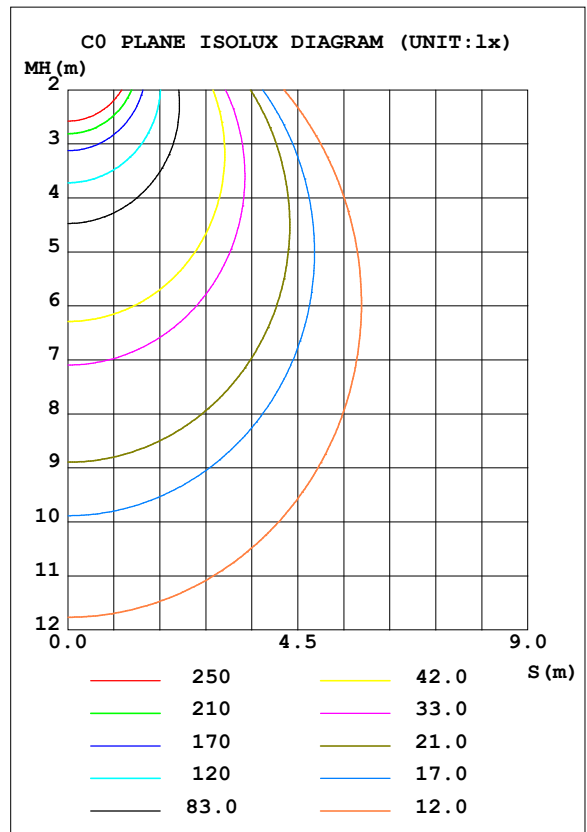


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.18V I:0.1731A P:40.392W PF:0.9714 Freq:50.00Hz Lamp Flux:4877.97x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 120.76 lm/W			
MODEL	BLP45W-120/60-CC	Imax (cd)	1662	S/MH (C0/180)	1.26
NOMINAL POWER (W)	45	LOR (%)	100.0	S/MH (C90/270)	1.28
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	4878.0	<input type="checkbox"/> UP, DN (C0-180)	0.0, 49.5
NOMINAL FLUX (lm)	4877.97	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 50.5
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	240	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.35

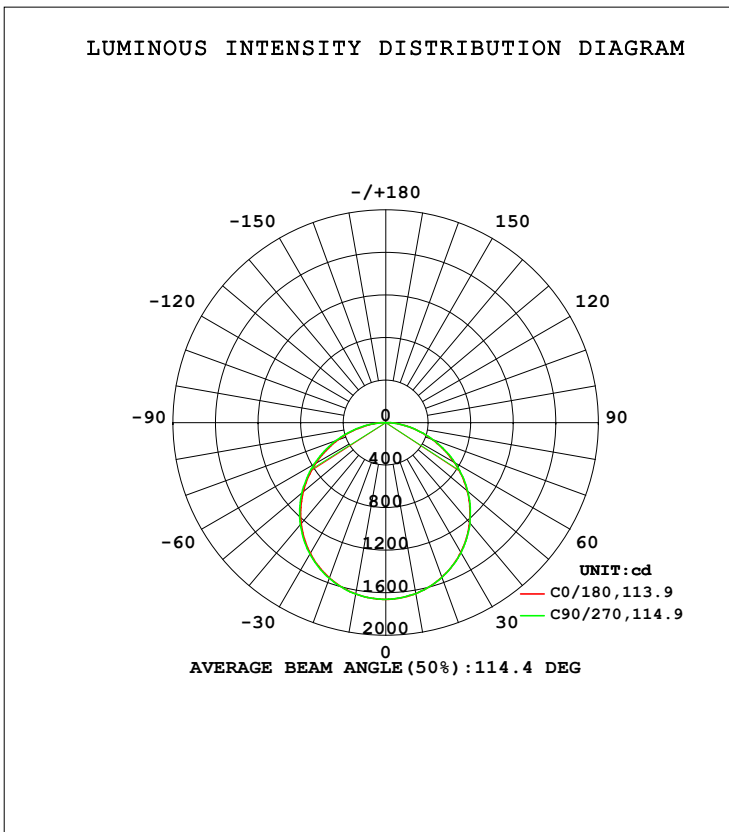

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity: 65.0%  
 Test Distance: 8.570m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1632	1631	1633	1630	1635	1635	1636	1636	0- 10	157.2	157.2	3.22,3.22
20	1547	1547	1548	1546	1554	1554	1556	1555	10- 20	451.3	608.5	12.5,12.5
30	1410	1412	1414	1410	1420	1423	1427	1425	20- 30	687.0	1295	26.6,26.6
40	1226	1230	1231	1226	1238	1243	1250	1246	30- 40	833.6	2129	43.6,43.6
50	1001	1005	1007	1001	1014	1022	1030	1023	40- 50	870.9	3000	61.5,61.5
60	741.8	748.0	749.6	743.0	757.1	765.0	774.6	767.9	50- 60	793.2	3793	77.8,77.8
70	467.7	473.5	475.6	466.6	480.3	489.6	500.6	492.6	60- 70	612.6	4406	90.3,90.3
80	205.3	207.9	208.9	200.3	212.9	220.8	231.7	225.6	70- 80	364.2	4770	97.8,97.8
90	3.631	4.235	2.321	2.251	4.861	5.936	6.417	7.117	80- 90	108.1	4878	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:240.18V I:0.1731A P:40.392W PF:0.9714 Freq:50.00Hz Lamp Flux:4877.97x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

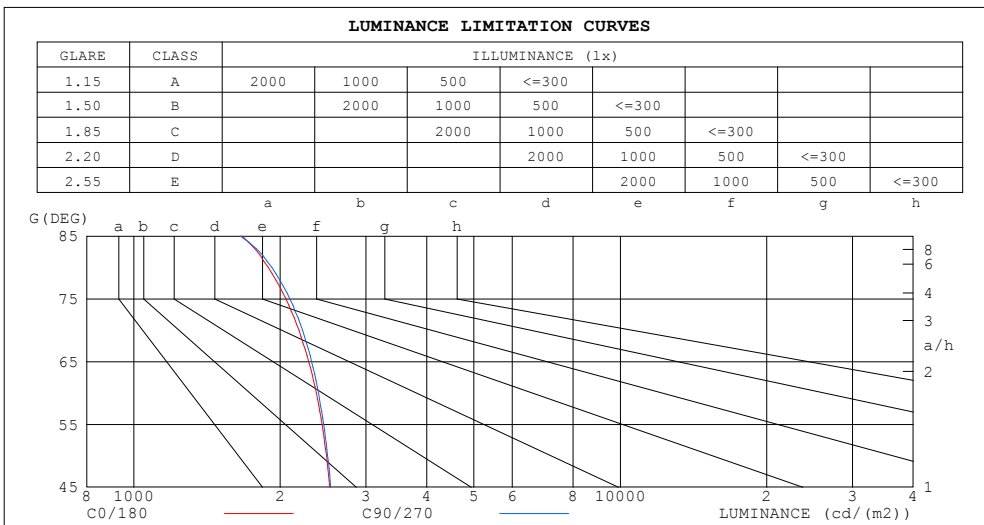

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1670	1655
80	1889	1923
75	2053	2093
70	2186	2222
65	2288	2319
60	2371	2396
55	2437	2457
50	2489	2503
45	2528	2540


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.18V I:0.1731A P:40.392W PF:0.9714 Freq:50.00Hz Lamp Flux:4877.97x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

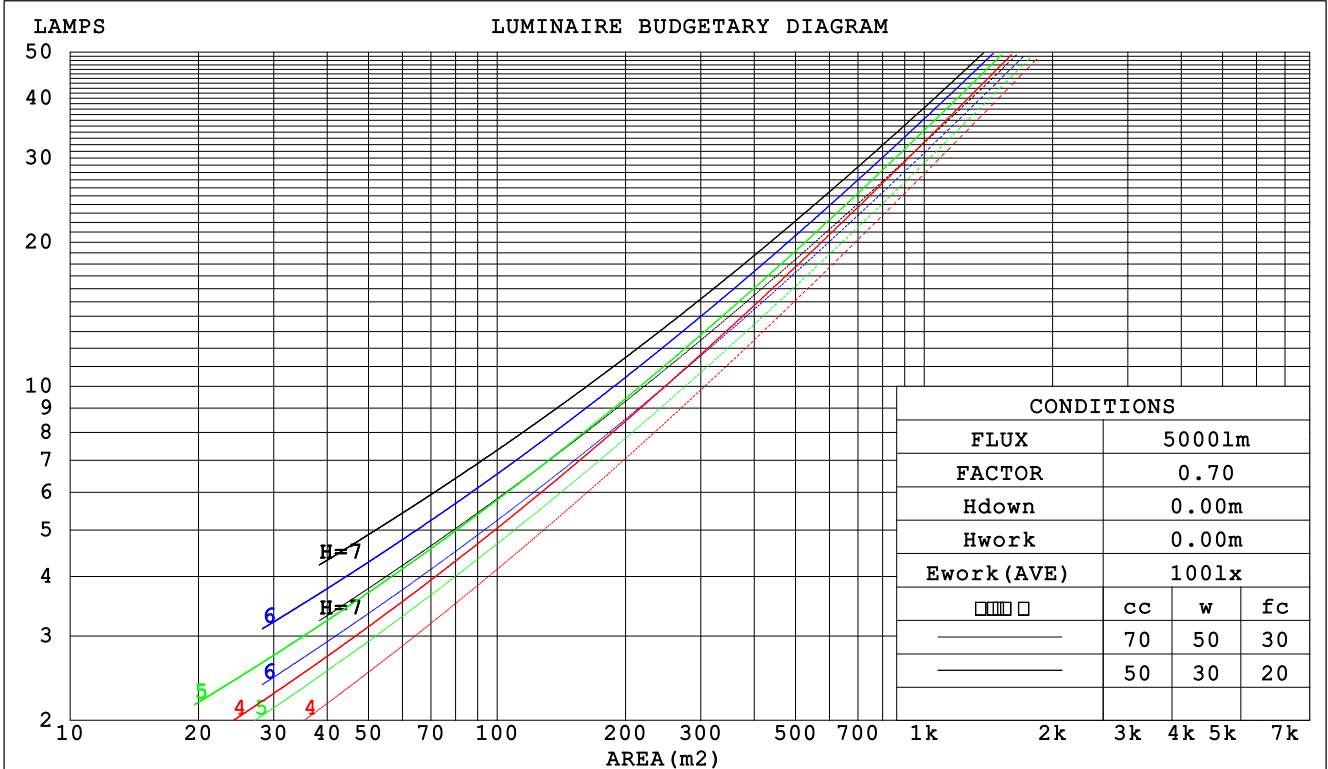

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:240.18V I:0.1731A P:40.392W PF:0.9714 Freq:50.00Hz Lamp Flux:4877.97x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.317	.180	.057	.309	.177	.056	.296	.170	.054	.284	.164	.053	.273	.158	.051	
2.0	.296	.162	.050	.290	.160	.049	.278	.155	.048	.268	.150	.047	.258	.146	.046	
3.0	.274	.146	.044	.268	.144	.043	.258	.140	.042	.248	.136	.042	.239	.132	.041	
4.0	.252	.131	.038	.247	.129	.038	.238	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.233	.118	.034	.228	.117	.034	.220	.115	.034	.212	.112	.033	.205	.110	.033	
6.0	.215	.108	.031	.212	.107	.031	.204	.105	.030	.197	.103	.030	.191	.101	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.179	.093	.027	
8.0	.187	.091	.026	.184	.091	.026	.178	.089	.025	.173	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.083	.023	.162	.081	.023	.158	.080	.023	
10.0	.165	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.149	.075	.021	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.156	.134	.155	.134	.115	.106	.092	.080	.061	.053	.046	.020	.017	.015	
2.0	.173	.132	.097	.148	.114	.084	.101	.079	.059	.059	.046	.034	.019	.015	.011	
3.0	.165	.114	.074	.142	.099	.064	.097	.069	.045	.056	.040	.026	.018	.013	.009	
4.0	.158	.101	.058	.135	.087	.050	.093	.061	.035	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.051	.032	.017	.017	.010	.006	
6.0	.143	.082	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.015	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.074	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.118	.060	.022	.101	.052	.019	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:240.18V I:0.1731A P:40.392W PF:0.9714 Freq:50.00Hz Lamp Flux:4877.97x1 lm										
NAME: BLP45W-120/60-CC					TYPE:45W			WEIGHT:		
SPEC.:4000K					DIM.:			SERIAL No.:1		
MFR.:					SUR.:1.142*0.546			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.0	17.5	16.2	17.7	17.9	16.0	17.5	16.3	17.7	18.0
3H	17.5	18.9	17.8	19.2	19.4	17.6	19.0	17.9	19.2	19.5
4H	18.1	19.5	18.4	19.7	20.0	18.2	19.6	18.5	19.8	20.1
6H	18.6	19.9	18.9	20.1	20.4	18.7	20.0	19.0	20.2	20.5
8H	18.8	20.0	19.1	20.3	20.6	18.8	20.1	19.2	20.4	20.6
12H	18.8	20.0	19.2	20.3	20.6	18.9	20.1	19.3	20.4	20.7
4H 2H	16.6	17.9	16.9	18.2	18.5	16.6	18.0	16.9	18.2	18.5
3H	18.3	19.5	18.7	19.8	20.1	18.4	19.6	18.7	19.9	20.2
4H	19.1	20.2	19.5	20.5	20.8	19.1	20.2	19.5	20.6	20.9
6H	19.7	20.6	20.1	21.0	21.4	19.8	20.7	20.2	21.1	21.4
8H	19.9	20.8	20.3	21.2	21.5	20.0	20.9	20.4	21.2	21.6
12H	20.0	20.9	20.5	21.2	21.7	20.1	20.9	20.5	21.3	21.7
8H 4H	19.4	20.3	19.8	20.6	21.0	19.4	20.3	19.8	20.7	21.1
6H	20.1	20.9	20.6	21.3	21.7	20.2	20.9	20.6	21.4	21.8
8H	20.4	21.1	20.9	21.5	22.0	20.5	21.2	21.0	21.6	22.0
12H	20.7	21.2	21.1	21.7	22.2	20.7	21.3	21.2	21.7	22.2
12H 4H	19.4	20.2	19.8	20.6	21.0	19.4	20.3	19.9	20.7	21.1
6H	20.2	20.9	20.7	21.3	21.7	20.3	20.9	20.7	21.4	21.8
8H	20.5	21.1	21.0	21.6	22.0	20.6	21.2	21.1	21.6	22.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 4878 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.5)

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:240.18V I:0.1731A P:40.392W PF:0.9714 Freq:50.00Hz Lamp Flux:4877.97x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	56	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	77	70	86	77	70	83	75	69	61
2.00	94	86	79	93	85	78	89	82	77	69
2.50	98	91	84	96	89	83	93	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	104	98	94	99	95	91	82
5.00	108	103	99	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:240.18V I:0.1731A P:40.392W PF:0.9714 Freq:50.00Hz Lamp Flux:4877.97x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

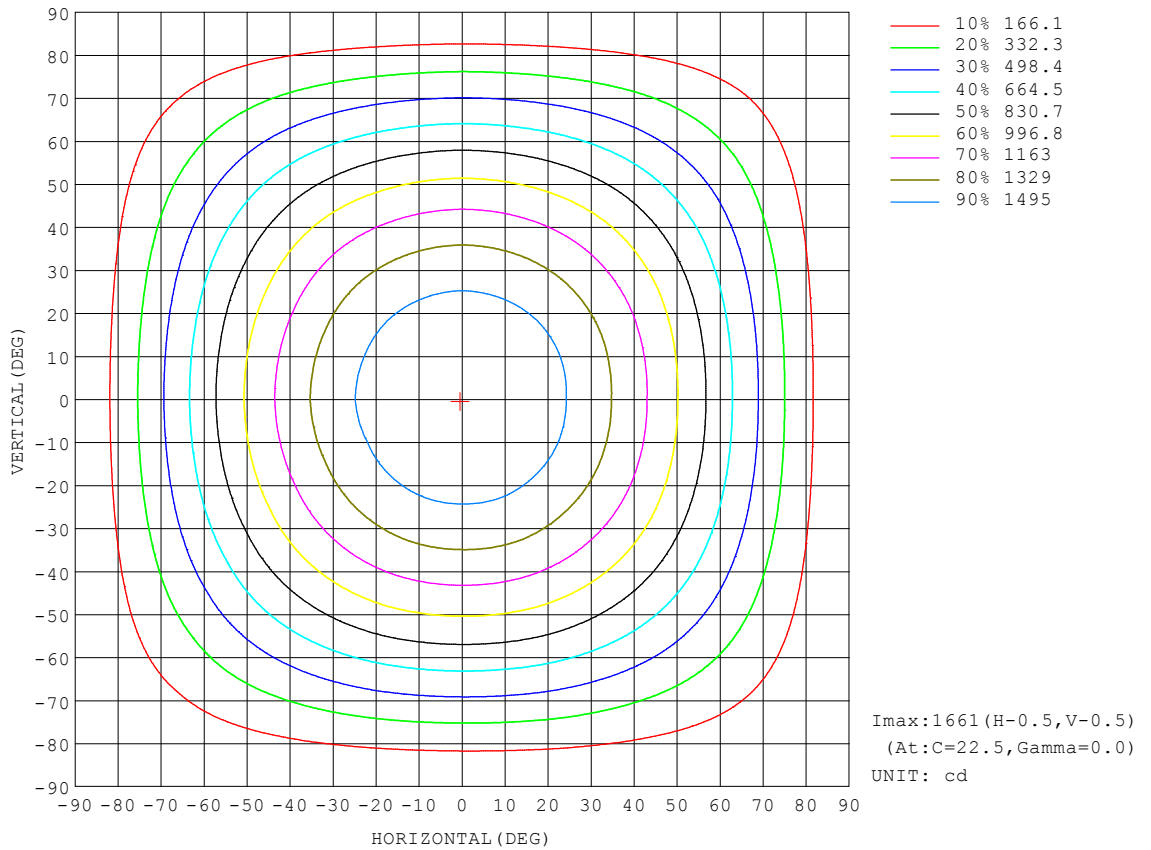


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:240.18V I:0.1731A P:40.392W PF:0.9714 Freq:50.00Hz Lamp Flux:4877.97x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

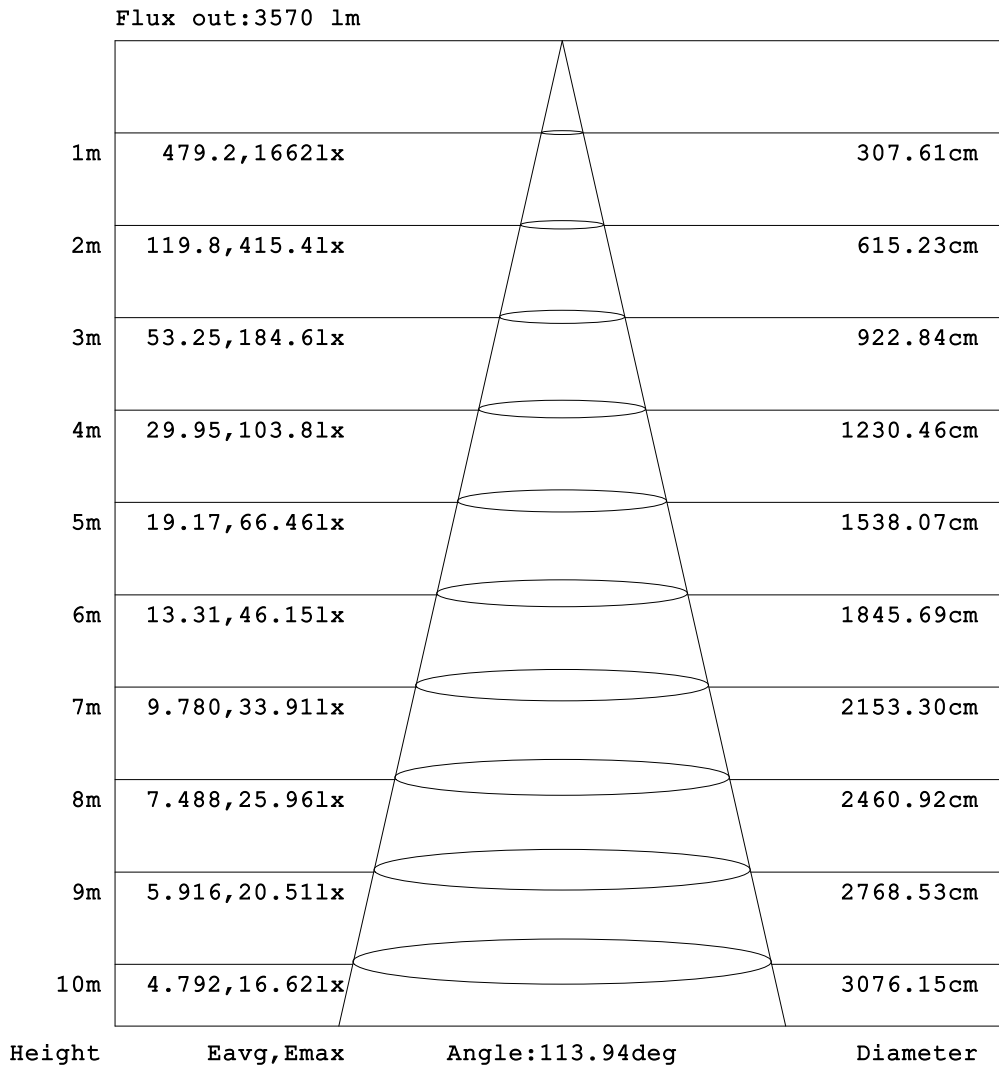


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:240.18V I:0.1731A P:40.392W PF:0.9714 Freq:50.00Hz Lamp Flux:4877.97x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

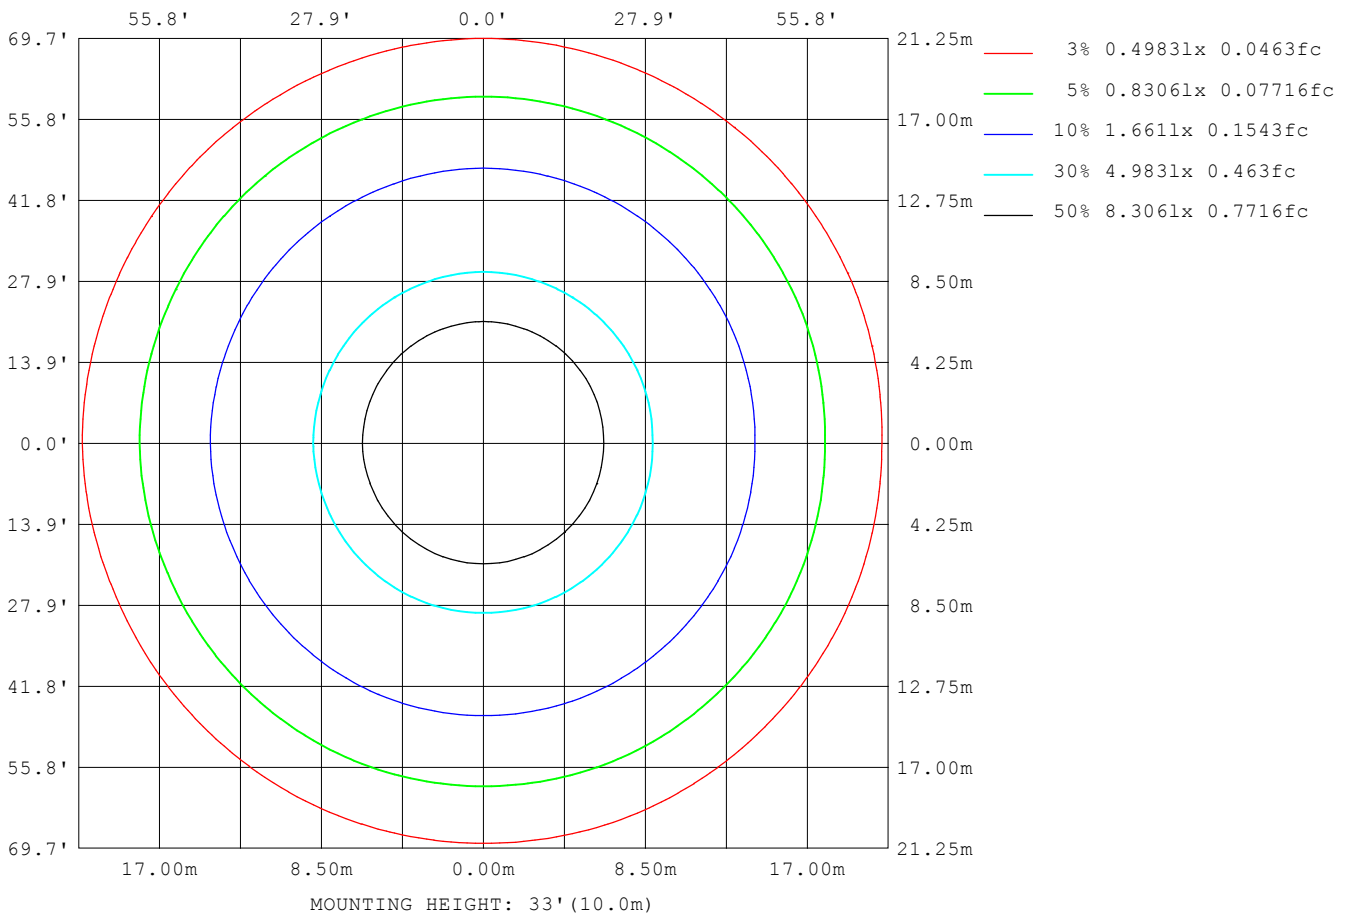

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:240.18V I:0.1731A P:40.392W PF:0.9714 Freq:50.00Hz Lamp Flux:4877.97x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2316
L_0~180 (75) av	2088
L_0~180 (85) av	1706
L_90~270 (65) av	2368
L_90~270 (75) av	2169
L_90~270 (85) av	1830
L_45 (65) av	2341
L_45 (75) av	2124
L_45 (85) av	1739

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

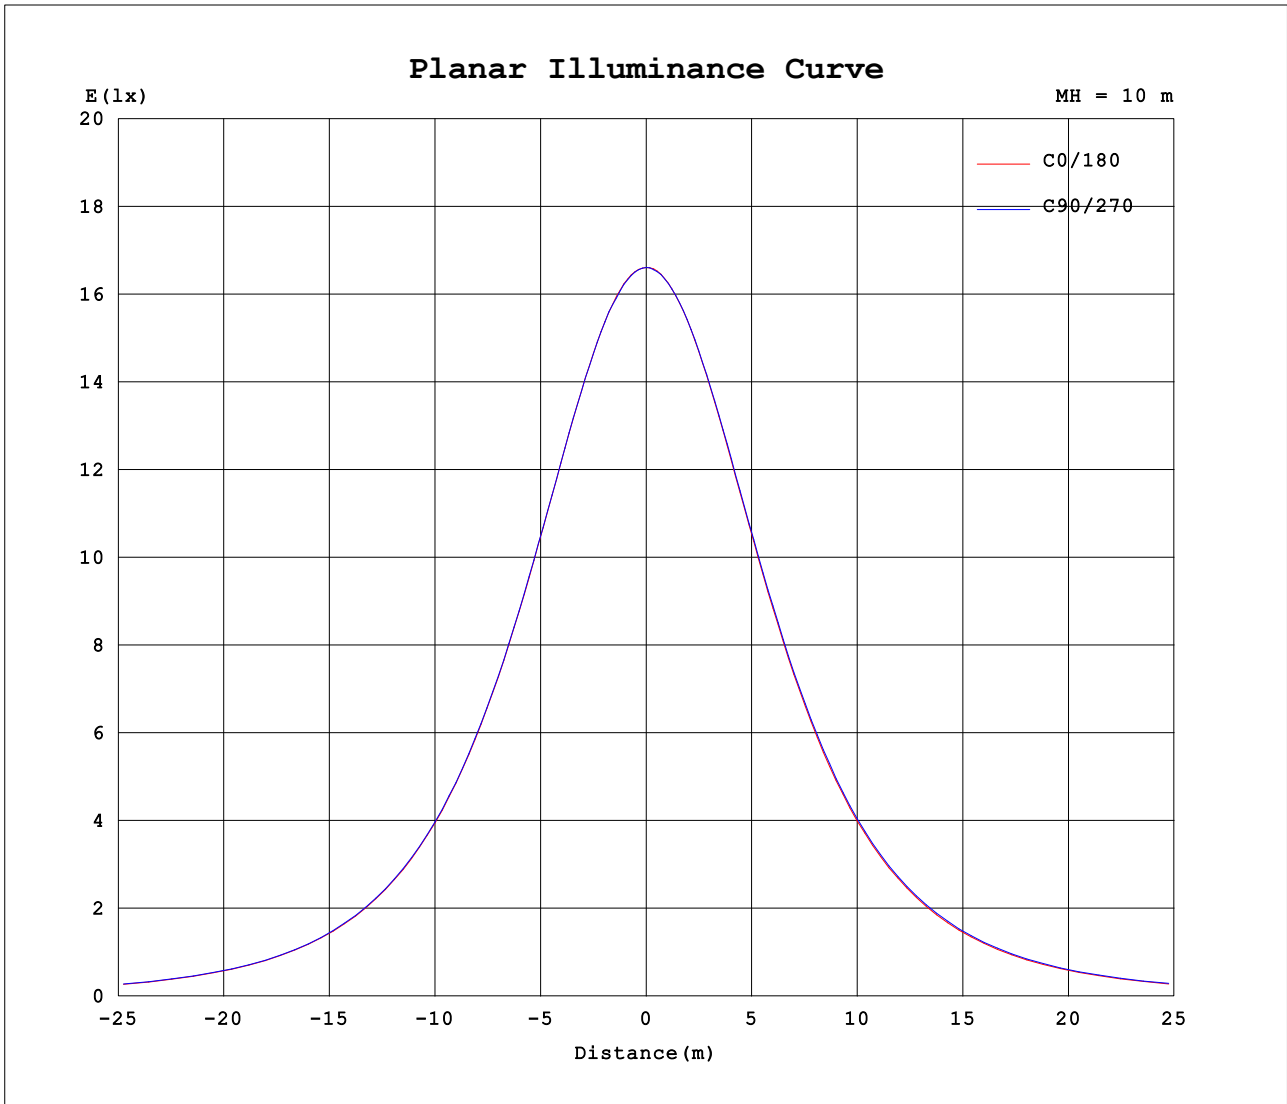

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity: 65.0%  
 Test Distance: 8.570m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.18V I:0.1731A P:40.392W PF:0.9714 Freq:50.00Hz Lamp Flux:4877.97x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

Table--1

UNIT: cd

$\phi$ (DEG) \ C (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1661	1662	1661	1661	1661	1660	1662	1660	1661	1662	1661	1661	1661	1660	1662	1660			
5	1654	1653	1653	1651	1652	1653	1652	1652	1655	1654	1655	1654	1655	1654	1655	1654			
10	1632	1632	1631	1632	1633	1631	1630	1630	1635	1634	1635	1635	1636	1634	1636	1633			
15	1596	1597	1596	1596	1595	1596	1595	1595	1601	1599	1602	1601	1603	1603	1602	1600			
20	1547	1548	1547	1549	1548	1548	1546	1546	1554	1553	1554	1555	1556	1556	1555	1553			
25	1485	1487	1486	1488	1486	1486	1484	1483	1493	1492	1495	1496	1498	1496	1496	1493			
30	1410	1413	1412	1416	1414	1413	1410	1408	1420	1419	1423	1424	1427	1426	1425	1420			
35	1324	1327	1327	1332	1328	1327	1324	1322	1335	1333	1339	1341	1345	1342	1340	1335			
40	1226	1230	1230	1234	1231	1231	1226	1225	1238	1237	1243	1246	1250	1248	1246	1239			
45	1118	1123	1123	1127	1124	1123	1119	1117	1131	1131	1138	1140	1145	1142	1140	1133			
50	1001	1005	1005	1010	1007	1006	1001	999	1014	1014	1022	1024	1030	1026	1023	1016			
55	875	880	880	885	882	881	875	873	889	889	897	900	906	903	899	892			
60	742	747	748	754	750	749	743	741	757	757	765	769	775	772	768	761			
65	605	610	611	617	613	612	605	603	620	620	628	633	639	636	631	624			
70	468	472	473	478	476	473	467	465	480	481	490	495	501	498	493	486			
75	333	337	337	343	339	337	330	328	344	344	352	357	363	360	357	350			
80	205	208	208	212	209	206	200	198	213	213	221	225	232	229	226	221			
85	91.1	91.3	90.7	91.9	90.2	86.5	83.4	81.5	95.0	95.4	100	104	109	108	105	104			
90	3.63	4.44	4.24	3.05	2.32	1.99	2.25	2.42	4.86	5.48	5.94	6.29	6.42	7.26	7.12	7.95			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks: