
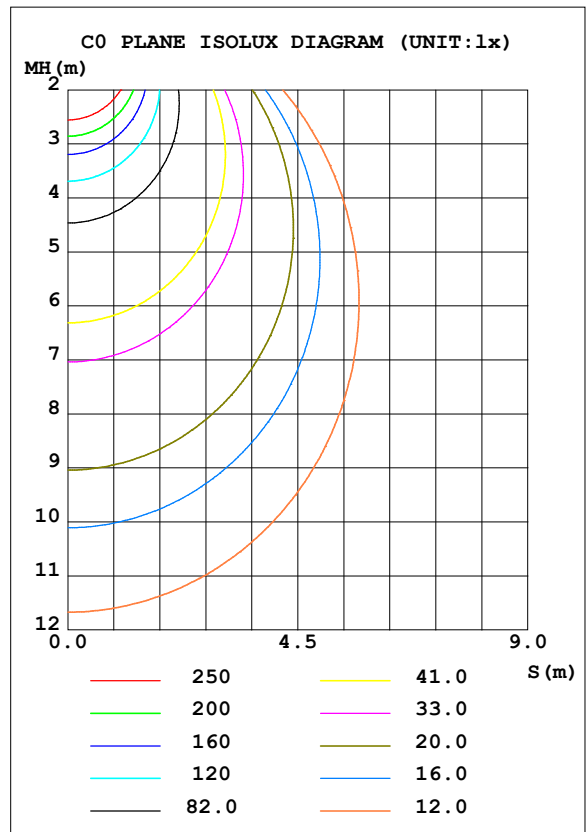


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.19V I:0.1791A P:41.866W PF:0.9731 Freq:50.00Hz Lamp Flux:4795.15x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 114.54 lm/W			
MODEL	BLP45W-120/60-CC	Imax (cd)	1635	S/MH (C0/180)	1.26
NOMINAL POWER (W)	45	LOR (%)	100.0	S/MH (C90/270)	1.28
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	4795.2	<input type="checkbox"/> UP, DN (C0-180)	0.0, 49.5
NOMINAL FLUX (lm)	4795.15	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 50.5
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	240	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.35

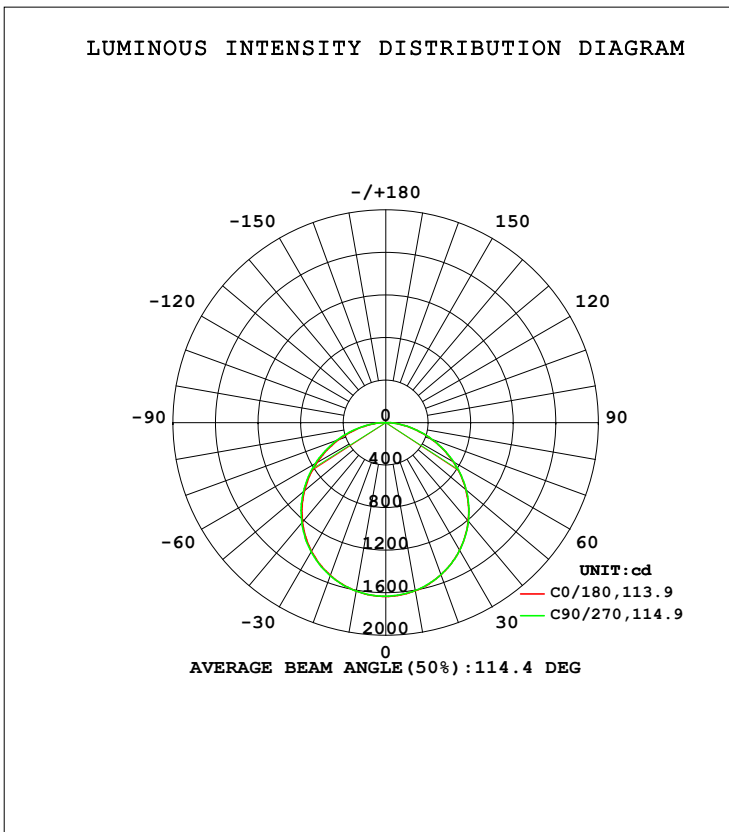

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity: 65.0%  
 Test Distance: 8.570m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:


°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1606	1604	1603	1602	1609	1608	1608	1606	0- 10	154.5	154.5	3.22,3.22
20	1522	1522	1521	1518	1528	1529	1531	1528	10- 20	443.6	598.2	12.5,12.5
30	1388	1389	1389	1385	1397	1399	1404	1399	20- 30	675.3	1274	26.6,26.6
40	1206	1209	1210	1205	1218	1223	1229	1223	30- 40	819.4	2093	43.6,43.6
50	983.9	988.6	989.3	983.6	997.9	1005	1013	1006	40- 50	856.1	2949	61.5,61.5
60	729.8	735.7	736.9	729.5	744.8	752.4	762.1	754.1	50- 60	779.7	3729	77.8,77.8
70	460.0	465.2	467.1	458.4	473.0	481.0	492.3	484.0	60- 70	602.1	4331	90.3,90.3
80	201.9	204.2	205.2	196.5	209.4	217.2	228.0	222.0	70- 80	358.0	4689	97.8,97.8
90	3.556	4.128	2.230	2.182	4.845	5.904	6.304	7.051	80- 90	106.2	4795	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:240.19V I:0.1791A P:41.866W PF:0.9731 Freq:50.00Hz Lamp Flux:4795.15x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

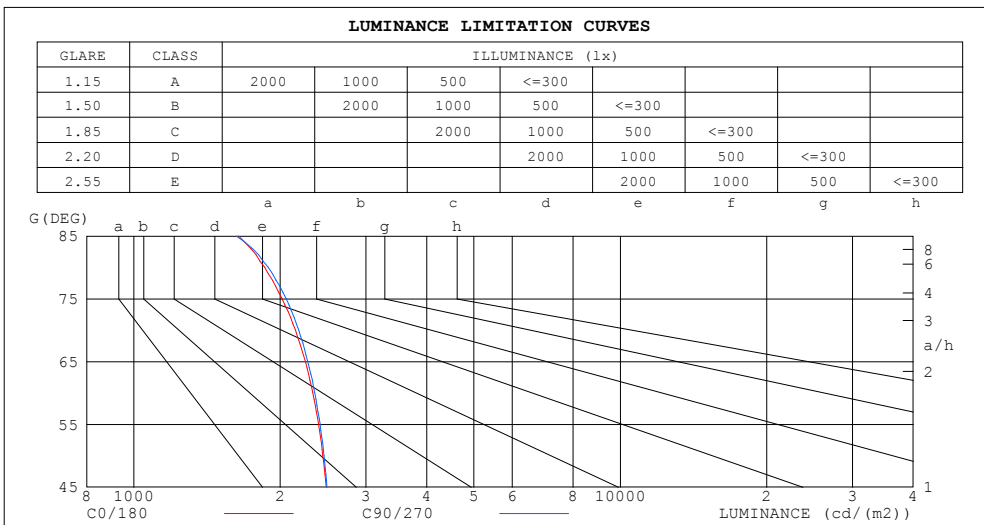


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.19V I:0.1791A P:41.866W PF:0.9731 Freq:50.00Hz Lamp Flux:4795.15x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

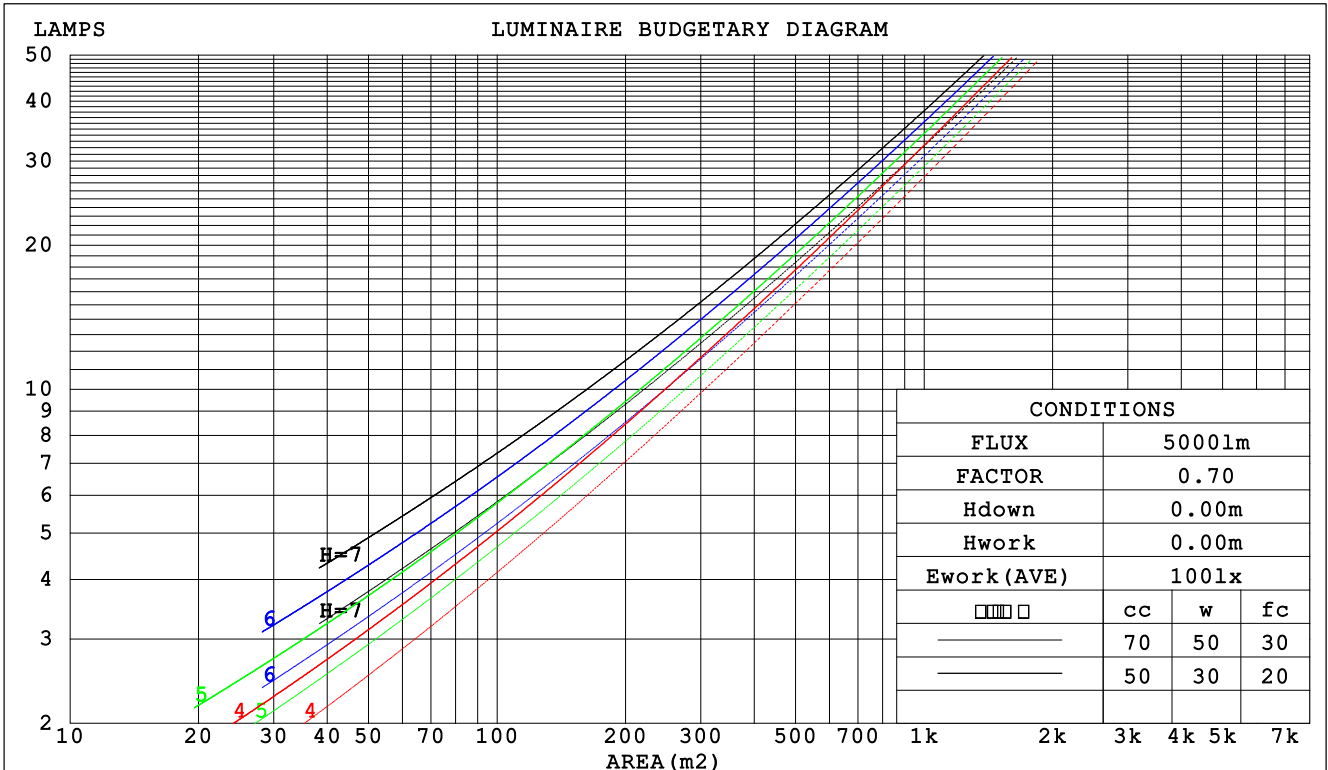

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:240.19V I:0.1791A P:41.866W PF:0.9731 Freq:50.00Hz Lamp Flux:4795.15x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.317	.180	.057	.309	.177	.056	.296	.170	.054	.284	.164	.053	.273	.158	.051	
2.0	.296	.162	.050	.290	.160	.049	.278	.155	.048	.268	.150	.047	.258	.146	.046	
3.0	.274	.146	.044	.268	.144	.043	.258	.140	.042	.248	.136	.042	.239	.132	.041	
4.0	.252	.131	.038	.247	.129	.038	.238	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.233	.118	.034	.228	.117	.034	.220	.115	.034	.212	.112	.033	.205	.110	.033	
6.0	.215	.108	.031	.212	.107	.031	.204	.105	.030	.197	.103	.030	.191	.101	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.179	.093	.027	
8.0	.187	.091	.026	.184	.091	.026	.178	.089	.025	.173	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.083	.023	.162	.081	.023	.158	.080	.023	
10.0	.165	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.149	.075	.021	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.156	.134	.155	.134	.115	.106	.092	.080	.061	.053	.046	.020	.017	.015	
2.0	.173	.132	.097	.148	.114	.084	.101	.079	.059	.059	.046	.034	.019	.015	.011	
3.0	.165	.114	.074	.142	.099	.064	.097	.069	.045	.056	.040	.026	.018	.013	.009	
4.0	.158	.101	.058	.135	.087	.050	.093	.061	.035	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.051	.032	.017	.017	.010	.006	
6.0	.143	.082	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.015	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.074	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.118	.060	.022	.101	.052	.019	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:240.19V I:0.1791A P:41.866W PF:0.9731 Freq:50.00Hz Lamp Flux:4795.15x1 lm										
NAME: BLP45W-120/60-CC					TYPE:45W			WEIGHT:		
SPEC.:5700K					DIM.:			SERIAL No.:1		
MFR.:					SUR.:1.142*0.546			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.9	17.4	16.2	17.6	17.9	15.9	17.5	16.2	17.7	17.9
3H	17.4	18.9	17.7	19.1	19.3	17.5	18.9	17.8	19.2	19.4
4H	18.1	19.4	18.4	19.7	19.9	18.1	19.5	18.5	19.8	20.0
6H	18.5	19.8	18.9	20.1	20.4	18.6	19.9	19.0	20.2	20.4
8H	18.7	19.9	19.0	20.2	20.5	18.8	20.0	19.1	20.3	20.6
12H	18.8	20.0	19.1	20.3	20.6	18.9	20.1	19.2	20.4	20.7
4H 2H	16.5	17.9	16.8	18.1	18.4	16.6	17.9	16.9	18.2	18.4
3H	18.3	19.4	18.6	19.7	20.1	18.3	19.5	18.7	19.8	20.1
4H	19.0	20.1	19.4	20.4	20.8	19.1	20.2	19.5	20.5	20.8
6H	19.6	20.6	20.0	20.9	21.3	19.7	20.7	20.1	21.0	21.4
8H	19.8	20.7	20.2	21.1	21.5	19.9	20.8	20.3	21.2	21.6
12H	20.0	20.8	20.4	21.2	21.6	20.0	20.9	20.5	21.3	21.7
8H 4H	19.3	20.2	19.7	20.6	21.0	19.4	20.3	19.8	20.6	21.0
6H	20.1	20.8	20.5	21.2	21.6	20.1	20.9	20.6	21.3	21.7
8H	20.4	21.0	20.8	21.5	21.9	20.4	21.1	20.9	21.5	22.0
12H	20.6	21.2	21.1	21.6	22.1	20.7	21.2	21.1	21.7	22.2
12H 4H	19.3	20.2	19.8	20.5	20.9	19.4	20.2	19.8	20.6	21.0
6H	20.1	20.8	20.6	21.2	21.7	20.2	20.9	20.7	21.3	21.7
8H	20.5	21.1	21.0	21.5	22.0	20.5	21.1	21.0	21.6	22.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 4795 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.4)

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:240.19V I:0.1791A P:41.866W PF:0.9731 Freq:50.00Hz Lamp Flux:4795.15x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	56	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	77	70	86	77	70	83	75	69	61
2.00	94	86	79	93	85	78	89	82	77	69
2.50	98	91	84	96	89	83	93	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	104	98	94	99	95	91	82
5.00	108	103	99	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:240.19V I:0.1791A P:41.866W PF:0.9731 Freq:50.00Hz Lamp Flux:4795.15x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

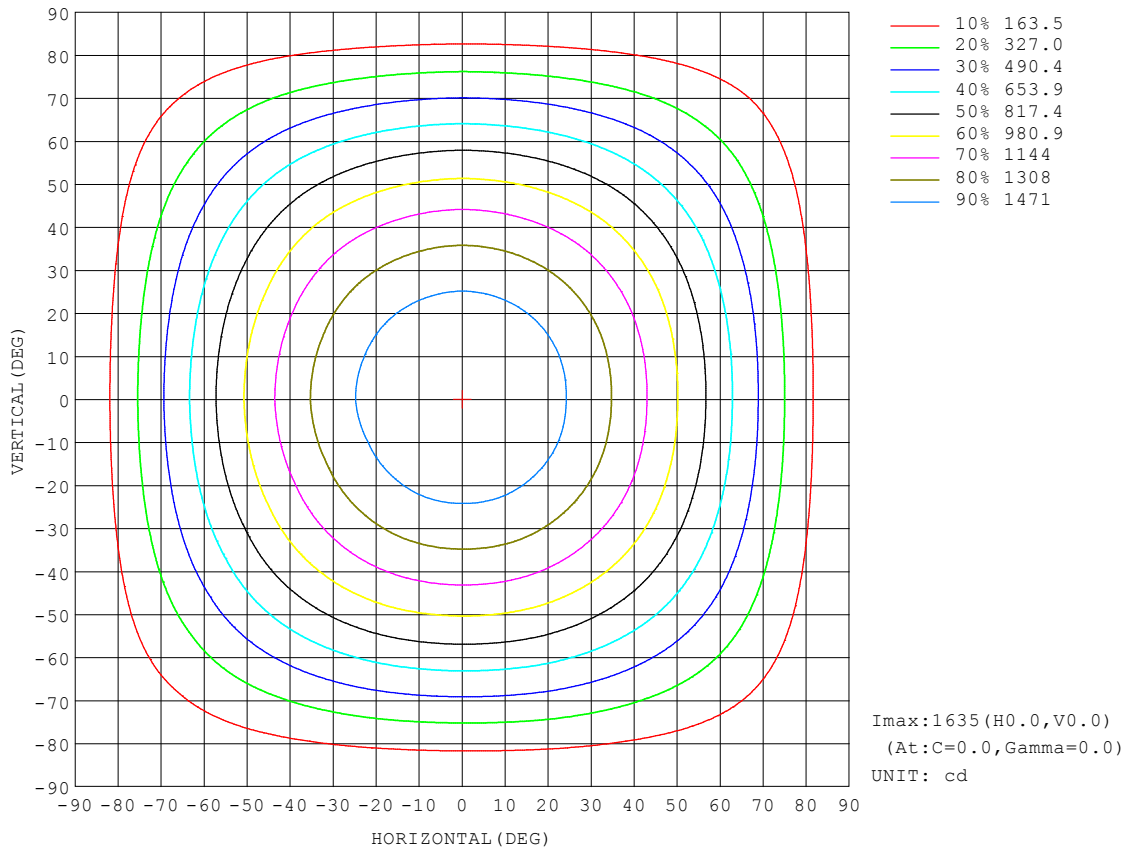


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:240.19V I:0.1791A P:41.866W PF:0.9731 Freq:50.00Hz Lamp Flux:4795.15x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

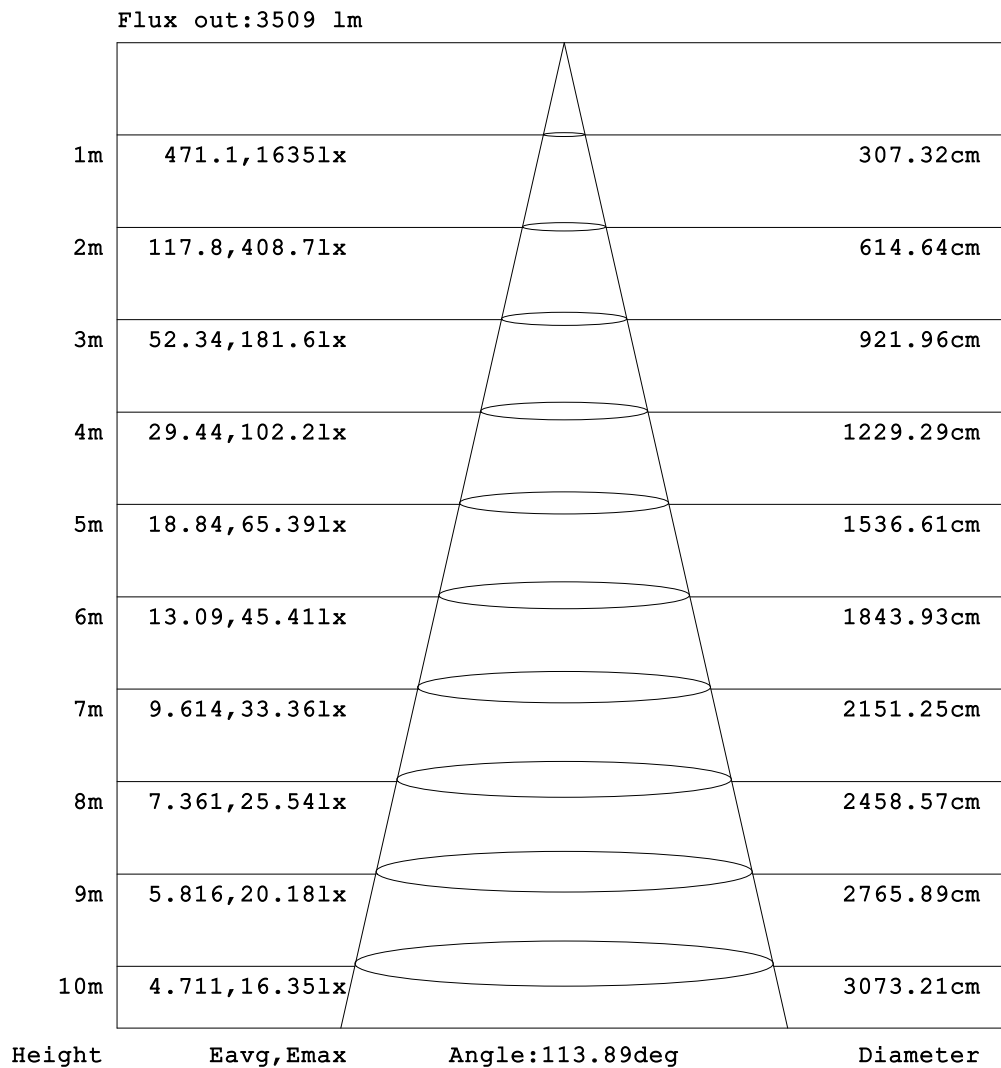


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:240.19V I:0.1791A P:41.866W PF:0.9731 Freq:50.00Hz Lamp Flux:4795.15x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

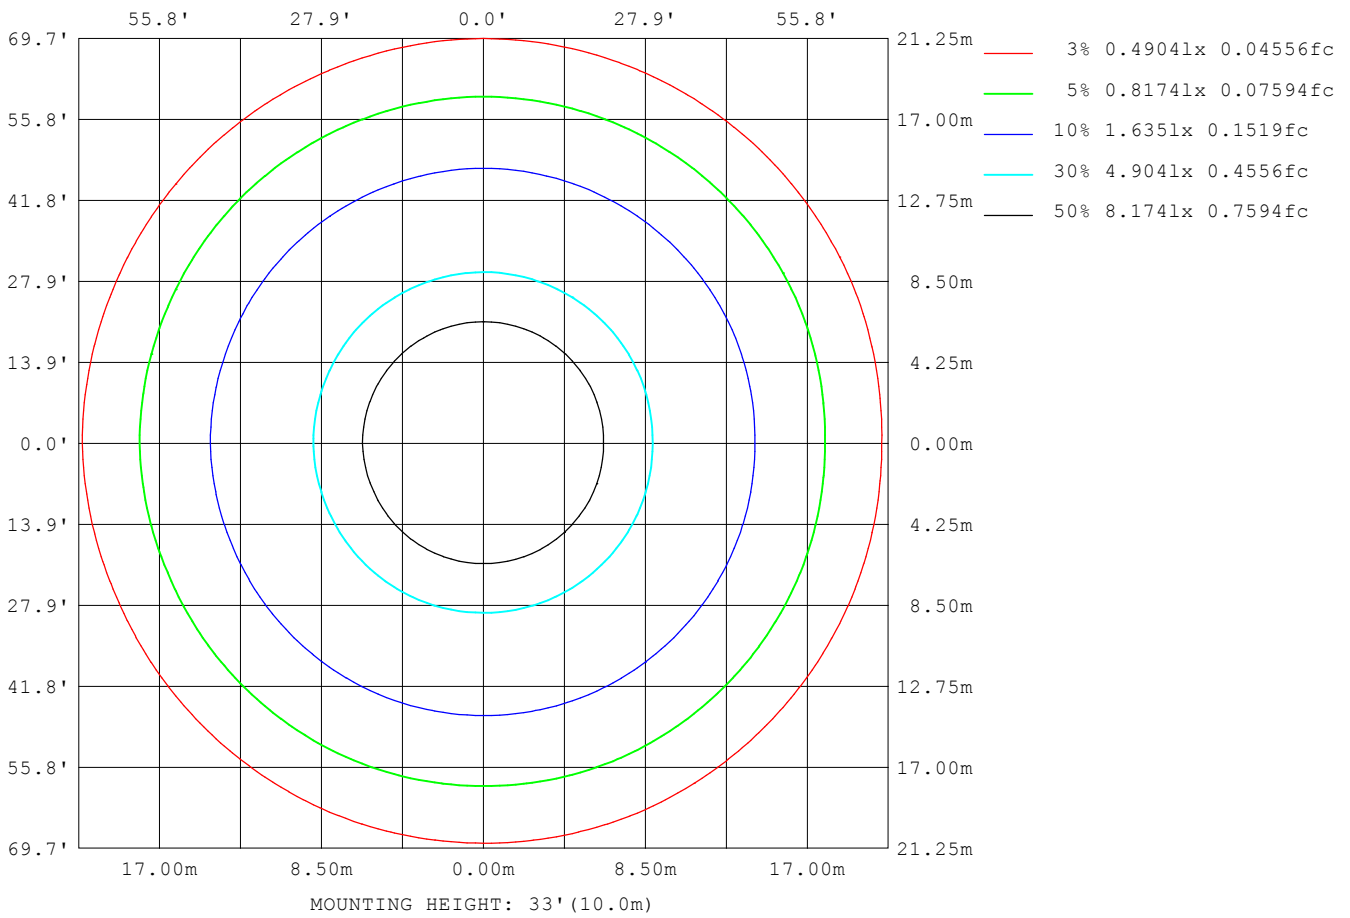

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:240.19V I:0.1791A P:41.866W PF:0.9731 Freq:50.00Hz Lamp Flux:4795.15x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2279
L_0~180 (75) av	2054
L_0~180 (85) av	1679
L_90~270 (65) av	2327
L_90~270 (75) av	2133
L_90~270 (85) av	1799
L_45 (65) av	2301
L_45 (75) av	2088
L_45 (85) av	1710

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

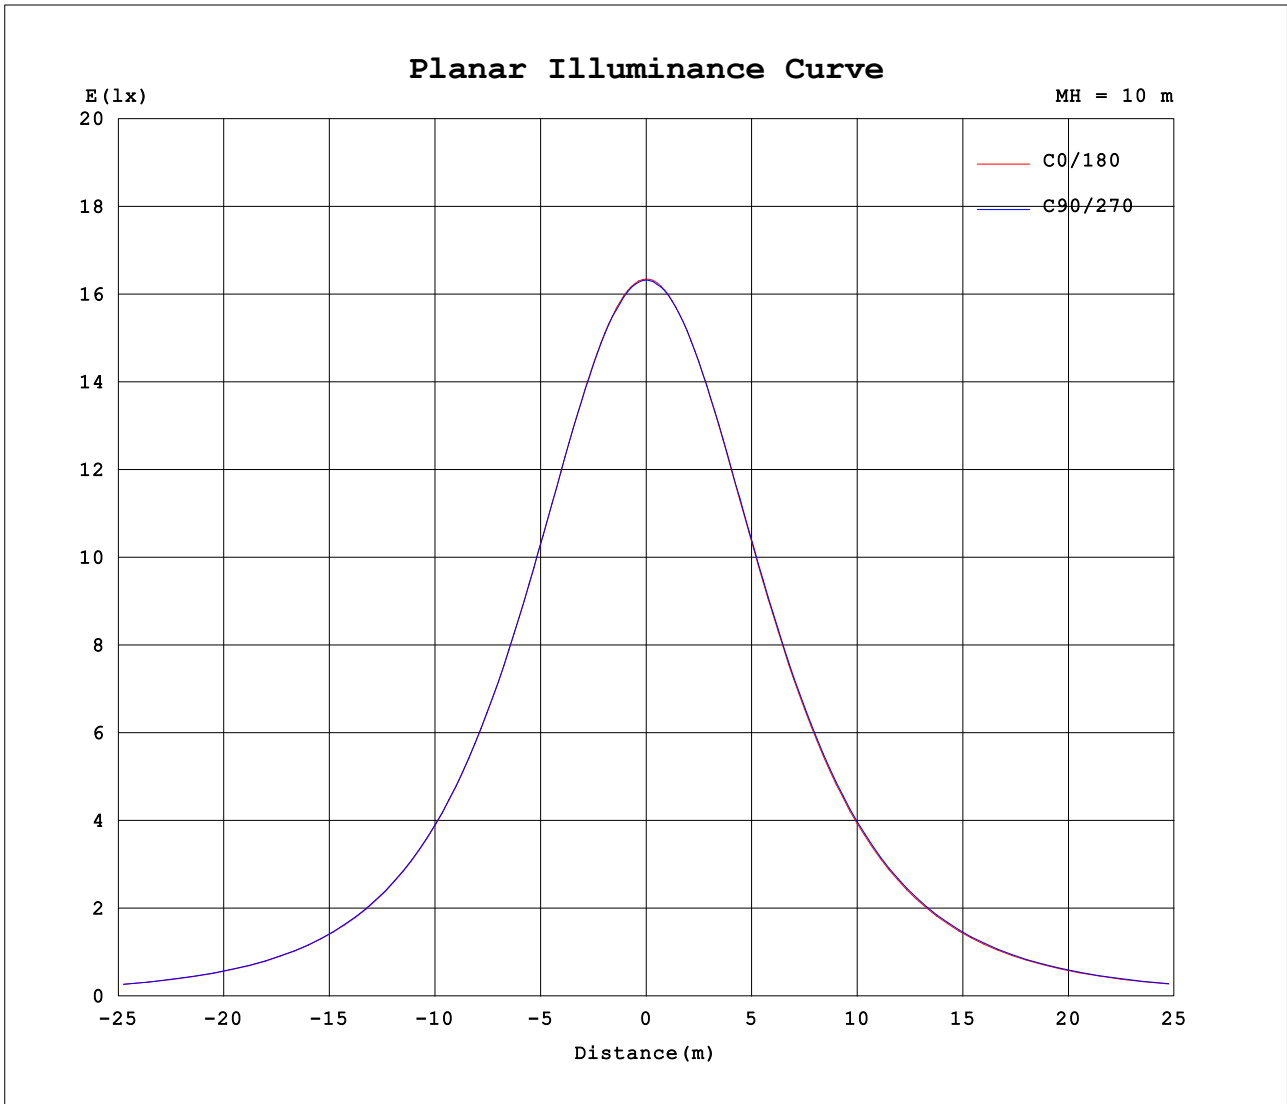

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity: 65.0%  
 Test Distance: 8.570m [K=1.0000]  
 Remarks:

**LUMINOUS DISTRIBUTION INTENSITY DATA**

Test:U:240.19V I:0.1791A P:41.866W PF:0.9731 Freq:50.00Hz Lamp Flux:4795.15x1 lm		
NAME: BLP45W-120/60-CC	TYPE:45W	WEIGHT:
SPEC.:5700K	DIM.:	SERIAL No.:1
MFR.:	SUR.:1.142*0.546	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1635	1634	1633	1632	1632	1632	1631	1631	1635	1634	1633	1632	1632	1632	1631	1631			
5	1627	1626	1625	1625	1624	1624	1623	1623	1629	1628	1627	1626	1627	1626	1626	1625			
10	1606	1604	1604	1604	1603	1603	1602	1601	1609	1607	1608	1607	1608	1607	1606	1605			
15	1570	1571	1569	1570	1568	1568	1566	1566	1575	1574	1575	1575	1576	1575	1573	1572			
20	1522	1522	1522	1523	1521	1521	1518	1518	1528	1527	1529	1529	1531	1530	1528	1526			
25	1461	1462	1461	1463	1461	1460	1457	1457	1469	1468	1470	1471	1473	1471	1470	1467			
30	1388	1390	1389	1392	1389	1389	1385	1384	1397	1395	1399	1400	1404	1402	1399	1395			
35	1302	1305	1305	1307	1305	1304	1300	1299	1313	1312	1317	1318	1322	1319	1316	1312			
40	1206	1210	1209	1212	1210	1209	1205	1203	1218	1217	1223	1225	1229	1227	1223	1218			
45	1100	1104	1104	1107	1104	1103	1099	1097	1113	1112	1119	1120	1126	1122	1119	1113			
50	984	989	989	992	989	989	984	981	998	997	1005	1008	1013	1009	1006	999			
55	861	865	866	870	867	866	860	858	875	874	882	886	891	887	883	877			
60	730	734	736	740	737	736	730	728	745	744	752	756	762	759	754	747			
65	595	600	601	606	603	601	595	592	610	610	618	622	628	625	620	613			
70	460	464	465	471	467	464	458	456	473	473	481	486	492	489	484	478			
75	327	331	331	337	333	331	324	322	338	338	347	351	358	354	350	344			
80	202	205	204	208	205	202	196	194	209	209	217	222	228	225	222	217			
85	89.5	89.7	89.1	90.3	88.6	85.0	81.9	80.1	93.6	93.8	98.5	103	108	106	103	102			
90	3.56	4.39	4.13	2.96	2.23	1.90	2.18	2.36	4.84	5.42	5.90	6.24	6.30	7.14	7.05	7.90			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks: