
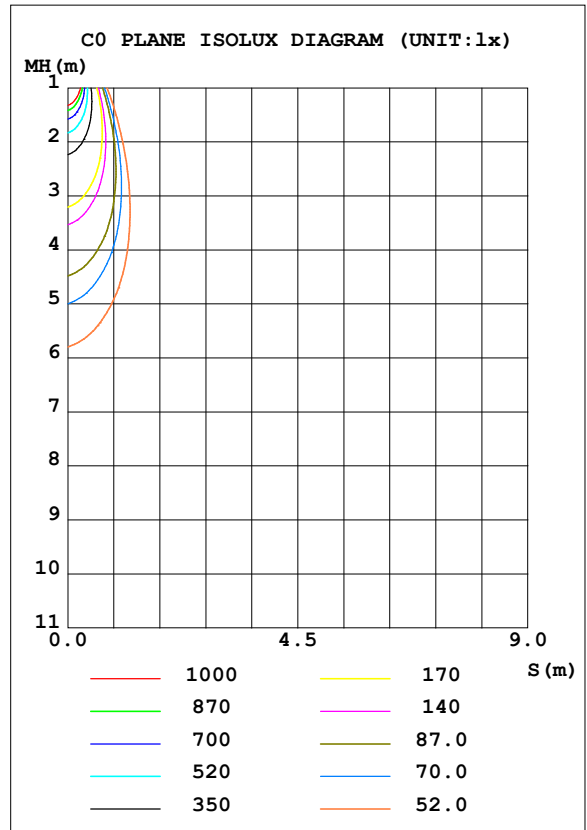


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.81V I:0.0594A P:13.246W PF:0.9232 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:903.76x1 lm		
NAME: DM13W-36DEG 3000K	TYPE: 13W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 68.23 lm/W			
MODEL	DM13W-36DEG 3000K	I <sub>max</sub> (cd)	1761	S/MH (C0/180)	0.66
NOMINAL POWER (W)	13	LOR (%)	100.0	S/MH (C90/270)	0.61
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	903.76	<input type="checkbox"/> UP, DN (C0-180)	0.5, 46.6
NOMINAL FLUX (lm)	903.76	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.4, 52.5
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.9	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	<input type="checkbox"/> down (%)	99.1	CIBSE SHR MAX	0.65

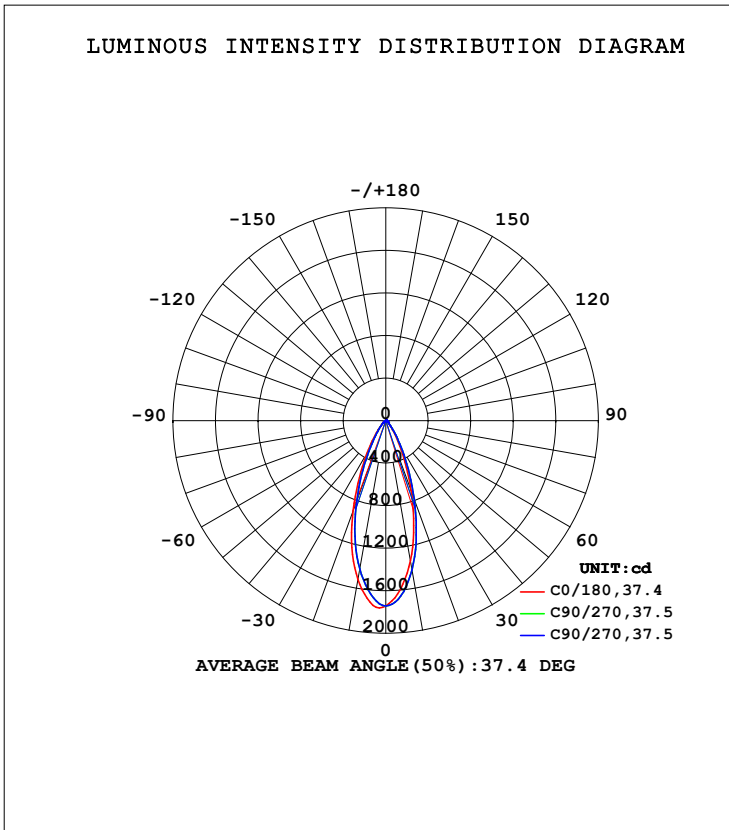

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity: 65.0%  
 Test Distance: 8.690m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

mm	C0	C90	C180	C270				mm	□ zone	□ total	%lum, lamp
10	1337	1424	1515	1415				0- 10	150.0	150.0	16.6,16.6
20	698.2	783.8	898.2	796.8				10- 20	307.2	457.3	50.6,50.6
30	246.5	289.1	357.0	294.2				20- 30	234.0	691.3	76.5,76.5
40	76.28	92.29	113.4	89.60				30- 40	108.6	799.9	88.5,88.5
50	33.03	37.50	40.69	35.00				40- 50	44.14	844.0	93.4,93.4
60	19.96	21.19	22.65	20.64				50- 60	24.81	868.8	96.1,96.1
70	10.94	11.50	12.96	11.97				60- 70	16.19	885.0	97.9,97.9
80	4.083	4.580	5.940	5.132				70- 80	8.657	893.7	98.9,98.9
90	0.1224	0.0856	0.0911	0.1050				80- 90	2.145	895.8	99.1,99.1
100	0.1320	0.1247	0.1093	0.0917				90-100	0.1121	895.9	99.1,99.1
110	0.1822	0.2082	0.1703	0.1099				100-110	0.1396	896.1	99.1,99.1
120	0.4545	0.4587	0.3221	0.2872				110-120	0.2529	896.3	99.2,99.2
130	1.178	1.115	0.7607	0.7693				120-130	0.5562	896.9	99.2,99.2
140	2.508	2.371	1.763	1.831				130-140	1.140	898.0	99.4,99.4
150	4.105	4.005	3.253	3.361				140-150	1.795	899.8	99.6,99.6
160	5.168	5.191	4.604	4.686				150-160	2.002	901.8	99.8,99.8
170	5.360	5.384	5.138	5.170				160-170	1.455	903.3	99.9,99.9
180	5.345	5.397	5.345	5.324				170-180	0.5052	903.8	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

0 - 45 DEG Zonal Flux:826.13      %lum: 91.4%

0 - 60 DEG Zonal Flux:868.81      %lum: 96.1%

All measured values may vary less than 35 %

from the average measured value in the 0 to 130 deg. zone: 5.2%

All measured values in the 0 to 130 deg. zone


may vary less than 50% from the average value of itself: 7.6%

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

□ Range: 0 - 180DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:230.81V I:0.0594A P:13.246W PF:0.9232 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:903.76x1 lm		
NAME: DM13W-36DEG 3000K	TYPE: 13W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

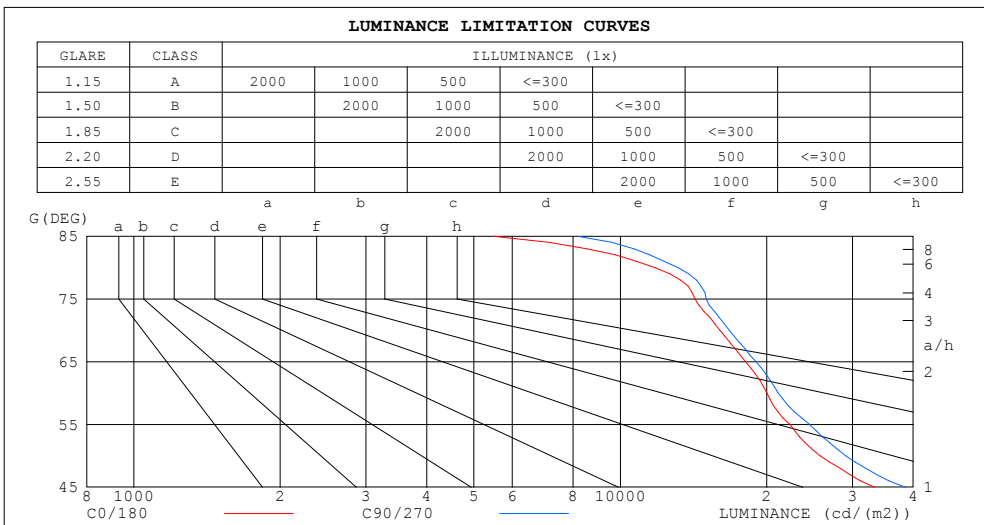

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5489	8186
80	11794	13147
75	14250	15014
70	16042	16754
65	18085	19012
60	20018	21122
55	22340	24507
50	25775	29079
45	33320	38532


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.81V I:0.0594A P:13.246W PF:0.9232 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:903.76x1 lm		
NAME: DMI3W-36DEG 3000K	TYPE: 13W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	1.00	.99	.97	.97	.95	.94	.93
2.0	1.03	.99	.96	1.01	.98	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.86
3.0	.96	.91	.88	.95	.90	.87	.92	.88	.85	.90	.87	.84	.87	.85	.82	.81
4.0	.91	.85	.81	.89	.84	.81	.87	.83	.80	.85	.81	.78	.83	.80	.78	.76
5.0	.85	.80	.76	.84	.79	.75	.82	.78	.75	.81	.77	.74	.79	.76	.73	.72
6.0	.81	.75	.71	.80	.75	.71	.78	.74	.70	.77	.73	.70	.76	.72	.69	.68
7.0	.77	.71	.67	.76	.71	.67	.75	.70	.66	.73	.69	.66	.72	.68	.65	.64
8.0	.73	.67	.63	.72	.67	.63	.71	.66	.63	.70	.66	.63	.69	.65	.62	.61
9.0	.69	.64	.60	.69	.64	.60	.68	.63	.60	.67	.63	.60	.66	.62	.59	.58
10.0	.66	.61	.57	.66	.61	.57	.65	.60	.57	.64	.60	.57	.63	.59	.57	.55

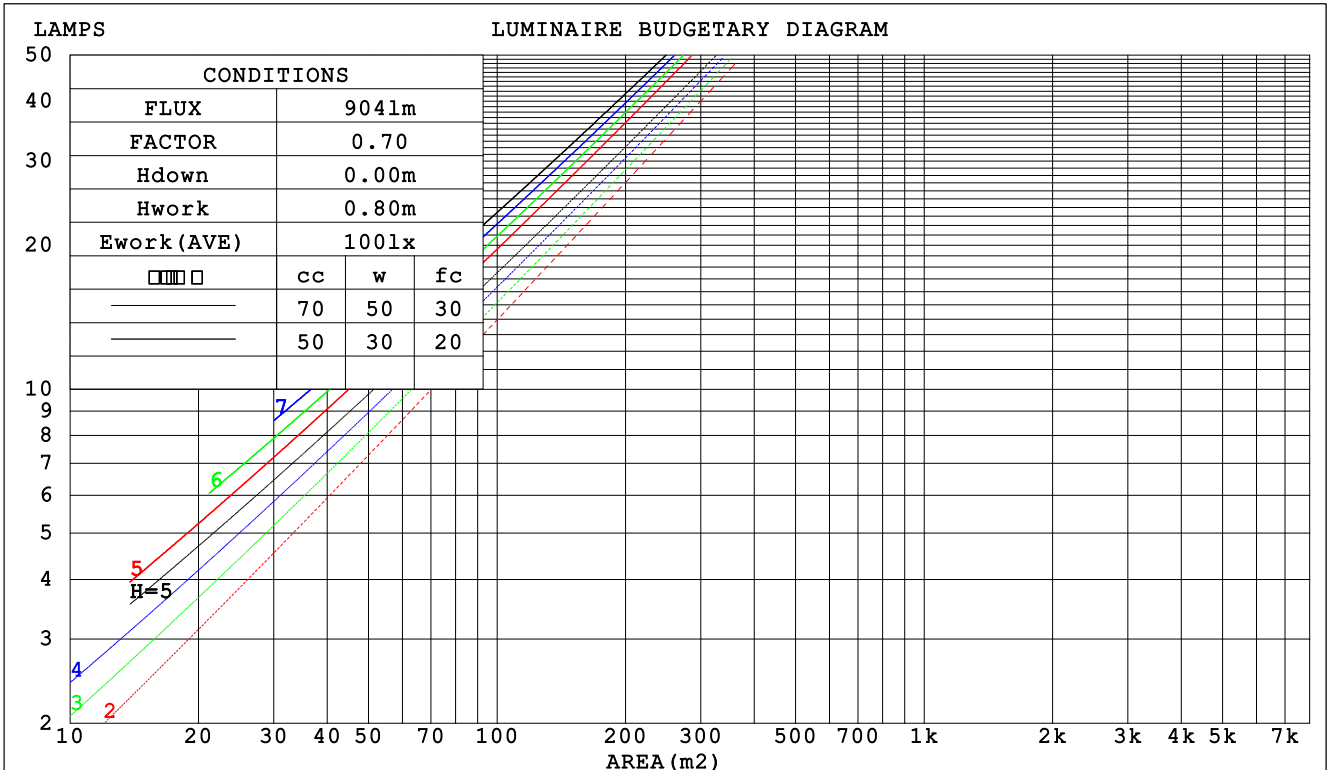

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

□ Range: 0 - 180DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:230.81V I:0.0594A P:13.246W PF:0.9232 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:903.76x1 lm		
NAME: DML3W-36DEG 3000K	TYPE: 13W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.180	.102	.032	.173	.098	.031	.160	.092	.029	.148	.085	.027	.136	.079	.025	
2.0	.170	.093	.029	.164	.090	.028	.153	.085	.026	.143	.080	.025	.133	.075	.024	
3.0	.160	.085	.025	.155	.083	.025	.145	.079	.024	.137	.075	.023	.129	.071	.022	
4.0	.151	.078	.023	.146	.077	.023	.138	.073	.022	.131	.070	.021	.124	.067	.020	
5.0	.142	.073	.021	.139	.071	.021	.131	.068	.020	.125	.066	.020	.119	.063	.019	
6.0	.135	.068	.019	.132	.066	.019	.125	.064	.019	.119	.062	.018	.114	.060	.018	
7.0	.128	.063	.018	.125	.062	.018	.120	.060	.017	.114	.059	.017	.110	.057	.017	
8.0	.122	.060	.017	.119	.059	.017	.114	.057	.016	.110	.056	.016	.105	.054	.016	
9.0	.116	.056	.016	.114	.056	.016	.110	.054	.015	.105	.053	.015	.102	.052	.015	
10.0	.111	.053	.015	.109	.053	.015	.105	.052	.015	.101	.050	.014	.098	.049	.014	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.197	.197	.197	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.178	.164	.151	.152	.141	.130	.104	.097	.090	.060	.056	.052	.019	.018	.017	
2.0	.163	.139	.120	.139	.120	.103	.096	.083	.072	.055	.048	.042	.018	.016	.014	
3.0	.150	.120	.097	.129	.104	.084	.088	.072	.059	.051	.042	.035	.016	.014	.011	
4.0	.139	.106	.080	.120	.091	.069	.082	.064	.049	.048	.037	.029	.015	.012	.010	
5.0	.130	.094	.067	.112	.081	.058	.077	.057	.041	.045	.033	.024	.014	.011	.008	
6.0	.122	.085	.057	.105	.073	.050	.073	.051	.035	.042	.030	.021	.014	.010	.007	
7.0	.116	.077	.050	.099	.067	.043	.069	.047	.031	.040	.028	.018	.013	.009	.006	
8.0	.110	.071	.044	.094	.061	.038	.065	.043	.027	.038	.025	.016	.012	.008	.005	
9.0	.104	.065	.039	.090	.057	.034	.062	.040	.024	.036	.024	.014	.012	.008	.005	
10.0	.099	.061	.035	.086	.053	.031	.060	.037	.022	.035	.022	.013	.011	.007	.004	

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:230.81V I:0.0594A P:13.246W PF:0.9232 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:903.76x1 lm		
NAME: DM13W-36DEG 3000K	TYPE: 13W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.4	20.3	19.6	20.5	20.6	19.9	20.8	20.1	21.0	21.1
3H	20.0	20.8	20.2	21.0	21.2	20.4	21.3	20.7	21.5	21.7
4H	20.2	21.0	20.5	21.2	21.5	20.7	21.5	20.9	21.7	21.9
6H	20.4	21.1	20.7	21.4	21.7	20.8	21.6	21.1	21.8	22.1
8H	20.4	21.1	20.7	21.4	21.7	20.9	21.6	21.2	21.9	22.1
12H	20.4	21.1	20.7	21.4	21.7	20.9	21.6	21.2	21.8	22.1
4H 2H	19.6	20.4	19.9	20.6	20.8	20.0	20.8	20.3	21.0	21.3
3H	20.4	21.0	20.7	21.3	21.6	20.7	21.4	21.1	21.7	22.0
4H	20.7	21.3	21.1	21.7	22.0	21.1	21.7	21.4	22.0	22.3
6H	21.0	21.5	21.4	21.9	22.3	21.4	21.9	21.7	22.3	22.6
8H	21.0	21.5	21.4	21.9	22.3	21.4	21.9	21.8	22.3	22.7
12H	21.0	21.5	21.4	21.9	22.3	21.4	21.9	21.9	22.3	22.7
8H 4H	20.8	21.3	21.2	21.7	22.1	21.2	21.7	21.6	22.0	22.4
6H	21.2	21.6	21.6	22.0	22.4	21.5	21.9	22.0	22.4	22.8
8H	21.3	21.6	21.7	22.1	22.5	21.6	22.0	22.1	22.4	22.9
12H	21.3	21.6	21.7	22.0	22.5	21.7	22.0	22.1	22.4	22.9
12H 4H	20.8	21.3	21.2	21.7	22.1	21.1	21.6	21.6	22.0	22.4
6H	21.2	21.5	21.6	22.0	22.4	21.5	21.9	22.0	22.3	22.8
8H	21.3	21.6	21.8	22.1	22.5	21.6	22.0	22.1	22.4	22.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.8 / - 1.0					+ 1.0 / - 1.0				
1.5H	+ 1.5 / - 0.8					+ 2.0 / - 0.8				
2.0H	+ 0.9 / - 0.6					+ 1.1 / - 0.6				

CIE Pub.117, 903.8 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.4)  
Area: 0.002 m2

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
Humidity:65.0%  
Test Distance:8.690m [K=1.0000]  
Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:230.81V I:0.0594A P:13.246W PF:0.9232 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:903.76x1 lm		
NAME: DM13W-36DEG 3000K	TYPE: 13W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	84	78	74	84	77	73	83	77	73	69
0.80	92	86	82	91	85	81	90	85	81	77
1.00	97	91	87	96	90	86	94	90	86	82
1.25	101	95	92	100	95	91	98	93	90	86
1.50	104	99	95	103	98	95	100	96	93	88
2.00	107	102	99	105	101	98	103	99	96	91
2.50	109	105	101	107	103	100	104	101	98	92
3.00	111	107	104	109	105	103	105	103	100	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	106	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:230.81V I:0.0594A P:13.246W PF:0.9232 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:903.76x1 lm		
NAME: DM13W-36DEG 3000K	TYPE: 13W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

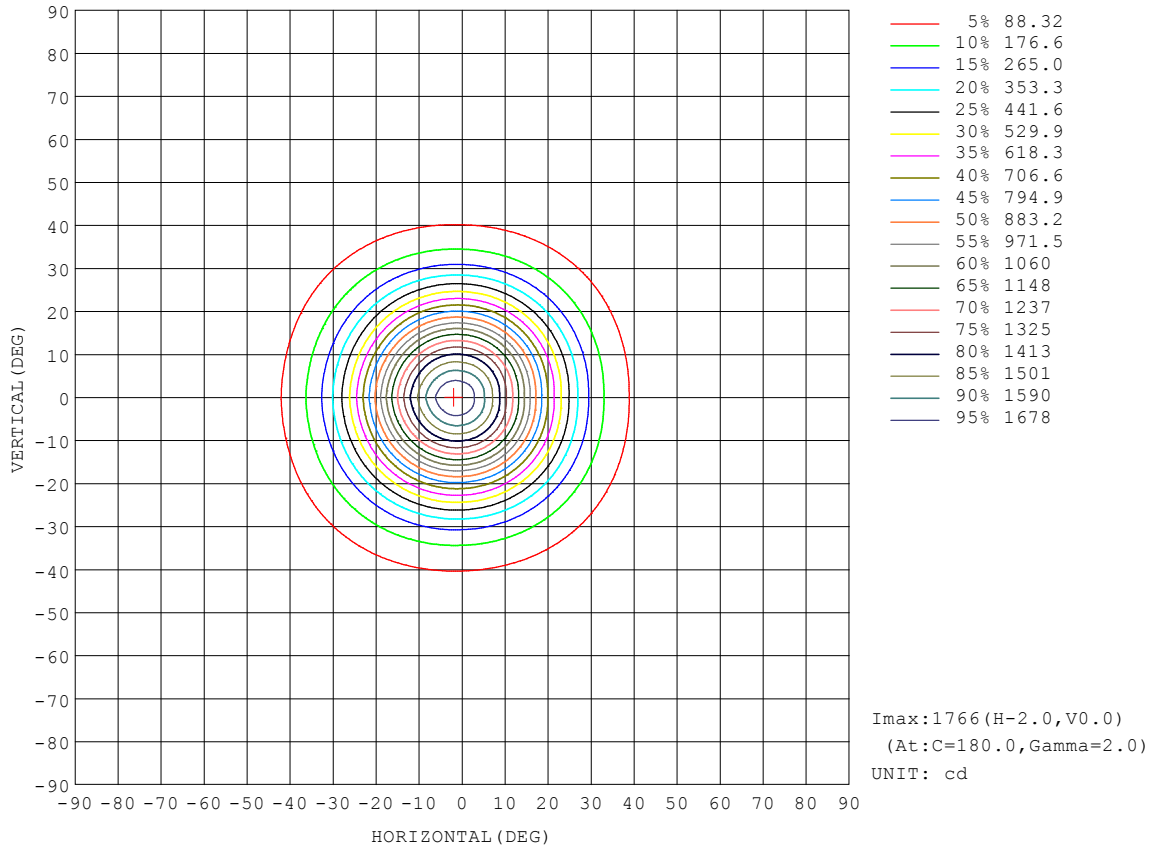


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:230.81V I:0.0594A P:13.246W PF:0.9232 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:903.76x1 lm		
NAME: DM13W-36DEG 3000K	TYPE: 13W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

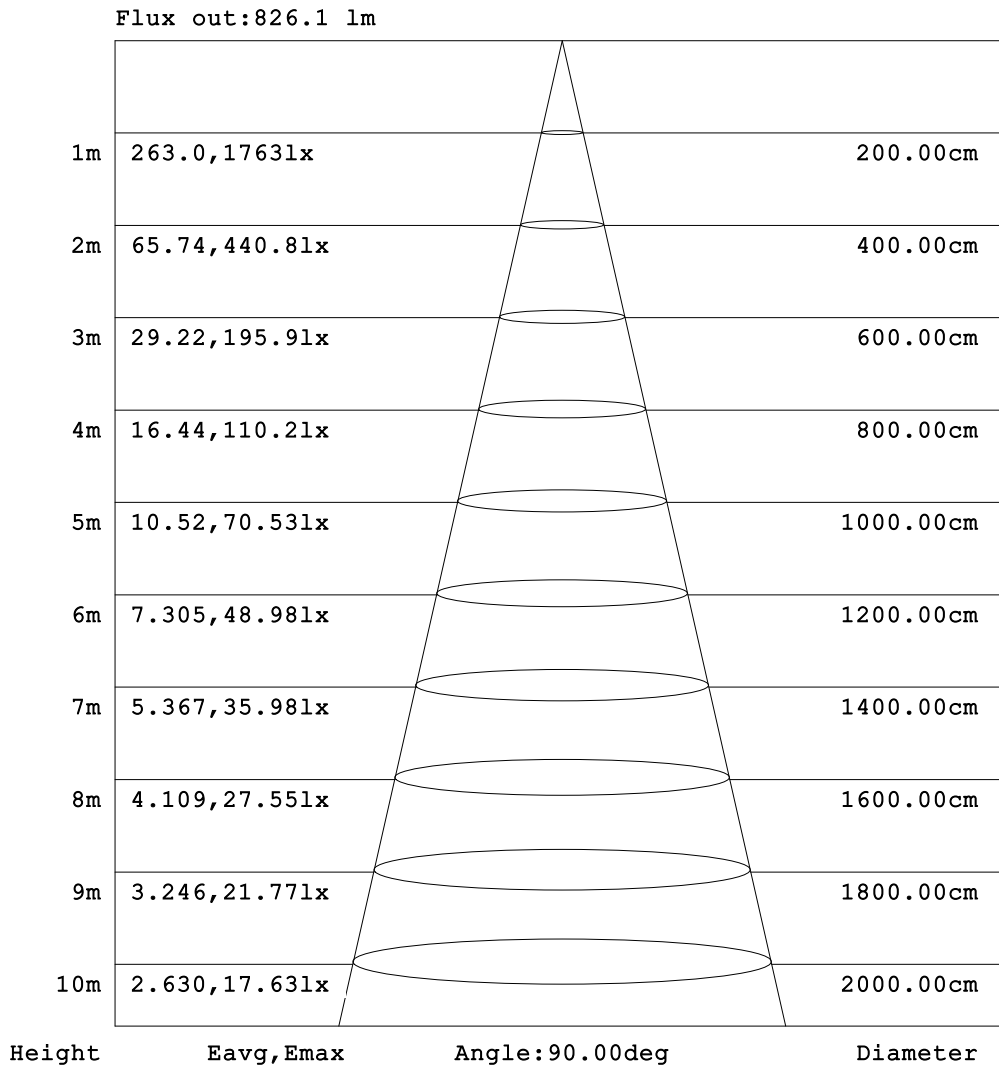


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:230.81V I:0.0594A P:13.246W PF:0.9232 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:903.76x1 lm		
NAME: DM13W-36DEG 3000K	TYPE: 13W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

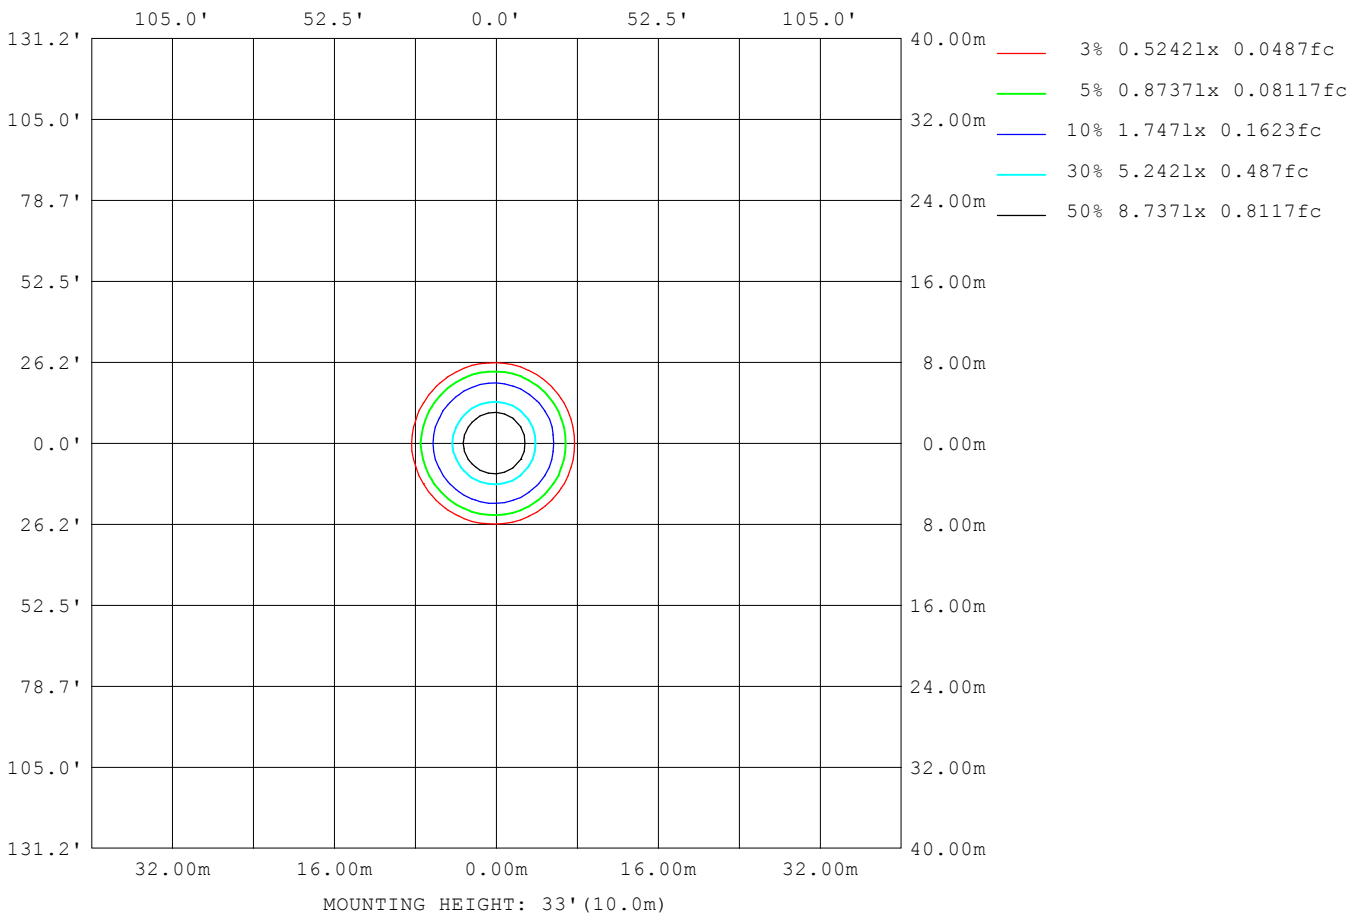

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:230.81V I:0.0594A P:13.246W PF:0.9232 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:903.76x1 lm		
NAME: DM13W-36DEG 3000K	TYPE: 13W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	19438
L_0~180 (75) av	15786
L_0~180 (85) av	10129
L_90~270 (65) av	19190
L_90~270 (75) av	15430
L_90~270 (85) av	9475
L_45 (65) av	19371
L_45 (75) av	15663
L_45 (85) av	10011

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

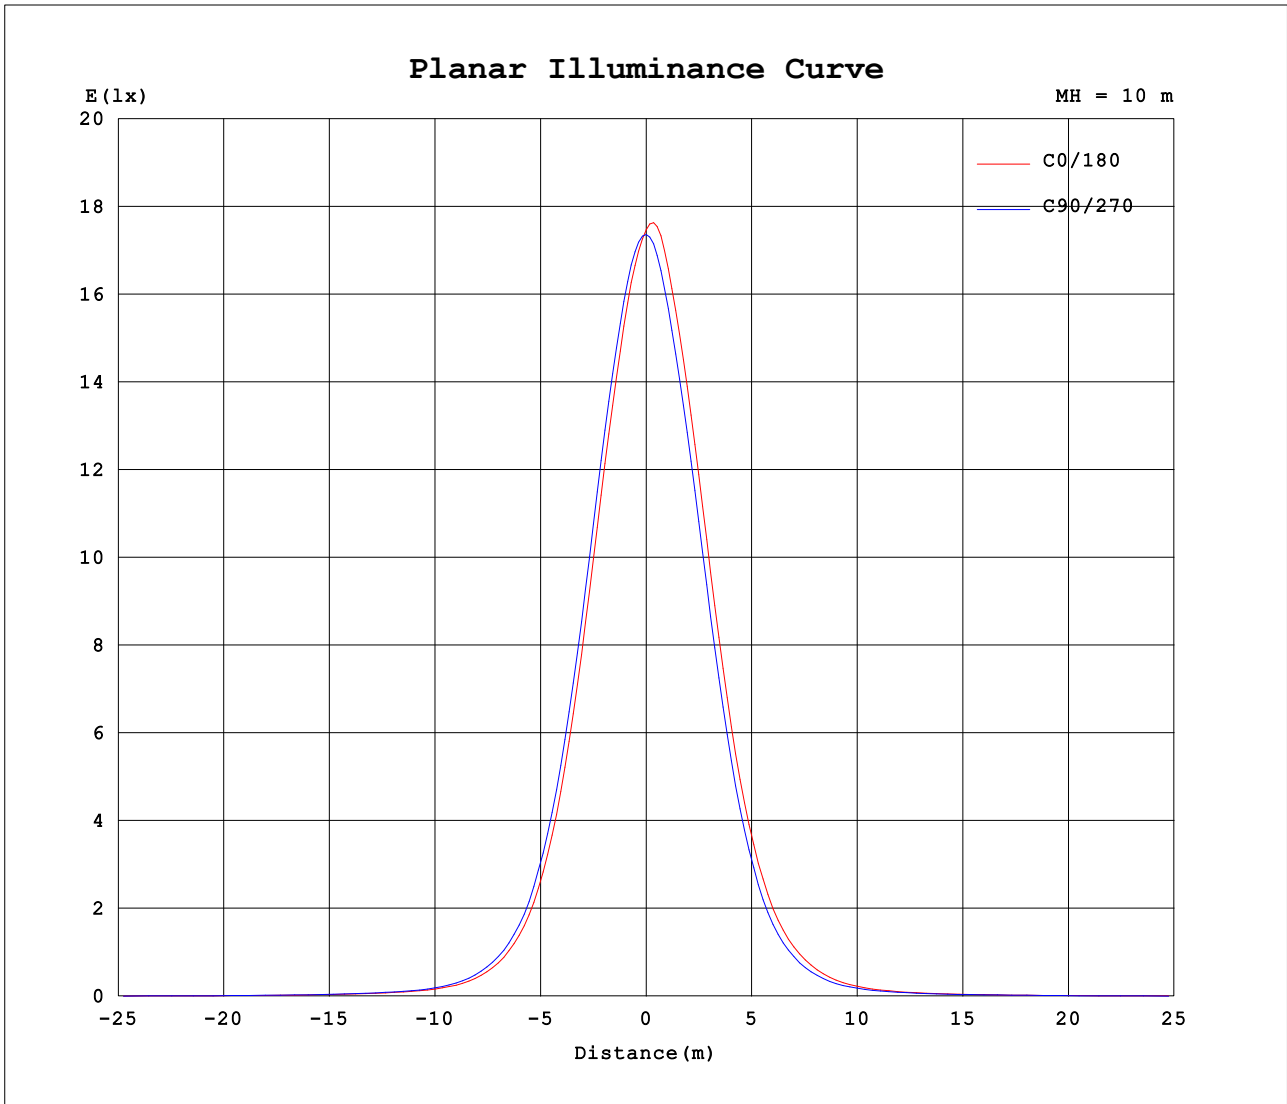

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity: 65.0%  
 Test Distance: 8.690m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.81V I:0.0594A P:13.246W PF:0.9232 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:903.76x1 lm		
NAME: DMI3W-36DEG 3000K	TYPE: 13W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	90	180	270															
0	1742	1742	1742	1742															
5	1593	1653	1714	1637															
10	1337	1424	1515	1415															
15	1022	1115	1235	1126															
20	698	784	898	797															
25	433	500	590	510															
30	247	289	357	294															
35	139	165	204	165															
40	76.3	92.3	113	89.6															
45	47.0	54.7	64.1	52.3															
50	33.0	37.5	40.7	35.0															
55	25.5	28.2	29.6	26.3															
60	20.0	21.2	22.7	20.6															
65	15.2	16.1	17.6	16.3															
70	10.9	11.5	13.0	12.0															
75	7.35	7.80	8.99	8.18															
80	4.08	4.58	5.94	5.13															
85	0.95	1.43	2.58	1.87															
90	0.12	0.09	0.09	0.11															
95	0.13	0.10	0.09	0.09															
100	0.13	0.12	0.11	0.09															
105	0.14	0.16	0.13	0.09															
110	0.18	0.21	0.17	0.11															
115	0.28	0.31	0.22	0.18															
120	0.45	0.46	0.32	0.29															
125	0.75	0.72	0.49	0.47															
130	1.18	1.12	0.76	0.77															
135	1.78	1.68	1.18	1.21															
140	2.51	2.37	1.76	1.83															
145	3.31	3.19	2.47	2.56															
150	4.11	4.00	3.25	3.36															
155	4.75	4.73	4.01	4.11															
160	5.17	5.19	4.60	4.69															
165	5.36	5.37	4.98	5.05															
170	5.36	5.38	5.14	5.17															
175	5.36	5.39	5.24	5.21															
180	5.34	5.40	5.34	5.32															

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

□ Range: 0 - 180DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks: