
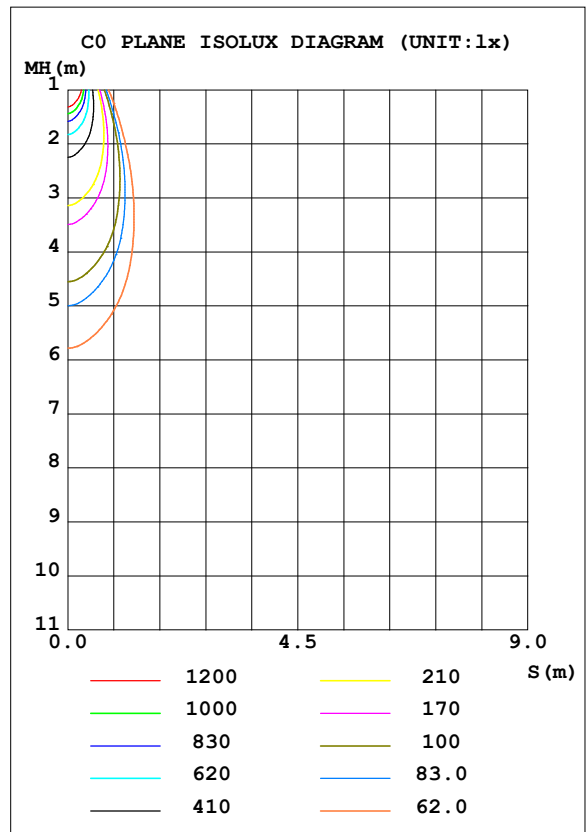


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.47V I:0.0595A P:12.742W PF:0.9208 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1065.43x1 lm		
NAME: DM13W-36DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 83.62 lm/W			
MODEL	DM13W-36DEG 4000K	I <sub>max</sub> (cd)	2072	S/MH (C0/180)	0.61
NOMINAL POWER (W)	13	LOR (%)	100.0	S/MH (C90/270)	0.62
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1065.4	<input type="checkbox"/> UP, DN (C0-180)	0.5, 49.0
NOMINAL FLUX (lm)	1065.43	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.4, 50.1
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.9	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	<input type="checkbox"/> down (%)	99.1	CIBSE SHR MAX	0.65

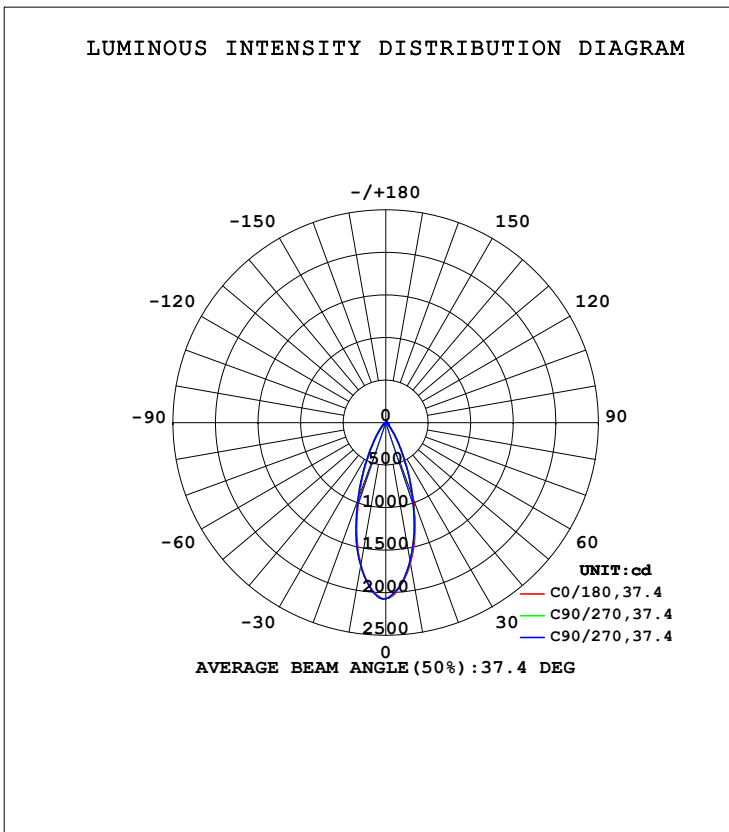

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity: 65.0%  
 Test Distance: 8.690m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C90	C180	C270					mm	□ zone	□ total	%lum,lamp
10	1676	1647	1694	1705					0- 10	177.3	177.3	16.6,16.6
20	941.3	919.3	926.4	960.3					10- 20	362.7	539.9	50.7,50.7
30	349.3	342.3	350.9	362.6					20- 30	276.0	815.9	76.6,76.6
40	106.5	105.3	110.5	112.4					30- 40	127.9	943.8	88.6,88.6
50	41.45	42.37	44.36	42.92					40- 50	51.64	995.4	93.4,93.4
60	24.52	24.59	25.06	24.67					50- 60	29.04	1024	96.2,96.2
70	14.14	14.07	13.51	13.68					60- 70	18.95	1043	97.9,97.9
80	6.124	5.898	5.331	5.672					70- 80	10.11	1054	98.9,98.9
90	0.1862	0.1036	0.1322	0.3906					80- 90	2.494	1056	99.1,99.1
100	0.1278	0.1467	0.1278	0.1457					90-100	0.1619	1056	99.1,99.1
110	0.1882	0.2565	0.2069	0.1465					100-110	0.1666	1056	99.1,99.1
120	0.4737	0.5558	0.4267	0.3351					110-120	0.2979	1057	99.2,99.2
130	1.209	1.353	1.029	0.8904					120-130	0.6517	1057	99.2,99.2
140	2.658	2.862	2.311	2.115					130-140	1.337	1059	99.4,99.4
150	4.549	4.777	4.124	3.922					140-150	2.116	1061	99.6,99.6
160	5.974	6.120	5.599	5.489					150-160	2.361	1063	99.8,99.8
170	6.329	6.303	6.086	6.058					160-170	1.716	1065	99.9,99.9
180	6.310	6.314	6.316	6.253					170-180	0.5939	1065	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

0 - 45 DEG Zonal Flux:974.53      %lum: 91.5%  
 0 - 60 DEG Zonal Flux:1024.5      %lum: 96.2%  
 All measured values may vary less than 35 %  
 from the average measured value in the 0 to 130 deg. zone: 5.0%  
 All measured values in the 0 to 130 deg. zone  
 may vary less than 50% from the average value of itself: 7.6%

C Range: 0 - 360DEG	□ Range: 0 - 180DEG
C Interval: 90.0DEG	□ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.690m [K=1.0000]
Test Date:2022-06-28	Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:230.47V I:0.0595A P:12.742W PF:0.9208 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1065.43x1 lm		
NAME: DM13W-36DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

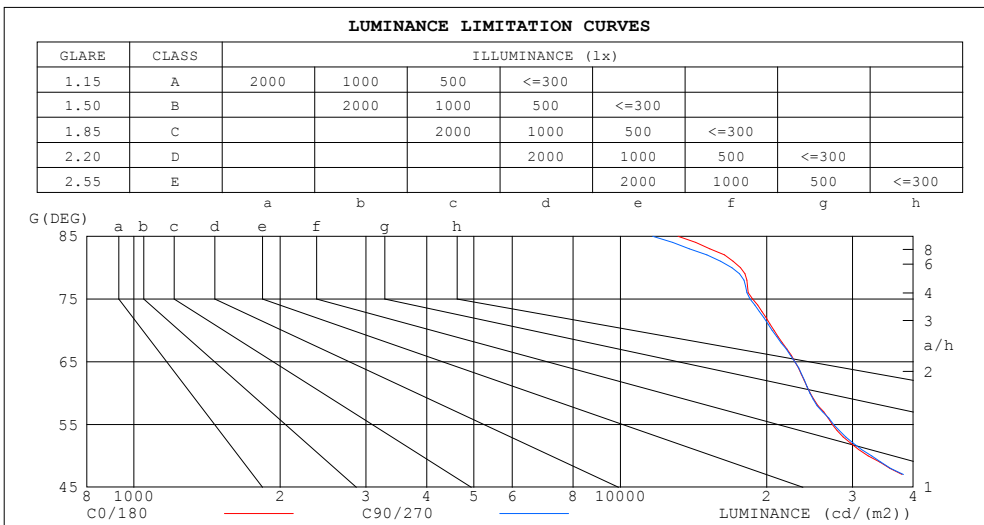

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	13152	11665
80	17672	16945
75	18714	18480
70	20715	20527
65	22867	22845
60	24572	24532
55	27295	27458
50	32314	32881
45	44264	43396


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.47V I:0.0595A P:12.742W PF:0.9208 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1065.43x1 lm		
NAME: DMI3W-36DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	1.00	.99	.97	.97	.95	.94	.93
2.0	1.03	.99	.96	1.01	.98	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.86
3.0	.96	.91	.88	.95	.90	.87	.92	.88	.85	.90	.87	.84	.87	.85	.83	.81
4.0	.91	.85	.81	.89	.84	.81	.87	.83	.80	.85	.81	.79	.83	.80	.78	.76
5.0	.85	.80	.76	.84	.79	.75	.83	.78	.75	.81	.77	.74	.79	.76	.73	.72
6.0	.81	.75	.71	.80	.75	.71	.78	.74	.70	.77	.73	.70	.76	.72	.69	.68
7.0	.77	.71	.67	.76	.71	.67	.75	.70	.66	.73	.69	.66	.72	.68	.66	.64
8.0	.73	.67	.63	.72	.67	.63	.71	.66	.63	.70	.66	.63	.69	.65	.62	.61
9.0	.69	.64	.60	.69	.64	.60	.68	.63	.60	.67	.63	.60	.66	.62	.59	.58
10.0	.66	.61	.57	.66	.61	.57	.65	.60	.57	.64	.60	.57	.63	.60	.57	.55

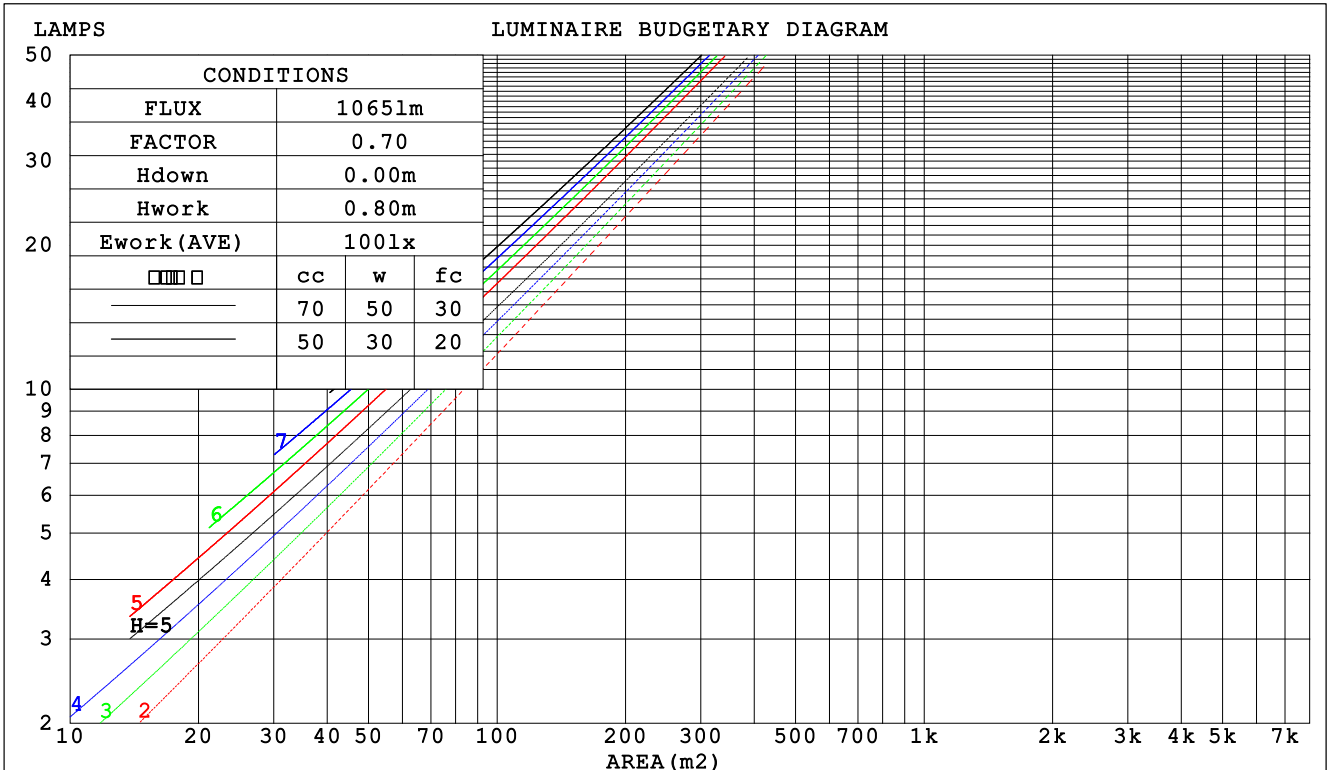

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

□ Range: 0 - 180DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:230.47V I:0.0595A P:12.742W PF:0.9208 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1065.43x1 lm		
NAME: DMI3W-36DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.179 .102 .032	.172 .098 .031	.159 .091 .029	.147 .085 .027	.136 .079 .025	
2.0	.170 .093 .029	.164 .090 .028	.153 .085 .026	.142 .080 .025	.133 .075 .024	
3.0	.160 .085 .025	.155 .083 .025	.145 .079 .024	.136 .075 .023	.128 .071 .022	
4.0	.150 .078 .023	.146 .076 .023	.138 .073 .022	.130 .070 .021	.123 .067 .020	
5.0	.142 .072 .021	.138 .071 .021	.131 .068 .020	.125 .066 .020	.118 .063 .019	
6.0	.135 .068 .019	.131 .066 .019	.125 .064 .019	.119 .062 .018	.114 .060 .018	
7.0	.128 .063 .018	.125 .062 .018	.119 .060 .017	.114 .059 .017	.109 .057 .017	
8.0	.122 .060 .017	.119 .059 .017	.114 .057 .016	.110 .056 .016	.105 .054 .016	
9.0	.116 .056 .016	.114 .056 .016	.109 .054 .015	.105 .053 .015	.101 .052 .015	
10.0	.111 .053 .015	.109 .053 .015	.105 .051 .014	.101 .050 .014	.098 .049 .014	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.197 .197 .197	.169 .169 .169	.115 .115 .115	.066 .066 .066	.021 .021 .021	
1.0	.178 .164 .151	.152 .141 .130	.104 .097 .090	.060 .056 .052	.019 .018 .017	
2.0	.163 .139 .120	.139 .120 .103	.096 .083 .072	.055 .048 .042	.018 .016 .014	
3.0	.150 .120 .097	.129 .104 .084	.088 .072 .059	.051 .042 .035	.016 .014 .011	
4.0	.139 .106 .080	.120 .091 .069	.082 .064 .049	.048 .037 .029	.015 .012 .010	
5.0	.130 .094 .067	.112 .081 .058	.077 .057 .041	.045 .033 .024	.014 .011 .008	
6.0	.122 .085 .057	.105 .073 .050	.073 .051 .035	.042 .030 .021	.014 .010 .007	
7.0	.116 .077 .050	.099 .067 .043	.069 .047 .031	.040 .028 .018	.013 .009 .006	
8.0	.110 .071 .044	.094 .061 .038	.065 .043 .027	.038 .025 .016	.012 .008 .005	
9.0	.104 .065 .039	.090 .057 .034	.062 .040 .024	.036 .024 .014	.012 .008 .005	
10.0	.099 .061 .035	.086 .053 .031	.059 .037 .022	.035 .022 .013	.011 .007 .004	

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:230.47V I:0.0595A P:12.742W PF:0.9208 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1065.43x1 lm		
NAME: DM13W-36DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.5	21.4	20.7	21.6	21.8	20.4	21.3	20.6	21.5	21.7
3H	21.1	21.9	21.4	22.1	22.4	21.0	21.9	21.3	22.1	22.3
4H	21.4	22.2	21.7	22.4	22.6	21.3	22.1	21.6	22.3	22.5
6H	21.6	22.3	21.9	22.6	22.8	21.5	22.2	21.8	22.5	22.8
8H	21.7	22.4	22.0	22.6	22.9	21.6	22.3	21.9	22.5	22.8
12H	21.7	22.4	22.0	22.6	22.9	21.6	22.2	21.9	22.5	22.8
4H 2H	20.7	21.5	21.0	21.7	21.9	20.6	21.4	20.9	21.6	21.8
3H	21.5	22.1	21.8	22.4	22.7	21.4	22.1	21.7	22.4	22.6
4H	21.8	22.5	22.2	22.8	23.1	21.8	22.4	22.1	22.7	23.0
6H	22.2	22.7	22.6	23.1	23.4	22.1	22.6	22.5	23.0	23.4
8H	22.3	22.8	22.7	23.1	23.5	22.2	22.7	22.6	23.1	23.4
12H	22.3	22.8	22.7	23.2	23.6	22.2	22.7	22.6	23.1	23.5
8H 4H	21.9	22.4	22.3	22.8	23.2	21.9	22.4	22.3	22.7	23.1
6H	22.4	22.8	22.8	23.2	23.6	22.3	22.7	22.7	23.1	23.6
8H	22.5	22.9	23.0	23.3	23.8	22.4	22.8	22.9	23.3	23.7
12H	22.6	22.9	23.1	23.4	23.9	22.5	22.8	23.0	23.3	23.8
12H 4H	21.9	22.4	22.3	22.8	23.2	21.9	22.3	22.3	22.7	23.1
6H	22.4	22.8	22.8	23.2	23.7	22.3	22.7	22.8	23.1	23.6
8H	22.6	22.9	23.1	23.3	23.8	22.5	22.8	23.0	23.3	23.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.0 / - 1.0					+ 0.9 / - 1.0				
1.5H	+ 1.9 / - 0.8					+ 1.7 / - 0.8				
2.0H	+ 1.0 / - 0.6					+ 1.0 / - 0.6				

CIE Pub.117, 1065 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.2)  
Area: 0.002 m2

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
Humidity:65.0%  
Test Distance:8.690m [K=1.0000]  
Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:230.47V I:0.0595A P:12.742W PF:0.9208 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1065.43x1 lm		
NAME: DM13W-36DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	85	78	74	84	78	74	83	77	73	70
0.80	92	86	82	91	85	82	90	85	81	77
1.00	97	91	87	96	90	86	94	90	86	82
1.25	101	95	92	100	95	91	98	93	90	86
1.50	104	99	95	103	98	95	100	96	93	89
2.00	107	102	99	105	101	98	103	99	97	91
2.50	109	105	101	107	103	101	104	101	99	92
3.00	111	107	104	109	105	103	105	103	100	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	106	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:230.47V I:0.0595A P:12.742W PF:0.9208 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1065.43x1 lm		
NAME: DM13W-36DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

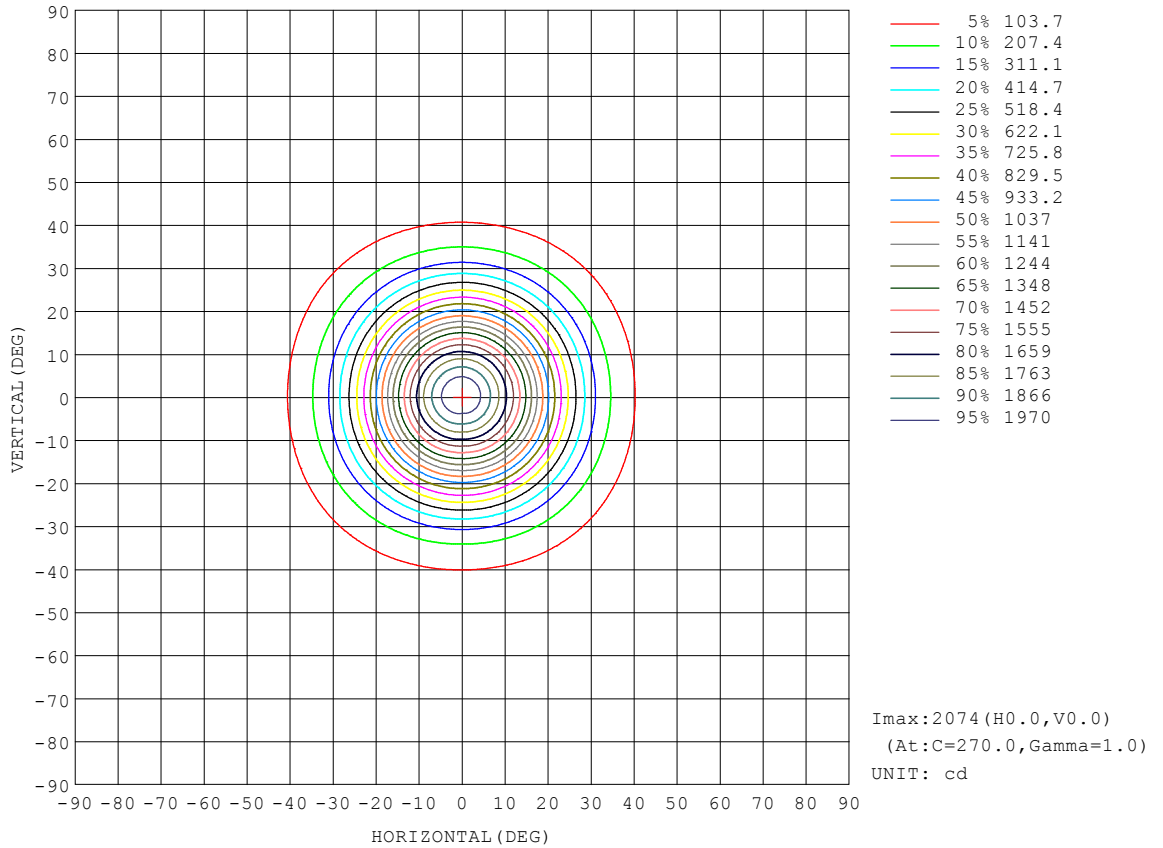


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:230.47V I:0.0595A P:12.742W PF:0.9208 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1065.43x1 lm		
NAME: DM13W-36DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

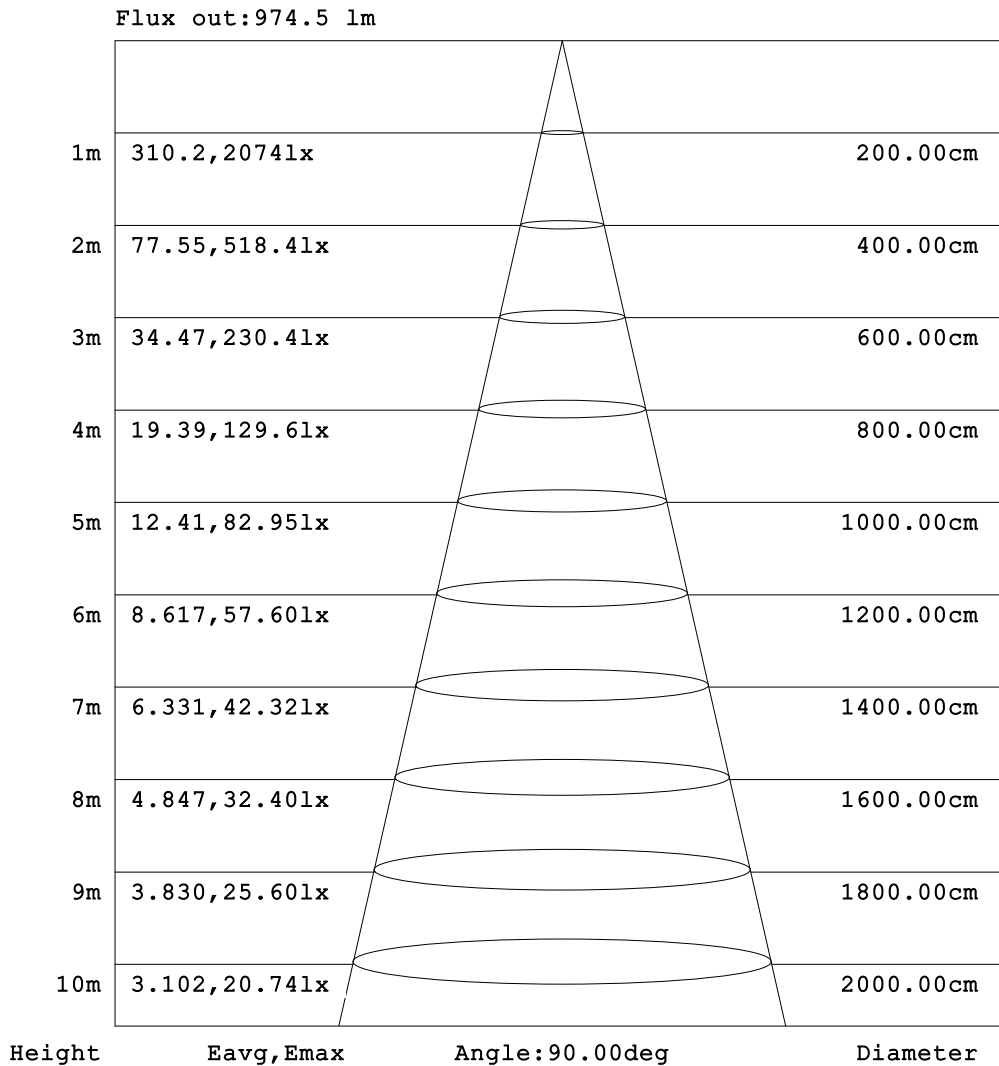


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:230.47V I:0.0595A P:12.742W PF:0.9208 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1065.43x1 lm		
NAME: DM13W-36DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

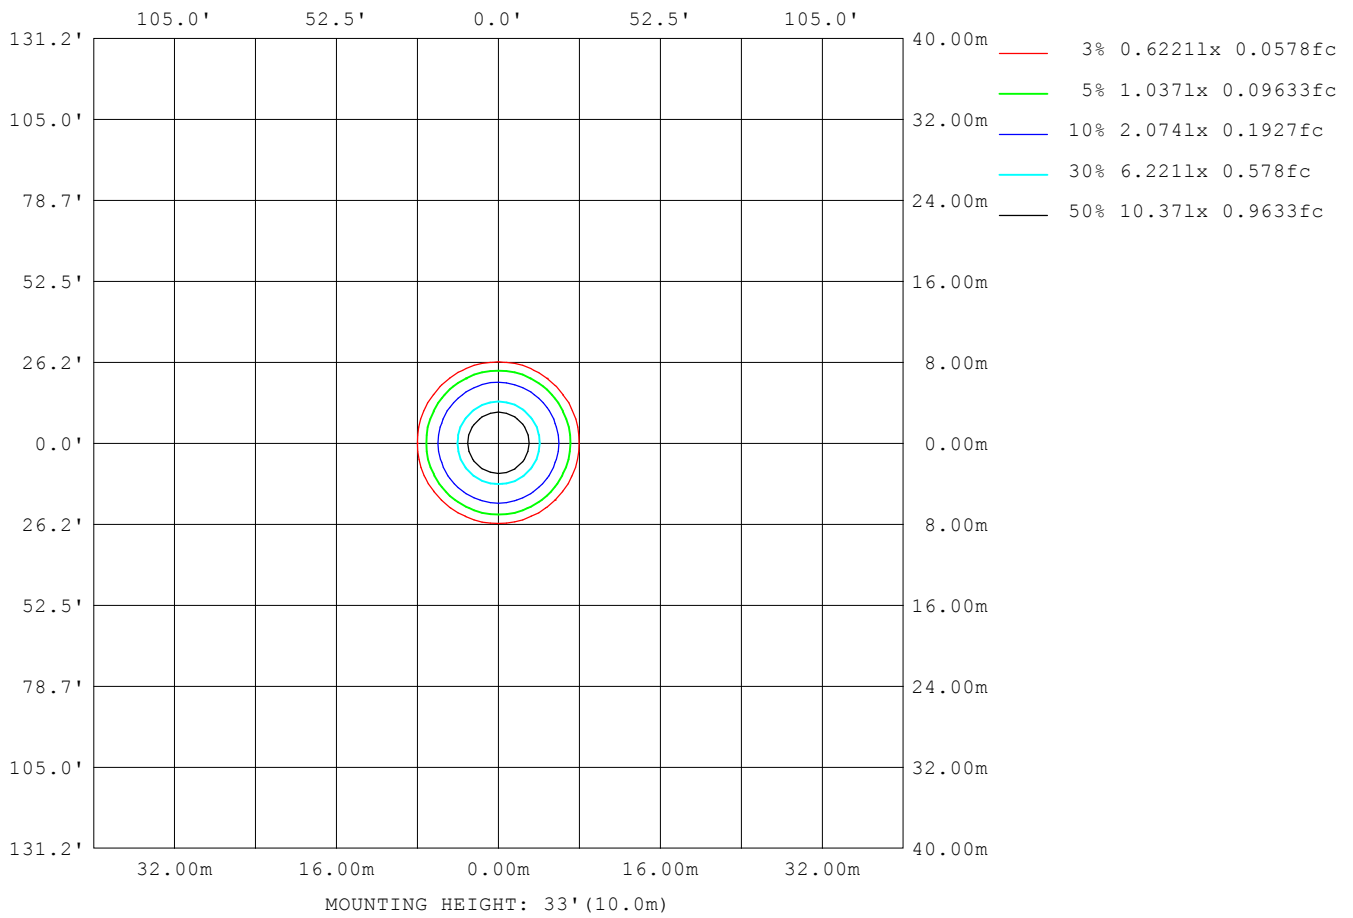

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:230.47V I:0.0595A P:12.742W PF:0.9208 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1065.43x1 lm		
NAME: DM13W-36DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	22613
L_0~180 (75) av	18077
L_0~180 (85) av	11260
L_90~270 (65) av	22710
L_90~270 (75) av	18155
L_90~270 (85) av	11733
L_45 (65) av	22660
L_45 (75) av	18088
L_45 (85) av	11439

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

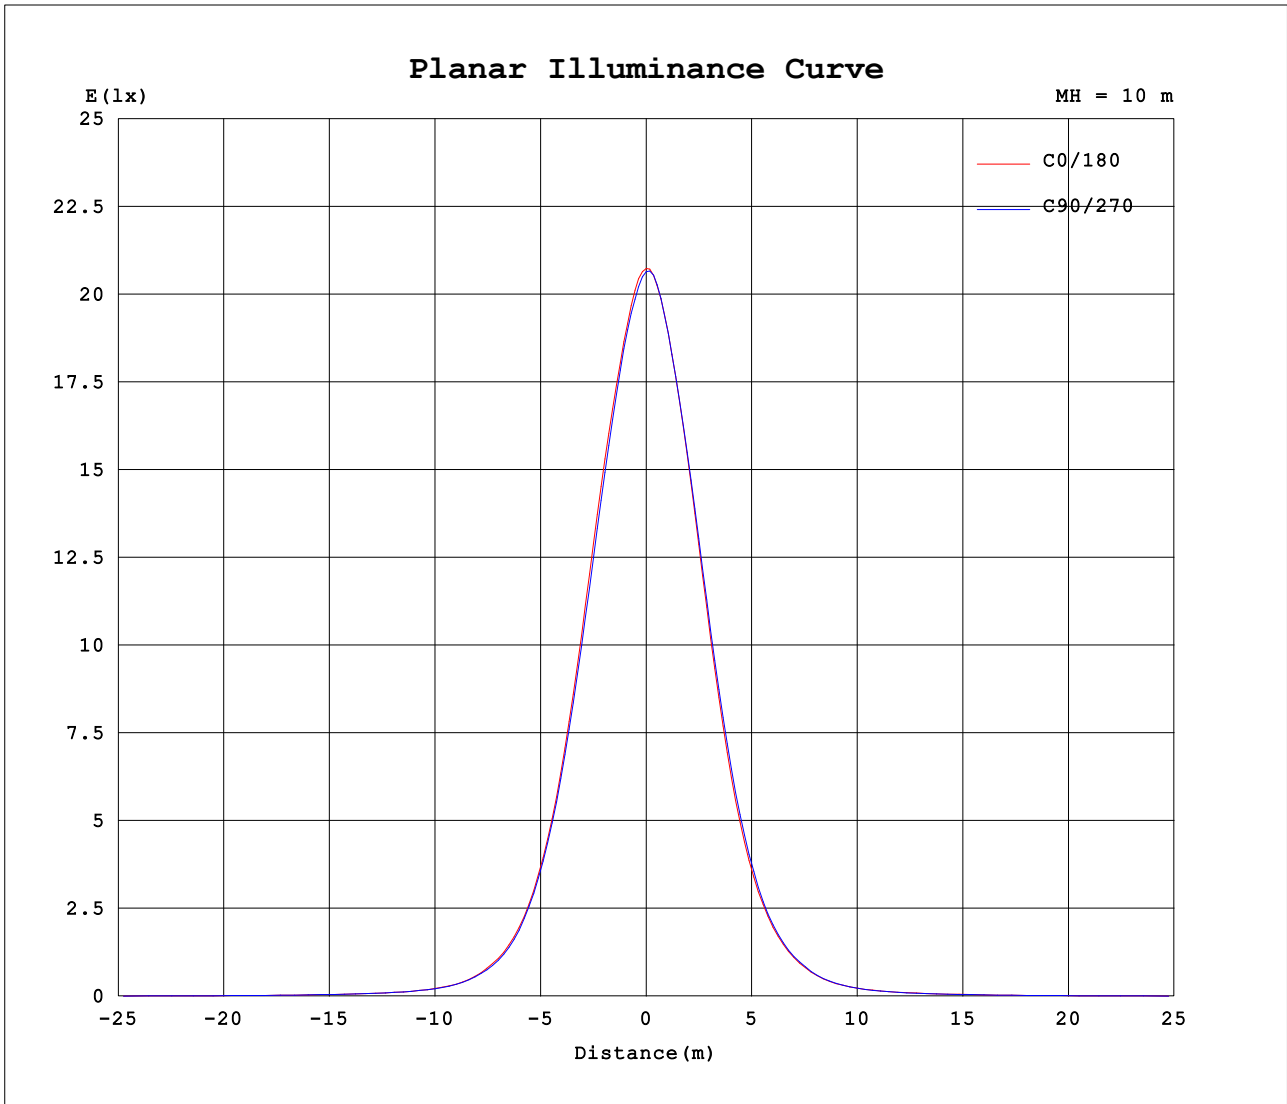

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.47V I:0.0595A P:12.742W PF:0.9208 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1065.43x1 lm		
NAME: DMI3W-36DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	90	180	270															
0	2069	2069	2069	2069															
5	1936	1926	1959	1967															
10	1676	1647	1694	1705															
15	1332	1295	1326	1354															
20	941	919	926	960															
25	601	589	589	618															
30	349	342	351	363															
35	196	187	200	207															
40	106	105	110	112															
45	62.5	61.5	65.4	65.0															
50	41.4	42.4	44.4	42.9															
55	31.2	31.6	33.4	32.1															
60	24.5	24.6	25.1	24.7															
65	19.3	19.4	18.9	19.0															
70	14.1	14.1	13.5	13.7															
75	9.67	9.59	9.05	9.21															
80	6.12	5.90	5.33	5.67															
85	2.29	2.04	1.64	2.05															
90	0.19	0.10	0.13	0.39															
95	0.13	0.12	0.11	0.16															
100	0.13	0.15	0.13	0.15															
105	0.13	0.19	0.16	0.13															
110	0.19	0.26	0.21	0.15															
115	0.29	0.37	0.29	0.21															
120	0.47	0.56	0.43	0.34															
125	0.75	0.87	0.66	0.55															
130	1.21	1.35	1.03	0.89															
135	1.86	2.00	1.58	1.42															
140	2.66	2.86	2.31	2.11															
145	3.60	3.82	3.19	2.99															
150	4.55	4.78	4.12	3.92															
155	5.37	5.59	4.97	4.81															
160	5.97	6.12	5.60	5.49															
165	6.28	6.32	5.95	5.90															
170	6.33	6.30	6.09	6.06															
175	6.34	6.31	6.17	6.11															
180	6.31	6.31	6.32	6.25															

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-06-28

□ Range: 0 - 180DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks: