
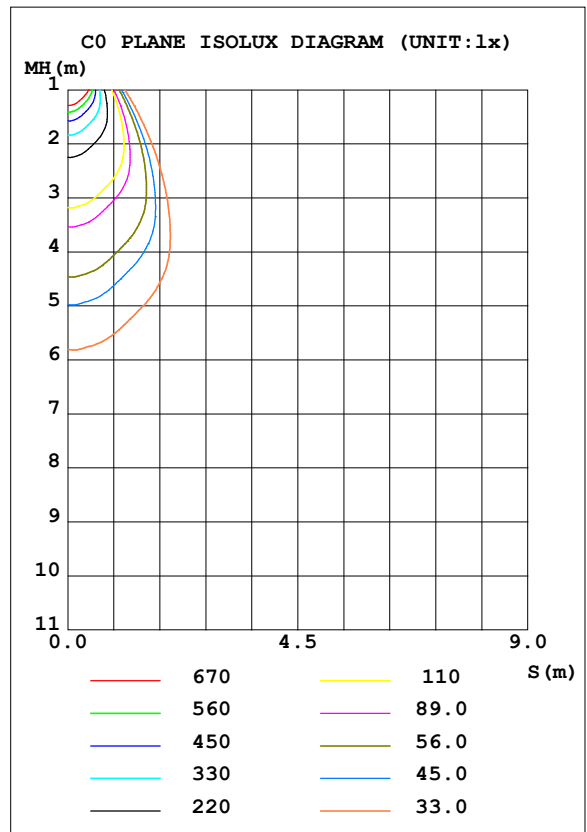


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.00V I:0.0556A P:12.269W PF:0.9595 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1146.94x1 lm		
NAME: DM13W-60DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 93.48 lm/W			
MODEL	DM13W-60DEG 4000K	I _{max} (cd)	1114	S/MH (C0/180)	0.84
NOMINAL POWER (W)	13	LOR (%)	100.0	S/MH (C90/270)	0.93
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1146.9	<input type="checkbox"/> UP, DN (C0-180)	0.5, 49.6
NOMINAL FLUX (lm)	1146.94	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.4, 49.5
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.9	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	230	<input type="checkbox"/> down (%)	99.1	CIBSE SHR MAX	0.95

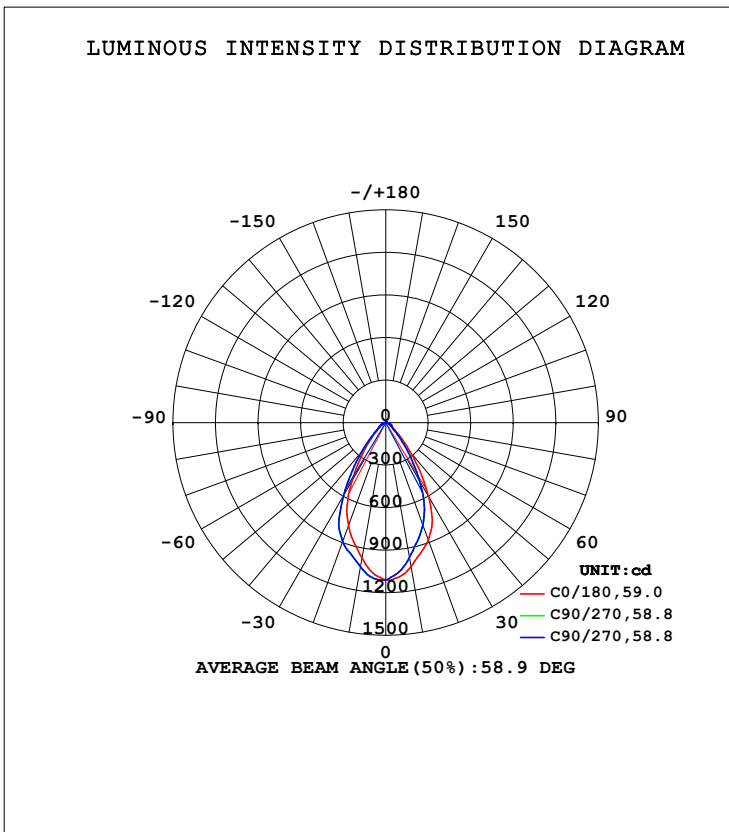

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-07-04

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 8.690m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C90	C180	C270				mm	□ zone	□ total	%lum, lamp
10	1031	965.7	970.0	1033				0- 10	100.4	100.4	8.75,8.75
20	880.5	765.8	771.5	890.8				10- 20	256.2	356.6	31.1,31.1
30	605.6	479.5	480.0	596.2				20- 30	320.6	677.2	59,59
40	269.9	197.6	197.3	256.9				30- 40	231.8	909.0	79.3,79.3
50	90.68	70.30	71.07	87.15				40- 50	108.0	1017	88.7,88.7
60	45.70	40.46	41.52	46.92				50- 60	51.43	1068	93.2,93.2
70	30.84	27.09	27.14	31.03				60- 70	35.67	1104	96.3,96.3
80	19.29	15.63	15.40	19.04				70- 80	24.49	1129	98.4,98.4
90	0.7255	0.1712	0.2120	0.1481				80- 90	8.264	1137	99.1,99.1
100	0.2065	0.2696	0.2430	0.1666				90-100	0.2463	1137	99.1,99.1
110	0.3884	0.4962	0.4376	0.2869				100-110	0.3096	1137	99.2,99.2
120	0.8061	1.034	0.9012	0.6469				110-120	0.5888	1138	99.2,99.2
130	1.608	1.976	1.768	1.367				120-130	1.099	1139	99.3,99.3
140	2.675	3.132	2.857	2.362				130-140	1.691	1141	99.5,99.5
150	3.795	4.280	3.931	3.481				140-150	2.077	1143	99.6,99.6
160	4.798	5.129	4.866	4.472				150-160	2.002	1145	99.8,99.8
170	5.576	5.807	5.637	5.360				160-170	1.469	1146	100,100
180	6.031	6.039	6.031	5.959				170-180	0.5531	1147	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

0 - 45 DEG Zonal Flux:975.07 %lum: 85.0%
 0 - 60 DEG Zonal Flux:1068.5 %lum: 93.2%
 All measured values may vary less than 35 %
 from the average measured value in the 0 to 130 deg. zone: 5.3%
 All measured values in the 0 to 130 deg. zone
 may vary less than 50% from the average value of itself: 8.2%

C Range: 0 - 360DEG	□ Range: 0 - 180DEG
C Interval: 90.0DEG	□ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.690m [K=1.0000]
Test Date:2022-07-04	Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.00V I:0.0556A P:12.269W PF:0.9595 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1146.94x1 lm		
NAME: DM13W-60DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

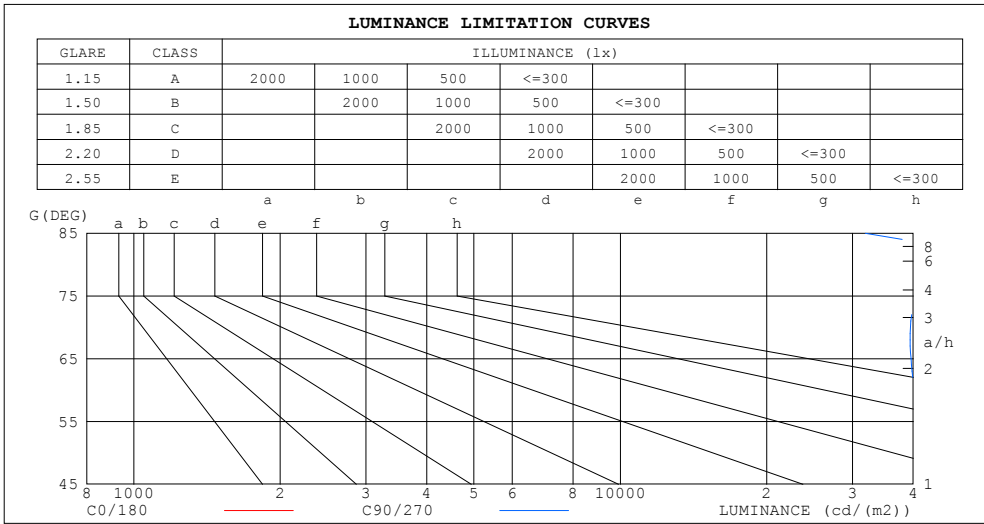

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	55823	31903
80	55716	44858
75	47943	41228
70	45219	39484
65	44702	39587
60	45846	40334
55	52286	44273
50	70755	54514
45	113389	80648


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-07-04

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.00V I:0.0556A P:12.269W PF:0.9595 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1146.94x1 lm		
NAME: DML3W-60DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.09	1.06	1.03	1.06	1.04	1.01	1.02	.90	.98	.98	.96	.95	.95	.93	.92	.90
2.0	.99	.95	.91	.98	.93	.89	.94	.90	.87	.91	.88	.85	.88	.86	.83	.82
3.0	.91	.86	.81	.90	.85	.80	.87	.82	.79	.84	.81	.77	.82	.79	.76	.74
4.0	.84	.78	.73	.83	.77	.73	.81	.76	.72	.79	.74	.71	.77	.73	.70	.68
5.0	.78	.72	.67	.77	.71	.66	.75	.70	.66	.73	.69	.65	.72	.68	.64	.63
6.0	.73	.66	.61	.72	.65	.61	.70	.65	.60	.69	.64	.60	.67	.63	.59	.58
7.0	.68	.61	.56	.67	.61	.56	.66	.60	.56	.64	.59	.55	.63	.59	.55	.54
8.0	.64	.57	.52	.63	.57	.52	.62	.56	.52	.61	.55	.52	.59	.55	.51	.50
9.0	.60	.53	.49	.59	.53	.49	.58	.52	.48	.57	.52	.48	.56	.51	.48	.46
10.0	.56	.50	.46	.56	.50	.45	.55	.49	.45	.54	.49	.45	.53	.48	.45	.43

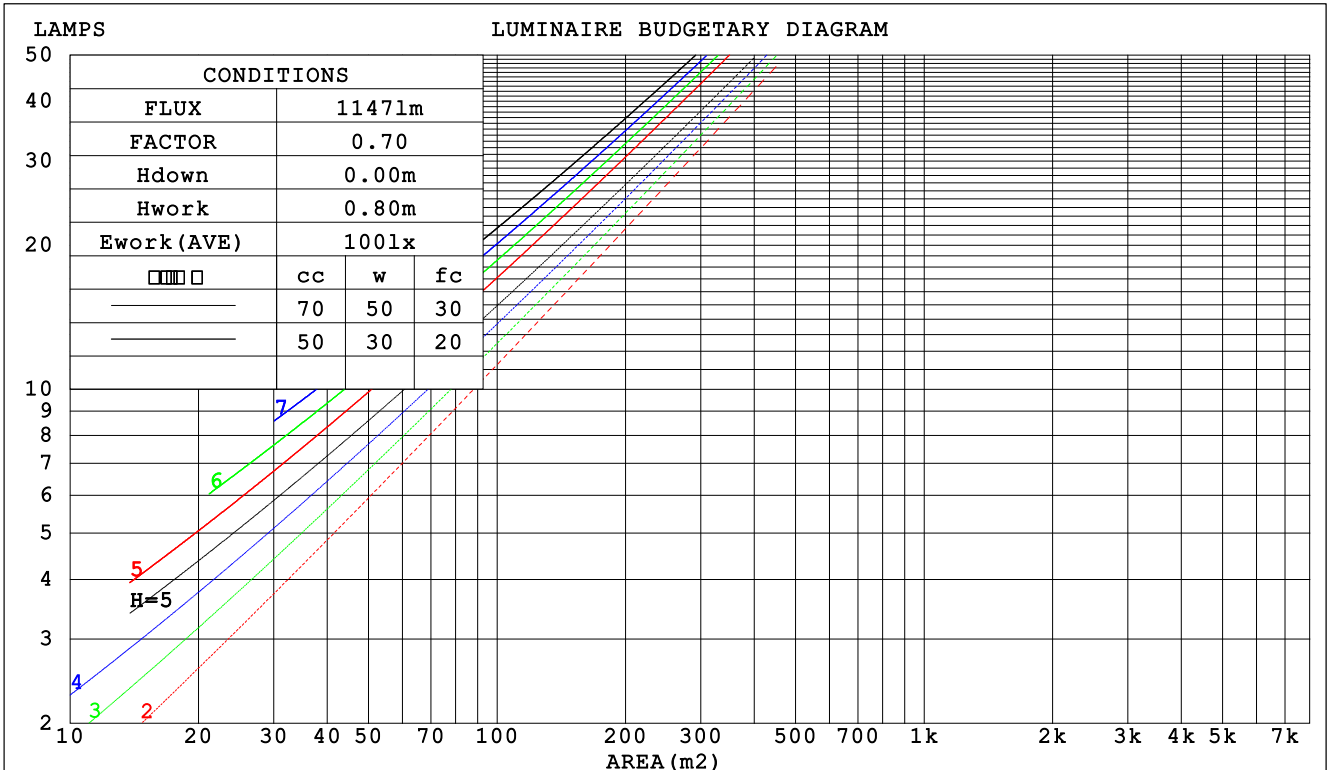

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-07-04

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:230.00V I:0.0556A P:12.269W PF:0.9595 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1146.94x1 lm		
NAME: DML3W-60DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.215 .122 .039	.208 .119 .038	.195 .112 .036	.183 .105 .034	.171 .099 .032	
2.0	.204 .112 .034	.198 .109 .034	.186 .104 .032	.176 .099 .031	.166 .094 .030	
3.0	.192 .102 .031	.186 .100 .030	.176 .096 .029	.167 .092 .028	.159 .088 .027	
4.0	.180 .094 .028	.176 .092 .027	.167 .089 .026	.159 .085 .026	.152 .082 .025	
5.0	.170 .087 .025	.166 .085 .025	.158 .082 .024	.151 .080 .024	.145 .077 .023	
6.0	.161 .080 .023	.157 .079 .023	.150 .077 .022	.144 .075 .022	.138 .073 .022	
7.0	.152 .075 .021	.149 .074 .021	.143 .072 .021	.137 .070 .020	.132 .069 .020	
8.0	.144 .071 .020	.142 .070 .020	.136 .068 .019	.131 .066 .019	.126 .065 .019	
9.0	.137 .066 .019	.135 .066 .018	.130 .064 .018	.125 .063 .018	.121 .062 .018	
10.0	.131 .063 .017	.129 .062 .017	.124 .061 .017	.120 .060 .017	.116 .059 .017	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.197 .197 .197	.168 .168 .168	.115 .115 .115	.066 .066 .066	.021 .021 .021	
1.0	.180 .164 .149	.154 .140 .128	.106 .097 .088	.061 .056 .051	.019 .018 .017	
2.0	.167 .139 .115	.143 .120 .100	.098 .083 .070	.057 .048 .041	.018 .016 .013	
3.0	.156 .121 .092	.134 .104 .080	.092 .072 .056	.053 .042 .033	.017 .014 .011	
4.0	.147 .106 .075	.126 .092 .066	.087 .064 .046	.050 .037 .027	.016 .012 .009	
5.0	.138 .095 .063	.119 .082 .055	.082 .057 .039	.047 .034 .023	.015 .011 .008	
6.0	.131 .086 .054	.113 .075 .047	.078 .052 .033	.045 .031 .020	.015 .010 .006	
7.0	.125 .079 .046	.107 .068 .041	.074 .048 .029	.043 .028 .017	.014 .009 .006	
8.0	.119 .073 .041	.102 .063 .036	.071 .044 .025	.041 .026 .015	.013 .009 .005	
9.0	.114 .068 .036	.098 .059 .032	.068 .041 .023	.039 .024 .013	.013 .008 .004	
10.0	.109 .063 .033	.094 .055 .029	.065 .039 .020	.038 .023 .012	.012 .007 .004	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-07-04

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.00V I:0.0556A P:12.269W PF:0.9595 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1146.94x1 lm		
NAME: DMI3W-60DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.2	26.3	25.4	26.5	26.7	24.2	25.3	24.5	25.5	25.7
3H	25.8	26.8	26.1	27.0	27.2	24.9	25.9	25.2	26.1	26.3
4H	26.2	27.1	26.5	27.4	27.6	25.3	26.2	25.6	26.5	26.7
6H	26.7	27.5	27.0	27.8	28.1	25.7	26.6	26.0	26.9	27.2
8H	26.9	27.8	27.2	28.0	28.3	25.9	26.8	26.2	27.0	27.3
12H	27.1	27.9	27.4	28.2	28.5	26.0	26.8	26.3	27.1	27.4
4H 2H	25.2	26.2	25.5	26.4	26.7	24.4	25.3	24.7	25.6	25.8
3H	26.1	26.9	26.4	27.2	27.5	25.3	26.1	25.6	26.4	26.7
4H	26.6	27.4	27.0	27.7	28.1	25.9	26.6	26.3	27.0	27.3
6H	27.3	28.0	27.7	28.4	28.7	26.5	27.2	26.9	27.5	27.9
8H	27.7	28.3	28.1	28.7	29.1	26.8	27.4	27.2	27.8	28.2
12H	27.9	28.5	28.4	28.9	29.3	26.9	27.5	27.4	27.9	28.3
8H 4H	26.8	27.5	27.3	27.8	28.2	26.1	26.8	26.6	27.1	27.5
6H	27.7	28.2	28.2	28.6	29.1	27.0	27.5	27.4	27.9	28.4
8H	28.2	28.6	28.7	29.1	29.5	27.4	27.8	27.8	28.3	28.7
12H	28.5	28.9	29.0	29.4	29.9	27.6	28.0	28.1	28.4	28.9
12H 4H	26.9	27.4	27.3	27.8	28.2	26.2	26.8	26.6	27.1	27.6
6H	27.8	28.2	28.3	28.7	29.1	27.1	27.5	27.6	28.0	28.4
8H	28.3	28.7	28.8	29.2	29.6	27.5	27.9	28.0	28.4	28.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.9 / - 0.9					+ 0.7 / - 0.8				
1.5H	+ 1.8 / - 0.8					+ 1.2 / - 0.8				
2.0H	+ 1.5 / - 0.4					+ 0.9 / - 0.5				

CIE Pub.117, 1147 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.5)
Area: 0.002 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-07-04

Range: 0 - 180DEG
 Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.00V I:0.0556A P:12.269W PF:0.9595 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1146.94x1 lm		
NAME: DM13W-60DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	79	71	66	78	71	66	77	70	66	62
0.80	87	80	75	86	79	75	85	78	74	70
1.00	93	85	81	92	85	81	90	85	80	75
1.25	97	91	86	96	90	86	94	89	85	80
1.50	101	95	90	99	94	90	97	92	89	83
2.00	105	99	95	103	98	94	100	96	93	87
2.50	107	102	98	105	101	97	102	98	95	88
3.00	109	105	101	107	103	100	103	100	98	90
4.00	111	108	105	109	106	103	105	103	101	93
5.00	113	110	107	111	108	106	106	104	103	94
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-07-04

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.00V I:0.0556A P:12.269W PF:0.9595 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1146.94x1 lm		
NAME: DM13W-60DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

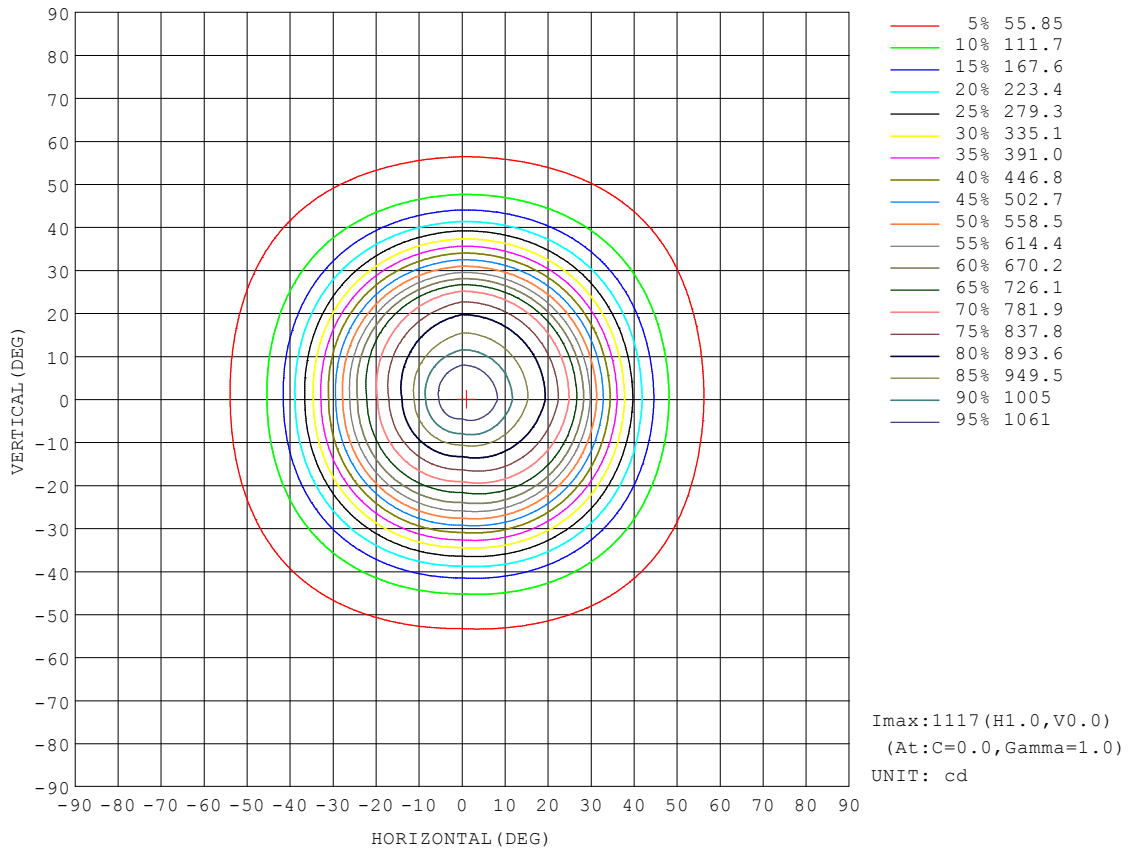


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-07-04

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

AAI Figure

Test:U:230.00V I:0.0556A P:12.269W PF:0.9595 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1146.94x1 lm		
NAME: DM13W-60DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

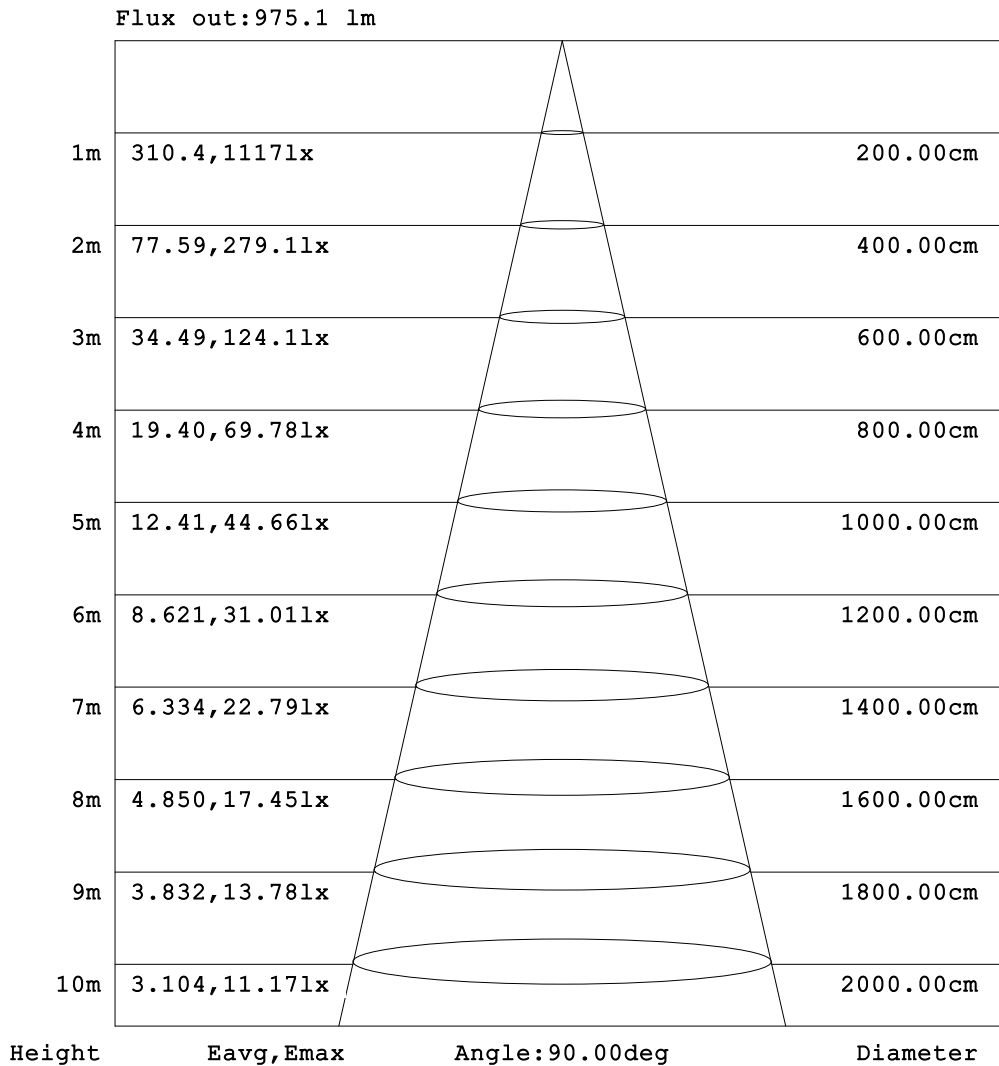


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-07-04

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:230.00V I:0.0556A P:12.269W PF:0.9595 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1146.94x1 lm		
NAME: DM13W-60DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

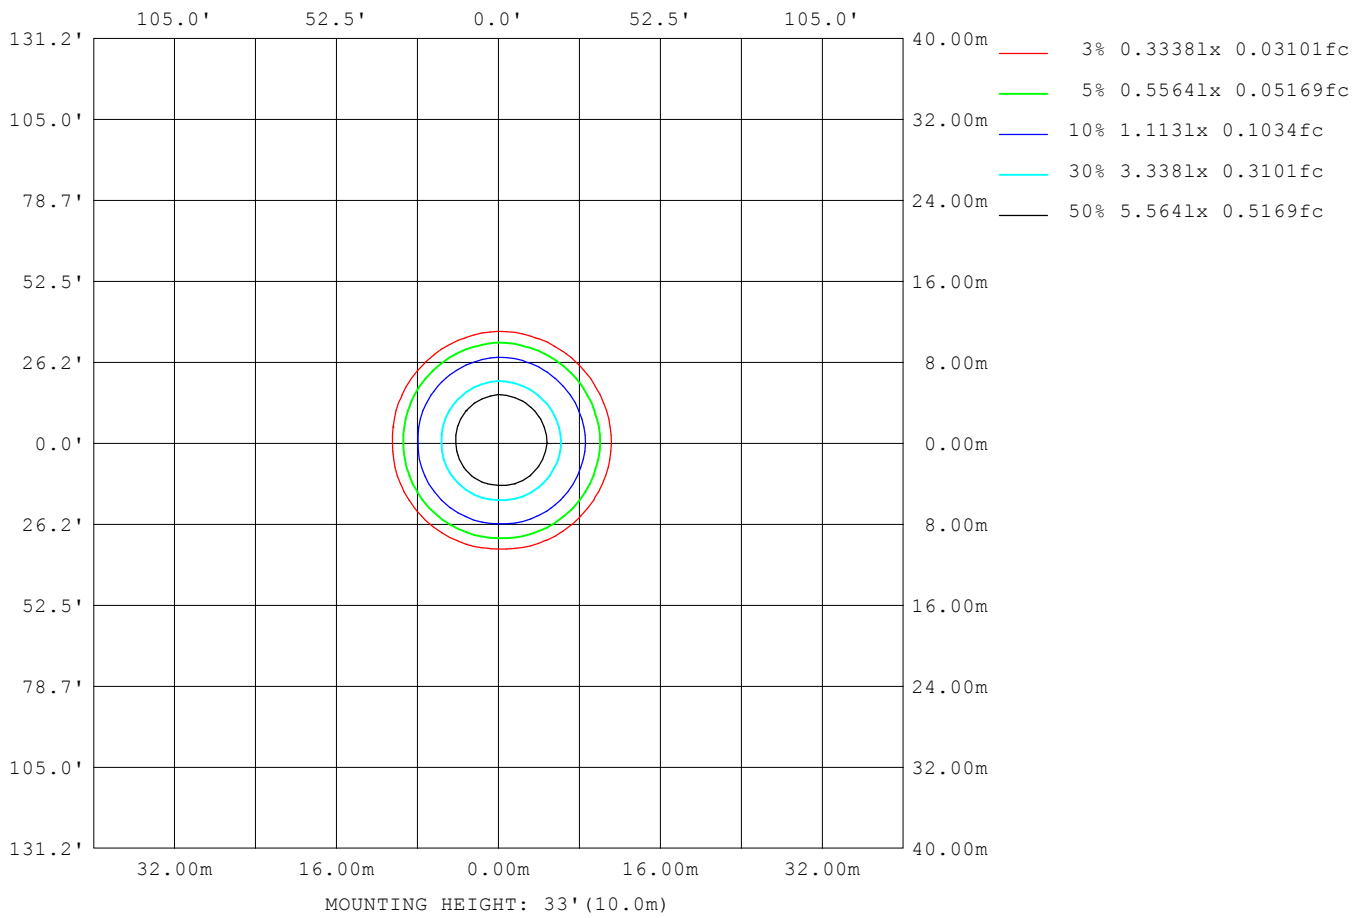

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-07-04

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:230.00V I:0.0556A P:12.269W PF:0.9595 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1146.94x1 lm		
NAME: DM13W-60DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	42371
L_0~180 (75) av	44791
L_0~180 (85) av	40816
L_90~270 (65) av	42604
L_90~270 (75) av	44734
L_90~270 (85) av	39499
L_45 (65) av	42380
L_45 (75) av	44568
L_45 (85) av	39070

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-07-04

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

Planar Illuminance Curve

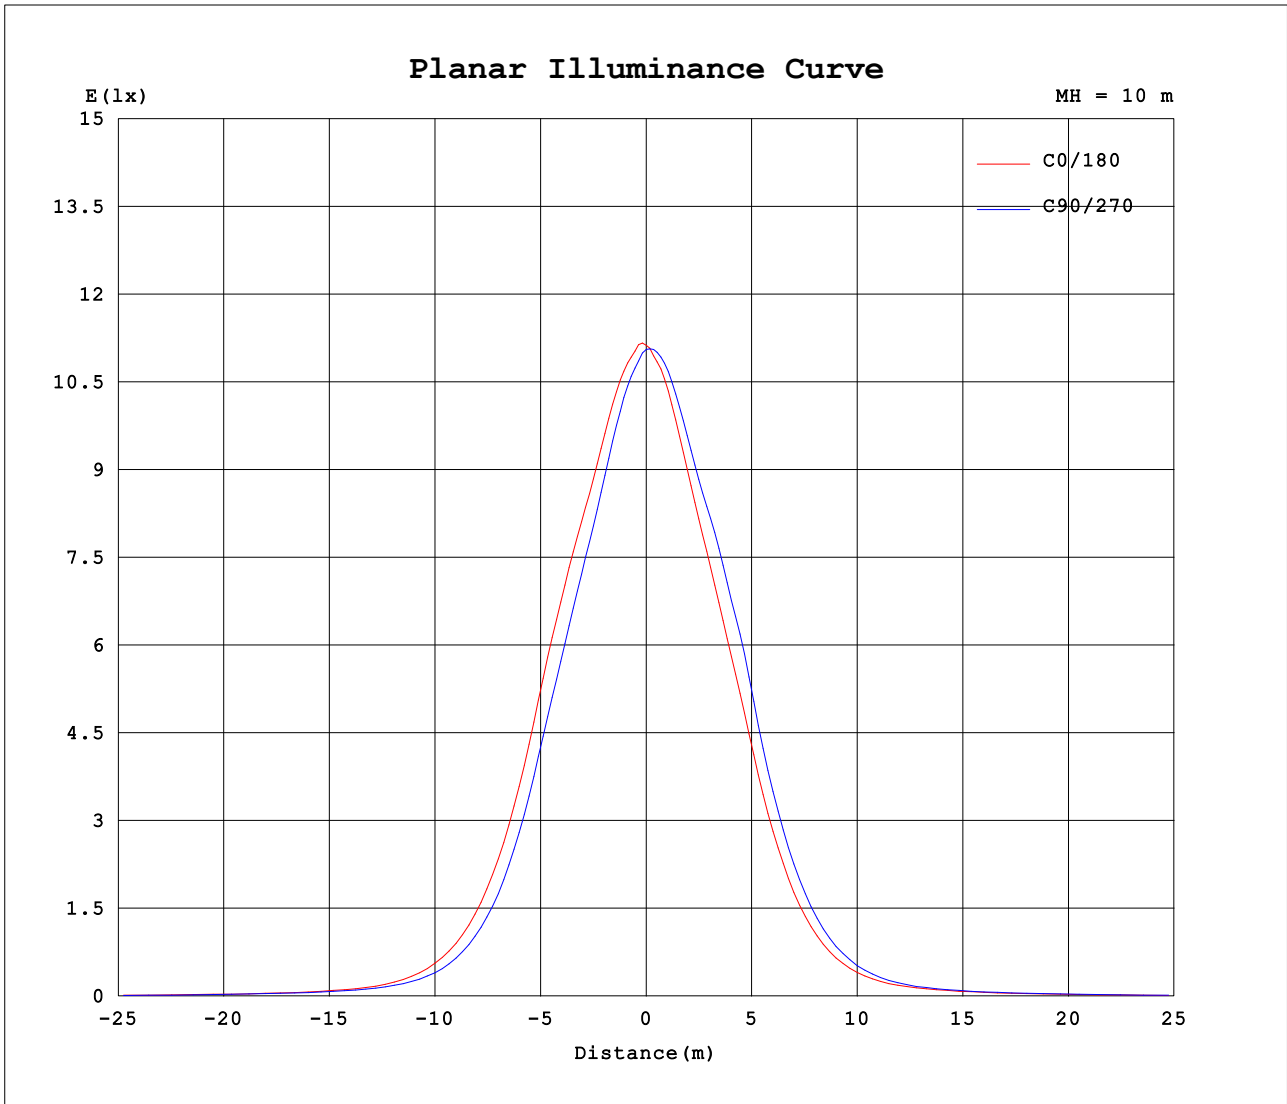

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-07-04

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 8.690m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.00V I:0.0556A P:12.269W PF:0.9595 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1146.94x1 lm		
NAME: DMI3W-60DEG 4000K	TYPE: 13W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.002	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	90	180	270															
0	1109	1109	1109	1109															
5	1092	1059	1064	1098															
10	1031	966	970	1033															
15	951	865	872	958															
20	880	766	771	891															
25	776	644	648	789															
30	606	480	480	596															
35	426	320	322	413															
40	270	198	197	257															
45	160	114	116	149															
50	90.7	70.3	71.1	87.2															
55	59.8	50.9	52.4	60.5															
60	45.7	40.5	41.5	46.9															
65	37.7	33.6	34.0	38.5															
70	30.8	27.1	27.1	31.0															
75	24.7	21.4	21.6	24.9															
80	19.3	15.6	15.4	19.0															
85	9.70	5.58	4.53	8.19															
90	0.73	0.17	0.21	0.15															
95	0.20	0.21	0.19	0.16															
100	0.21	0.27	0.24	0.17															
105	0.27	0.35	0.32	0.20															
110	0.39	0.50	0.44	0.29															
115	0.55	0.72	0.62	0.43															
120	0.81	1.03	0.90	0.65															
125	1.16	1.46	1.29	0.96															
130	1.61	1.98	1.77	1.37															
135	2.11	2.52	2.28	1.84															
140	2.67	3.13	2.86	2.36															
145	3.24	3.74	3.42	2.94															
150	3.80	4.28	3.93	3.48															
155	4.29	4.75	4.39	4.00															
160	4.80	5.13	4.87	4.47															
165	5.25	5.51	5.27	4.93															
170	5.58	5.81	5.64	5.36															
175	5.91	6.03	5.93	5.73															
180	6.03	6.04	6.03	5.96															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-07-04

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks: