
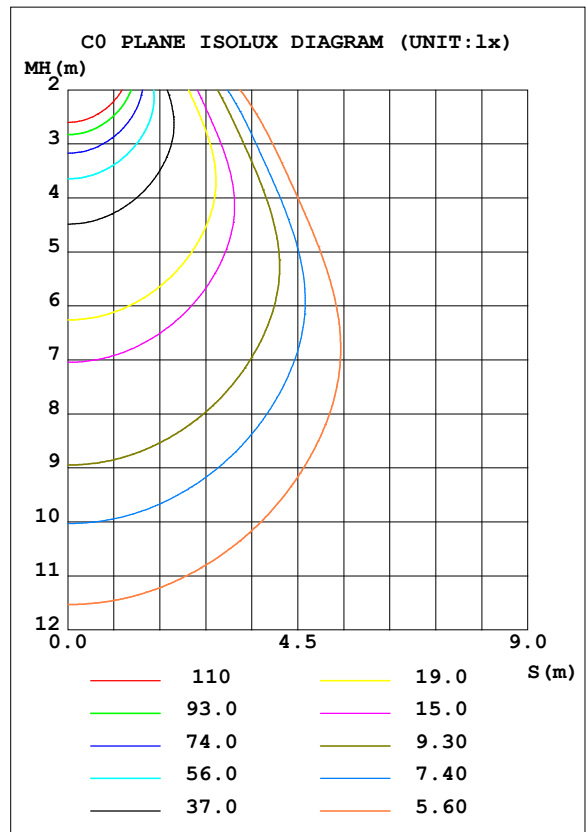


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.38V I:0.0672A P:15.622W PF:0.9667 Freq:50.00Hz Lamp Flux:1692.65x1 lm		
NAME: UGR19-30/60-CC	TYPE:16W	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.552*0.252	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 108.35 lm/W			
MODEL	UGR19-30/60-CC	Imax (cd)	744.5	S/MH (C0/180)	1.24
NOMINAL POWER (W)	30	LOR (%)	100.0	S/MH (C90/270)	1.26
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	1692.6	<input type="checkbox"/> UP, DN (C0-180)	0.0, 49.5
NOMINAL FLUX (lm)	1692.65	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 50.5
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	240	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.35

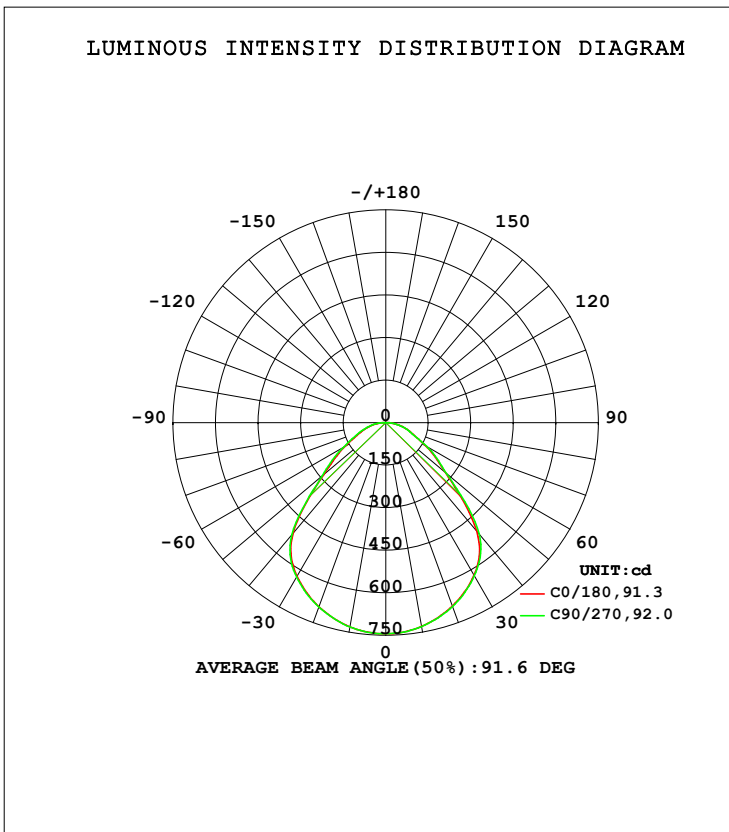

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity: 65.0%  
 Test Distance: 8.570m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum,lamp
10	729.5	729.8	729.9	729.3	731.1	730.6	731.8	731.7	0- 10	70.40	70.40	4.16,4.16
20	687.7	691.3	689.7	690.1	690.7	693.1	691.3	694.5	10- 20	201.3	271.7	16.1,16.1
30	622.4	627.2	624.3	624.2	625.7	629.7	629.2	632.4	20- 30	305.3	577.0	34.1,34.1
40	498.8	505.0	512.4	500.5	508.1	505.8	514.9	511.5	30- 40	359.1	936.1	55.3,55.3
50	277.3	332.1	280.9	326.9	286.1	338.1	293.9	344.1	40- 50	316.4	1253	74,74
60	160.9	185.2	166.3	181.3	165.1	189.7	171.6	194.2	50- 60	215.8	1468	86.7,86.7
70	88.82	91.99	87.73	91.00	90.32	94.63	95.33	96.21	60- 70	127.4	1596	94.3,94.3
80	42.40	46.60	39.87	44.58	43.96	50.65	47.59	52.52	70- 80	73.49	1669	98.6,98.6
90	0.6729	1.123	0.4025	0.7690	0.9732	1.190	0.5998	1.790	80- 90	23.39	1693	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:240.38V I:0.0672A P:15.622W PF:0.9667 Freq:50.00Hz Lamp Flux:1692.65x1 lm		
NAME: UGR19-30/60-CC	TYPE:16W	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.552*0.252	Shielding Angle:

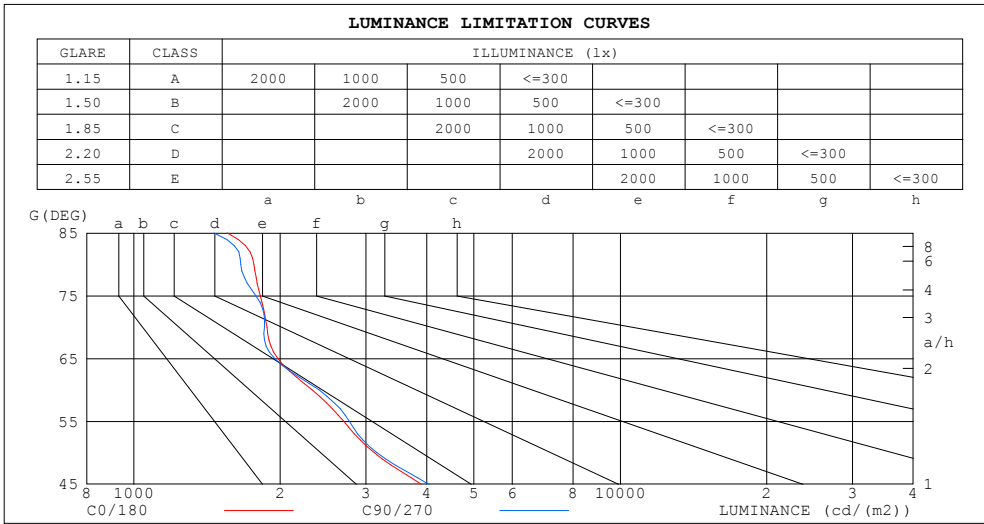

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1557	1462
80	1766	1660
75	1820	1783
70	1878	1855
65	1977	1948
60	2326	2405
55	2701	2775
50	3119	3160
45	3899	4037


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.38V I:0.0672A P:15.622W PF:0.9667 Freq:50.00Hz Lamp Flux:1692.65x1 lm		
NAME: UGR19-30/60-CC	TYPE:16W	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.552*0.252	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.99	1.04	1.00	.97	.99	.97	.94	.96	.93	.91	.92	.90	.88	.86
2.0	.94	.88	.83	.92	.86	.82	.89	.84	.80	.85	.81	.78	.82	.79	.76	.74
3.0	.84	.76	.70	.82	.75	.70	.79	.73	.69	.77	.72	.67	.74	.70	.66	.64
4.0	.75	.67	.61	.74	.66	.60	.71	.65	.60	.69	.63	.59	.67	.62	.58	.56
5.0	.68	.59	.53	.67	.59	.53	.65	.58	.52	.63	.57	.52	.61	.56	.51	.49
6.0	.61	.53	.47	.61	.53	.47	.59	.52	.47	.57	.51	.46	.56	.50	.46	.44
7.0	.56	.48	.42	.55	.47	.42	.54	.47	.42	.52	.46	.41	.51	.45	.41	.39
8.0	.51	.43	.38	.51	.43	.38	.49	.43	.38	.48	.42	.37	.47	.41	.37	.35
9.0	.47	.40	.34	.47	.39	.34	.46	.39	.34	.45	.38	.34	.44	.38	.34	.32
10.0	.44	.36	.31	.43	.36	.31	.42	.36	.31	.41	.35	.31	.41	.35	.31	.29

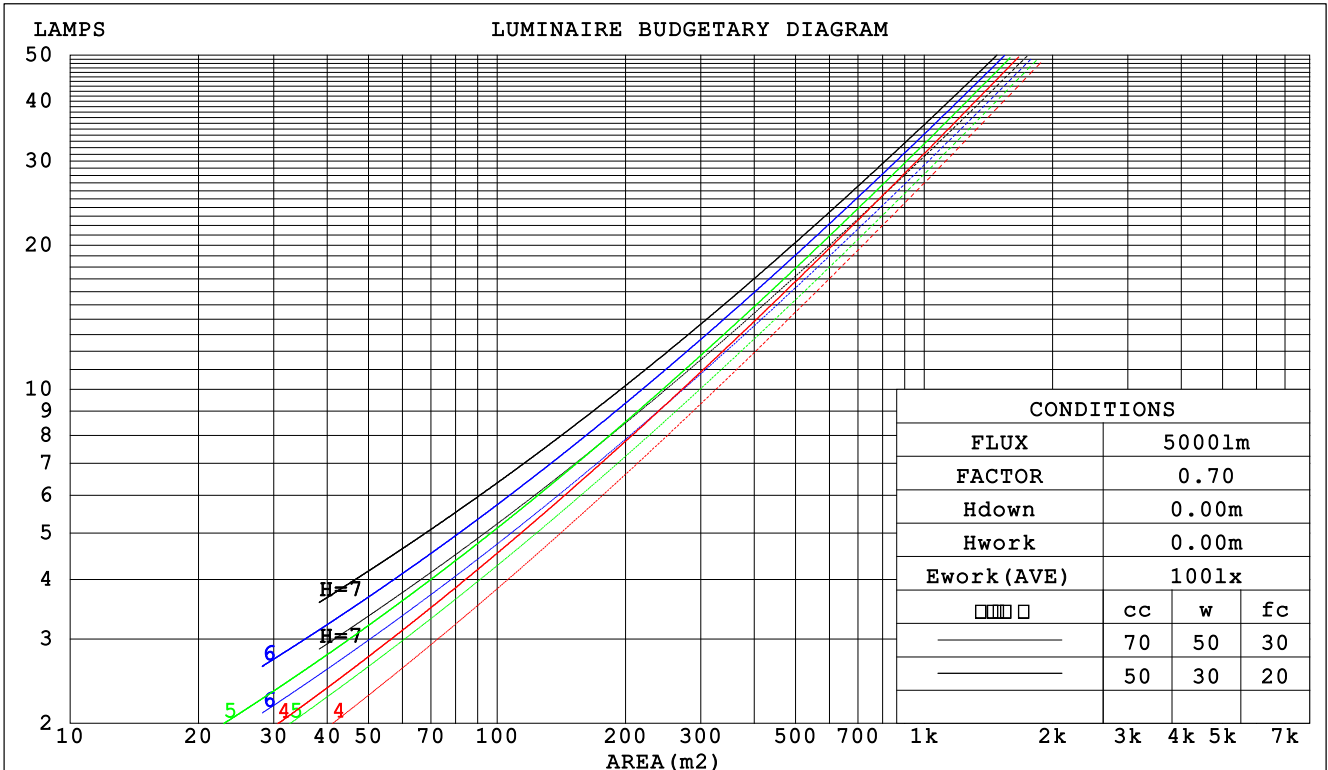

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:240.38V I:0.0672A P:15.622W PF:0.9667 Freq:50.00Hz Lamp Flux:1692.65x1 lm		
NAME: UGR19-30/60-CC	TYPE:16W	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.552*0.252	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.273 .155 .049	.266 .152 .048	.253 .145 .046	.241 .139 .045	.229 .133 .043	
2.0	.259 .142 .044	.253 .139 .043	.241 .134 .042	.231 .130 .041	.221 .125 .039	
3.0	.242 .129 .039	.237 .127 .038	.227 .123 .037	.218 .119 .037	.209 .116 .036	
4.0	.226 .118 .035	.221 .116 .034	.213 .113 .034	.204 .110 .033	.197 .107 .033	
5.0	.211 .108 .031	.207 .106 .031	.199 .104 .031	.192 .101 .030	.185 .099 .030	
6.0	.198 .099 .028	.194 .098 .028	.187 .096 .028	.180 .094 .028	.174 .092 .027	
7.0	.185 .092 .026	.182 .091 .026	.176 .089 .026	.170 .087 .025	.164 .085 .025	
8.0	.174 .085 .024	.171 .084 .024	.166 .083 .024	.160 .081 .023	.156 .080 .023	
9.0	.164 .079 .022	.162 .079 .022	.157 .077 .022	.152 .076 .022	.147 .075 .022	
10.0	.155 .074 .021	.153 .074 .021	.148 .073 .020	.144 .072 .020	.140 .070 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.178 .156 .137	.152 .134 .118	.104 .092 .082	.060 .053 .048	.019 .017 .015	
2.0	.168 .132 .102	.144 .114 .088	.099 .079 .061	.057 .046 .036	.018 .015 .012	
3.0	.159 .114 .078	.136 .098 .068	.094 .068 .048	.054 .040 .028	.017 .013 .009	
4.0	.151 .100 .062	.130 .087 .054	.089 .061 .038	.052 .035 .022	.017 .012 .007	
5.0	.144 .090 .050	.123 .078 .044	.085 .054 .031	.049 .032 .018	.016 .010 .006	
6.0	.137 .081 .041	.118 .070 .036	.081 .049 .026	.047 .029 .015	.015 .009 .005	
7.0	.130 .074 .035	.112 .064 .031	.077 .045 .022	.045 .027 .013	.015 .009 .004	
8.0	.124 .068 .030	.107 .059 .026	.074 .042 .019	.043 .025 .011	.014 .008 .004	
9.0	.119 .064 .026	.102 .055 .023	.071 .039 .016	.041 .023 .010	.013 .008 .003	
10.0	.113 .059 .023	.098 .051 .020	.068 .036 .014	.039 .021 .009	.013 .007 .003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:240.38V I:0.0672A P:15.622W PF:0.9667 Freq:50.00Hz Lamp Flux:1692.65x1 lm										
NAME: UGR19-30/60-CC					TYPE:16W			WEIGHT:		
SPEC.:5000K					DIM.:			SERIAL No.:1		
MFR.:					SUR.:0.552*0.252			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.0	17.4	16.3	17.6	17.8	16.1	17.5	16.4	17.7	17.9
3H	16.8	18.1	17.1	18.3	18.5	16.8	18.1	17.1	18.3	18.6
4H	17.2	18.4	17.5	18.6	18.9	17.2	18.4	17.5	18.7	18.9
6H	17.5	18.6	17.8	18.9	19.2	17.5	18.6	17.8	18.9	19.2
8H	17.6	18.7	18.0	19.0	19.3	17.6	18.7	17.9	19.0	19.3
12H	17.7	18.7	18.0	19.0	19.3	17.7	18.7	18.0	19.0	19.3
4H 2H	16.4	17.6	16.7	17.8	18.1	16.4	17.6	16.7	17.9	18.1
3H	17.3	18.4	17.7	18.7	19.0	17.4	18.4	17.7	18.7	19.0
4H	17.9	18.8	18.2	19.1	19.5	17.9	18.8	18.2	19.2	19.5
6H	18.3	19.2	18.7	19.5	19.9	18.3	19.2	18.7	19.5	19.9
8H	18.5	19.3	18.9	19.7	20.1	18.5	19.3	18.9	19.6	20.0
12H	18.6	19.4	19.1	19.7	20.1	18.6	19.3	19.0	19.7	20.1
8H 4H	18.1	18.9	18.5	19.2	19.6	18.1	18.9	18.5	19.2	19.6
6H	18.7	19.4	19.1	19.8	20.2	18.7	19.4	19.1	19.8	20.2
8H	19.0	19.6	19.4	20.0	20.4	19.0	19.5	19.4	20.0	20.4
12H	19.2	19.7	19.7	20.1	20.6	19.1	19.6	19.6	20.1	20.6
12H 4H	18.1	18.8	18.5	19.2	19.6	18.1	18.8	18.5	19.2	19.6
6H	18.8	19.3	19.2	19.8	20.2	18.8	19.3	19.2	19.8	20.2
8H	19.1	19.6	19.6	20.0	20.5	19.1	19.6	19.5	20.0	20.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.4 / - 0.5					+ 0.4 / - 0.5				
1.5H	+ 0.2 / - 0.5					+ 0.2 / - 0.5				
2.0H	+ 0.7 / - 0.8					+ 0.7 / - 0.7				

CIE Pub.117, 1693 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.8)

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:240.38V I:0.0672A P:15.622W PF:0.9667 Freq:50.00Hz Lamp Flux:1692.65x1 lm		
NAME: UGR19-30/60-CC	TYPE:16W	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.552*0.252	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	64	53	47	63	53	47	62	52	47	41
0.80	74	63	57	73	63	57	71	62	56	50
1.00	82	72	66	81	71	65	78	72	65	58
1.25	88	79	73	87	78	73	84	77	72	65
1.50	93	84	78	91	83	78	88	82	77	70
2.00	99	91	86	97	90	85	94	88	84	76
2.50	102	95	90	100	94	89	96	91	87	80
3.00	105	99	94	103	97	93	99	95	91	83
4.00	108	103	99	106	102	98	102	98	95	87
5.00	110	106	102	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:240.38V I:0.0672A P:15.622W PF:0.9667 Freq:50.00Hz Lamp Flux:1692.65x1 lm		
NAME: UGR19-30/60-CC	TYPE:16W	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.552*0.252	Shielding Angle:

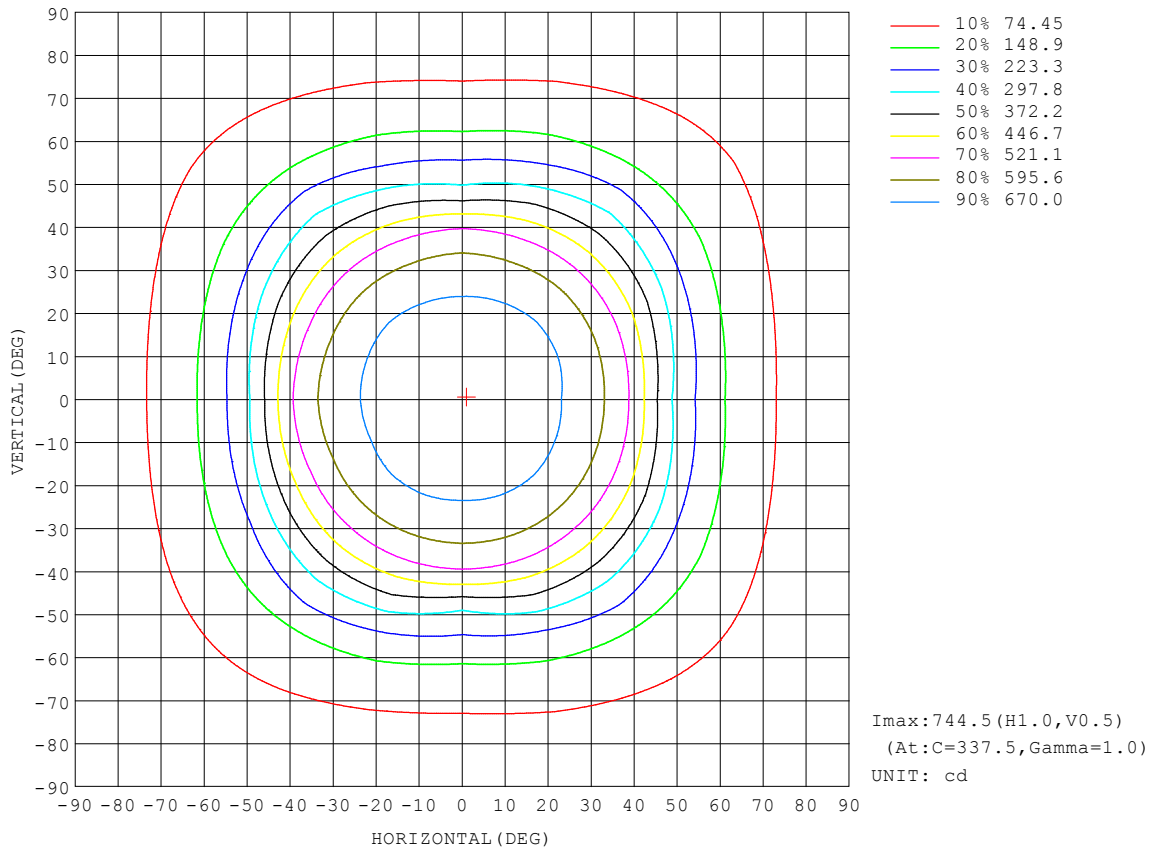


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity: 65.0%  
 Test Distance: 8.570m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:240.38V I:0.0672A P:15.622W PF:0.9667 Freq:50.00Hz Lamp Flux:1692.65x1 lm		
NAME: UGR19-30/60-CC	TYPE:16W	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.552*0.252	Shielding Angle:

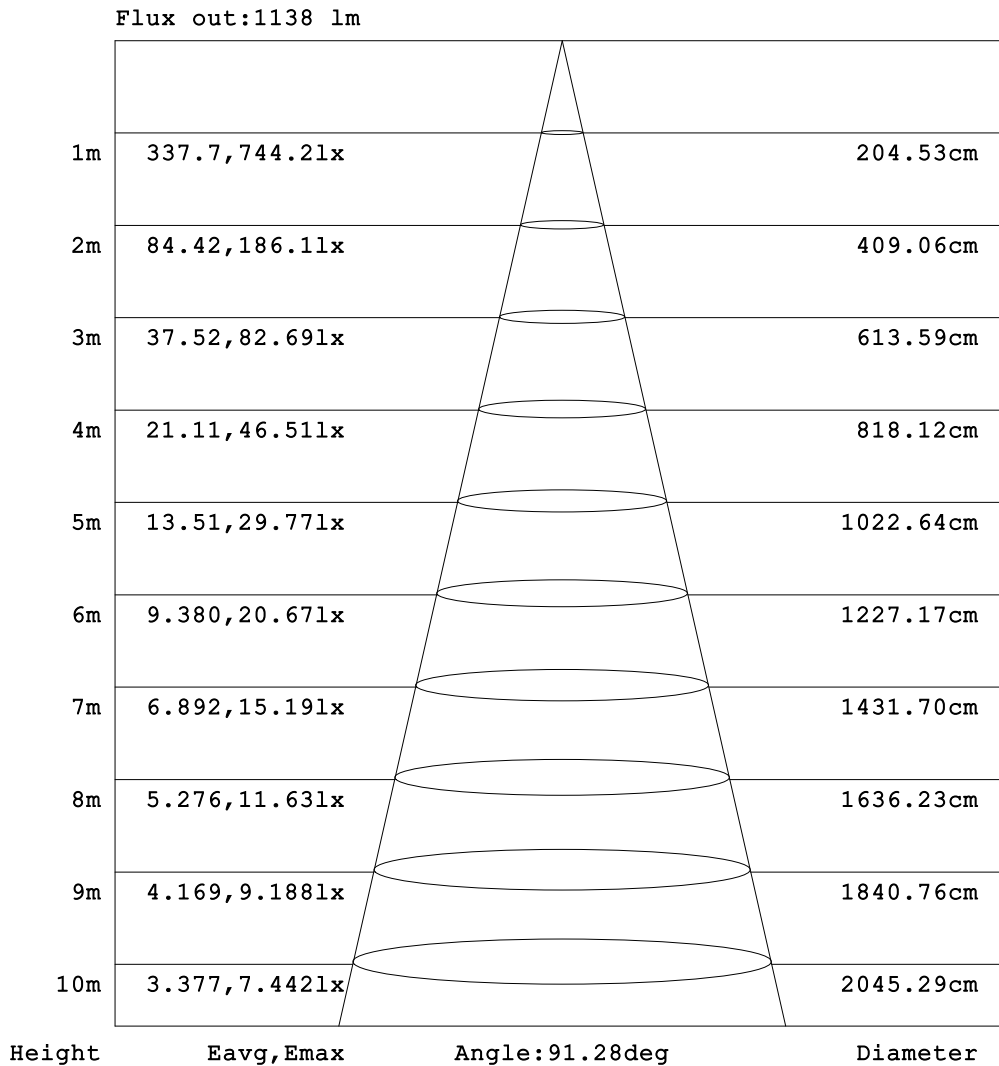


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:240.38V I:0.0672A P:15.622W PF:0.9667 Freq:50.00Hz Lamp Flux:1692.65x1 lm		
NAME: UGR19-30/60-CC	TYPE:16W	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.552*0.252	Shielding Angle:

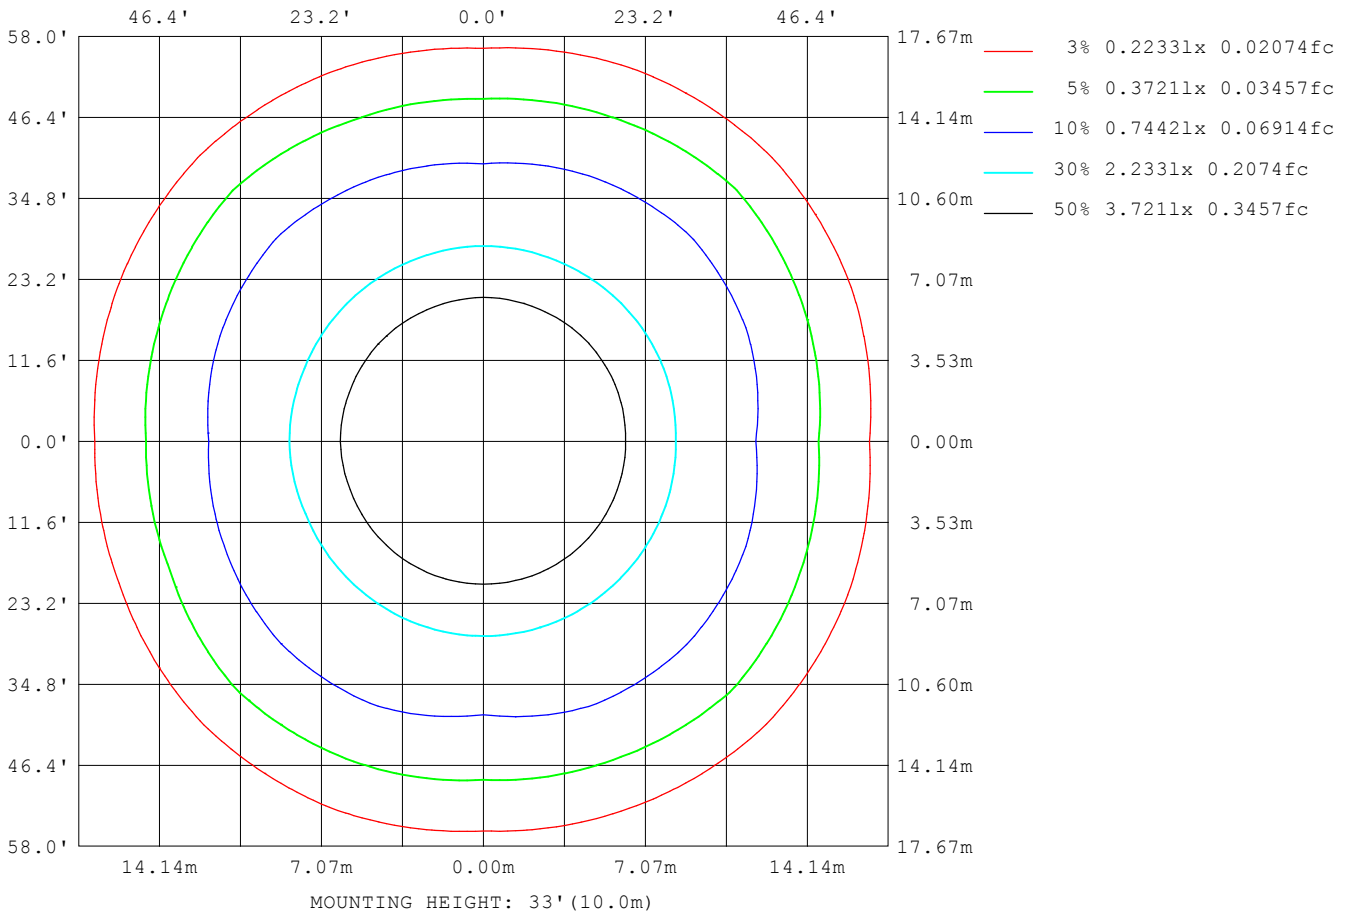

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:240.38V I:0.0672A P:15.622W PF:0.9667 Freq:50.00Hz Lamp Flux:1692.65x1 lm		
NAME: UGR19-30/60-CC	TYPE:16W	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.552*0.252	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2004
L_0~180 (75) av	1841
L_0~180 (85) av	1624
L_90~270 (65) av	2049
L_90~270 (75) av	1861
L_90~270 (85) av	1674
L_45 (65) av	2167
L_45 (75) av	1981
L_45 (85) av	1848

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

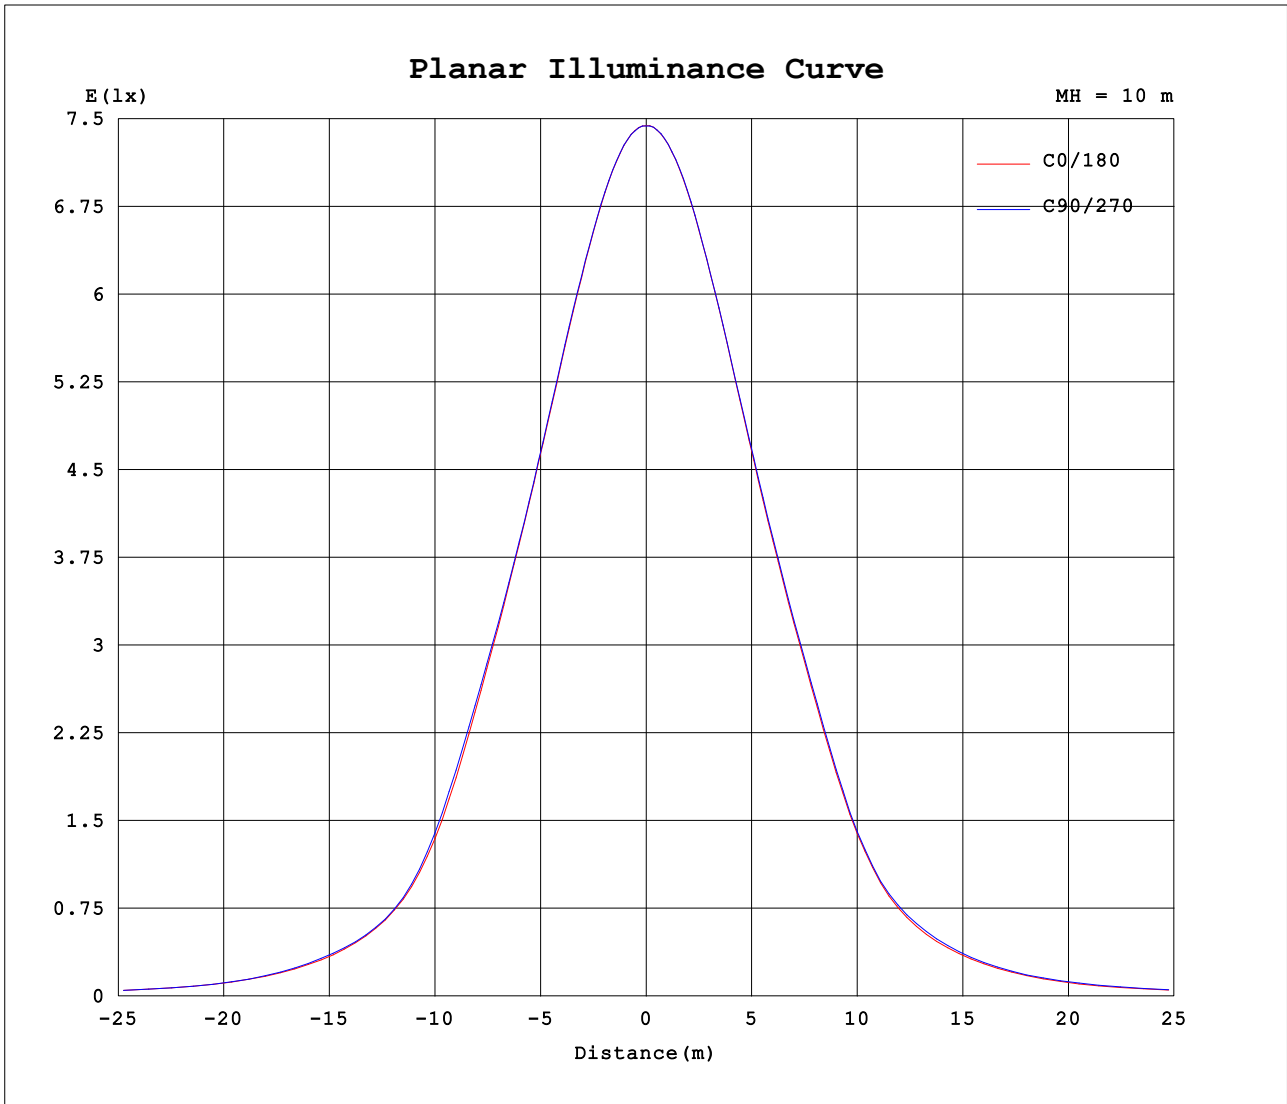

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity: 65.0%  
 Test Distance: 8.570m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.38V I:0.0672A P:15.622W PF:0.9667 Freq:50.00Hz Lamp Flux:1692.65x1 lm		
NAME: UGR19-30/60-CC	TYPE:16W	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.552*0.252	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	744	744	744	744	744	744	744	744	744	744	744	744	744	744	744	744			
5	741	741	741	741	741	741	740	740	741	741	741	741	742	742	742	742			
10	729	730	730	731	730	730	729	729	731	730	731	731	732	731	732	731			
15	712	713	713	713	712	713	712	711	714	713	714	713	714	714	715	715			
20	688	690	691	691	690	691	690	688	691	692	693	692	691	693	695	693			
25	658	661	664	663	660	662	662	658	661	663	667	664	664	665	669	665			
30	622	624	627	627	624	625	624	620	626	626	630	627	629	629	632	629			
35	575	575	576	579	581	577	573	570	581	576	578	579	585	581	582	580			
40	499	503	505	510	512	508	500	496	508	503	506	508	515	511	512	510			
45	381	410	421	420	395	419	416	401	394	414	421	417	398	423	428	421			
50	277	317	332	329	281	327	327	305	286	320	338	321	294	328	344	327			
55	214	233	255	237	220	240	252	224	219	239	265	241	230	246	270	243			
60	161	176	185	176	166	179	181	170	165	179	190	183	172	187	194	182			
65	116	128	124	126	114	124	122	124	119	128	129	133	126	133	131	131			
70	88.8	92.0	92.0	89.9	87.7	88.5	91.0	90.1	90.3	93.6	94.6	97.7	95.3	97.6	96.2	96.8			
75	65.1	68.7	68.8	69.5	63.8	68.0	67.5	66.0	66.7	72.4	72.9	73.5	69.4	74.8	74.4	74.8			
80	42.4	44.3	46.6	44.4	39.9	44.0	44.6	41.7	44.0	48.8	50.7	49.7	47.6	51.5	52.5	50.8			
85	18.8	19.3	20.6	18.7	17.6	17.8	18.8	17.0	20.4	21.8	24.1	22.7	22.7	23.9	25.6	23.6			
90	0.67	0.89	1.12	0.61	0.40	0.54	0.77	0.62	0.97	1.06	1.19	0.99	0.60	1.14	1.79	1.82			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks: