
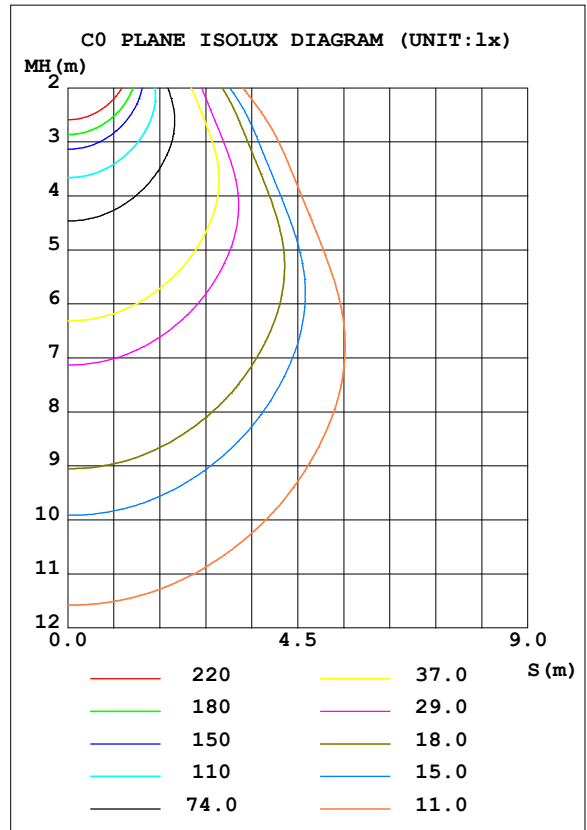


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.21V I:0.1261A P:29.478W PF:0.9731 Freq:50.00Hz Lamp Flux:3391.67x1 lm		
NAME: UGR19-60SQ-CC	TYPE:30W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.553*0.553	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 115.06 lm/W			
MODEL	UGR19-60SQ-CC	Imax (cd)	1476	S/MH (C0/180)	1.25
NOMINAL POWER (W)	30	LOR (%)	100.0	S/MH (C90/270)	1.26
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	3391.7	<input type="checkbox"/> UP, DN (C0-180)	0.0, 49.4
NOMINAL FLUX (lm)	3391.67	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 50.6
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	240	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.35

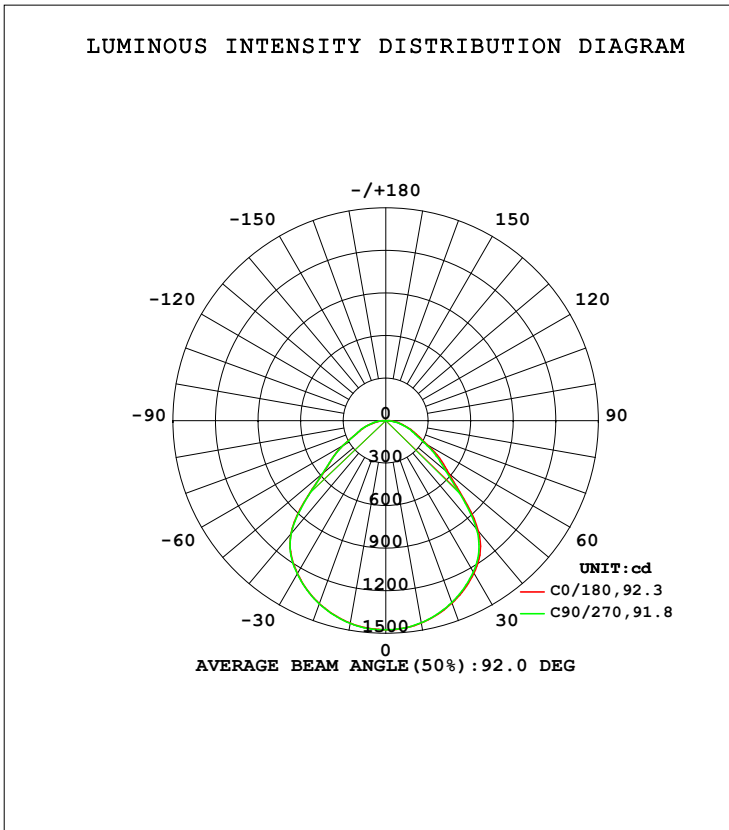

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity: 65.0%  
 Test Distance: 8.570m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1448	1448	1446	1445	1450	1449	1452	1452	0- 10	139.6	139.6	4.12,4.12
20	1368	1373	1364	1368	1373	1376	1375	1381	10- 20	399.7	539.3	15.9,15.9
30	1244	1245	1234	1240	1245	1253	1248	1261	20- 30	606.6	1146	33.8,33.8
40	1017	1006	995.8	999.3	1039	1028	1036	1034	30- 40	716.8	1863	54.9,54.9
50	581.3	669.8	555.3	652.4	579.3	681.8	583.2	689.7	40- 50	638.5	2501	73.7,73.7
60	335.3	372.0	318.3	363.0	347.7	392.2	341.9	402.9	50- 60	438.9	2940	86.7,86.7
70	190.1	184.5	178.0	181.4	182.6	191.3	187.3	194.9	60- 70	257.1	3197	94.3,94.3
80	90.20	98.40	83.25	90.04	81.83	97.75	88.48	104.9	70- 80	147.2	3344	98.6,98.6
90	1.813	2.486	1.150	0.8449	1.155	1.869	2.088	3.904	80- 90	47.48	3392	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:240.21V I:0.1261A P:29.478W PF:0.9731 Freq:50.00Hz Lamp Flux:3391.67x1 lm		
NAME: UGR19-60SQ-CC	TYPE:30W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.553*0.553	Shielding Angle:

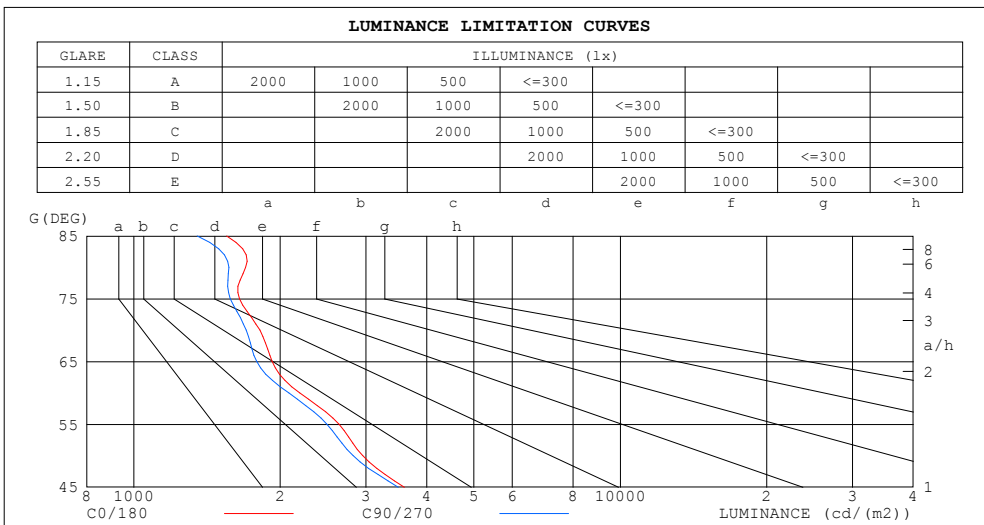

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1552	1350
80	1699	1568
75	1648	1579
70	1817	1702
65	1924	1789
60	2193	2082
55	2642	2496
50	2957	2825
45	3599	3499


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.21V I:0.1261A P:29.478W PF:0.9731 Freq:50.00Hz Lamp Flux:3391.67x1 lm		
NAME: UGR19-60SQ-CC	TYPE:30W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.553*0.553	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.06	1.02	.99	1.04	1.00	.97	.99	.96	.94	.95	.93	.91	.92	.90	.88	.86
2.0	.94	.88	.83	.92	.86	.82	.88	.84	.80	.85	.81	.78	.82	.79	.76	.74
3.0	.84	.76	.70	.82	.75	.70	.79	.73	.68	.76	.71	.67	.74	.70	.66	.64
4.0	.75	.67	.61	.74	.66	.60	.71	.65	.60	.69	.63	.59	.67	.62	.58	.56
5.0	.68	.59	.53	.66	.59	.53	.64	.58	.52	.63	.56	.52	.61	.55	.51	.49
6.0	.61	.53	.47	.60	.53	.47	.59	.52	.46	.57	.51	.46	.55	.50	.46	.44
7.0	.56	.48	.42	.55	.47	.42	.54	.47	.41	.52	.46	.41	.51	.45	.41	.39
8.0	.51	.43	.38	.51	.43	.38	.49	.42	.37	.48	.42	.37	.47	.41	.37	.35
9.0	.47	.39	.34	.47	.39	.34	.46	.39	.34	.44	.38	.34	.43	.38	.34	.32
10.0	.44	.36	.31	.43	.36	.31	.42	.36	.31	.41	.35	.31	.40	.35	.31	.29

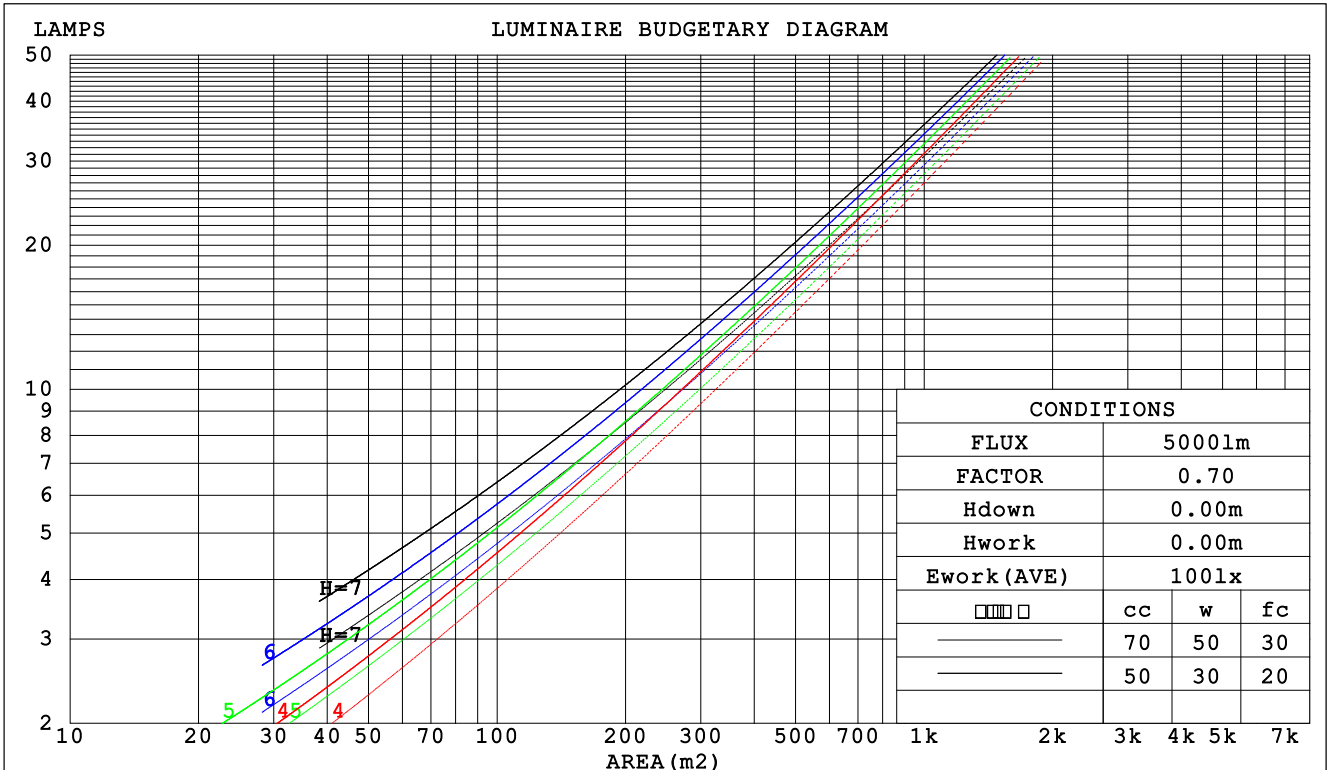

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:240.21V I:0.1261A P:29.478W PF:0.9731 Freq:50.00Hz Lamp Flux:3391.67x1 lm		
NAME: UGR19-60SQ-CC	TYPE:30W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.553*0.553	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.273	.155	.049	.266	.152	.048	.253	.145	.046	.241	.139	.045	.230	.133	.043	
2.0	.260	.142	.044	.254	.140	.043	.242	.135	.042	.232	.130	.041	.222	.125	.040	
3.0	.243	.129	.039	.238	.127	.038	.228	.123	.037	.218	.120	.037	.210	.116	.036	
4.0	.227	.118	.035	.222	.116	.034	.213	.113	.034	.205	.110	.033	.197	.107	.033	
5.0	.212	.108	.031	.208	.107	.031	.200	.104	.031	.192	.102	.030	.186	.099	.030	
6.0	.198	.099	.028	.194	.098	.028	.187	.096	.028	.181	.094	.028	.175	.092	.027	
7.0	.186	.092	.026	.182	.091	.026	.176	.089	.026	.170	.087	.025	.165	.086	.025	
8.0	.175	.085	.024	.172	.085	.024	.166	.083	.024	.161	.081	.024	.156	.080	.023	
9.0	.165	.080	.022	.162	.079	.022	.157	.078	.022	.152	.076	.022	.148	.075	.022	
10.0	.156	.075	.021	.153	.074	.021	.149	.073	.021	.144	.072	.020	.140	.071	.020	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.178	.156	.137	.152	.134	.118	.104	.092	.082	.060	.053	.048	.019	.017	.015	
2.0	.168	.132	.102	.144	.114	.088	.099	.079	.061	.057	.046	.036	.018	.015	.012	
3.0	.159	.114	.078	.137	.098	.068	.094	.068	.048	.054	.040	.028	.017	.013	.009	
4.0	.151	.100	.062	.130	.087	.054	.089	.061	.038	.052	.035	.022	.017	.012	.007	
5.0	.144	.090	.050	.124	.078	.043	.085	.054	.031	.049	.032	.018	.016	.010	.006	
6.0	.137	.081	.041	.118	.070	.036	.081	.049	.025	.047	.029	.015	.015	.009	.005	
7.0	.130	.074	.035	.112	.064	.030	.078	.045	.022	.045	.027	.013	.015	.009	.004	
8.0	.124	.068	.030	.107	.059	.026	.074	.042	.019	.043	.025	.011	.014	.008	.004	
9.0	.119	.064	.026	.102	.055	.023	.071	.039	.016	.041	.023	.010	.013	.008	.003	
10.0	.113	.059	.023	.098	.051	.020	.068	.036	.014	.040	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:240.21V I:0.1261A P:29.478W PF:0.9731 Freq:50.00Hz Lamp Flux:3391.67x1 lm										
NAME: UGR19-60SQ-CC					TYPE:30W			WEIGHT:		
SPEC.:4000K					DIM.:			SERIAL No.:1		
MFR.:					SUR.:0.553*0.553			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.9	17.3	16.2	17.5	17.7	15.7	17.1	16.0	17.3	17.5
3H	16.7	18.0	17.0	18.2	18.4	16.5	17.8	16.8	18.0	18.2
4H	17.1	18.3	17.4	18.5	18.8	16.8	18.1	17.1	18.3	18.6
6H	17.4	18.6	17.7	18.8	19.1	17.2	18.3	17.5	18.6	18.8
8H	17.6	18.7	17.9	18.9	19.2	17.3	18.4	17.6	18.7	18.9
12H	17.6	18.7	18.0	19.0	19.3	17.3	18.4	17.7	18.7	19.0
4H 2H	16.2	17.4	16.5	17.7	17.9	16.0	17.3	16.4	17.5	17.8
3H	17.2	18.3	17.6	18.6	18.9	17.0	18.1	17.4	18.4	18.7
4H	17.8	18.7	18.1	19.1	19.4	17.6	18.5	17.9	18.8	19.2
6H	18.3	19.1	18.7	19.5	19.8	18.0	18.9	18.4	19.2	19.6
8H	18.5	19.3	18.9	19.6	20.0	18.2	19.0	18.6	19.4	19.8
12H	18.6	19.3	19.0	19.7	20.1	18.3	19.1	18.8	19.4	19.8
8H 4H	18.0	18.8	18.4	19.1	19.5	17.8	18.6	18.2	19.0	19.3
6H	18.7	19.3	19.1	19.7	20.1	18.5	19.1	18.9	19.5	19.9
8H	19.0	19.6	19.4	20.0	20.4	18.7	19.3	19.2	19.7	20.2
12H	19.2	19.7	19.7	20.1	20.6	18.9	19.4	19.4	19.9	20.3
12H 4H	18.0	18.7	18.4	19.1	19.5	17.8	18.5	18.2	18.9	19.3
6H	18.7	19.3	19.2	19.7	20.2	18.5	19.1	19.0	19.5	20.0
8H	19.1	19.6	19.6	20.0	20.5	18.9	19.4	19.3	19.8	20.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.5				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.5				
2.0H	+ 0.6 / - 0.8					+ 0.7 / - 0.8				

CIE Pub.117, 3392 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.2)

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:240.21V I:0.1261A P:29.478W PF:0.9731 Freq:50.00Hz Lamp Flux:3391.67x1 lm		
NAME: UGR19-60SQ-CC	TYPE:30W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.553*0.553	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	63	53	46	63	53	46	62	52	46	40
0.80	73	63	56	72	63	56	71	62	56	50
1.00	82	72	65	80	71	65	78	72	64	58
1.25	88	79	73	87	78	72	84	77	72	65
1.50	93	84	78	91	83	78	88	82	76	70
2.00	99	91	86	97	90	85	94	88	83	76
2.50	102	95	90	100	94	89	96	91	87	80
3.00	105	99	94	103	97	93	99	94	91	83
4.00	108	103	99	106	101	98	102	98	95	87
5.00	110	106	102	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:240.21V I:0.1261A P:29.478W PF:0.9731 Freq:50.00Hz Lamp Flux:3391.67x1 lm		
NAME: UGR19-60SQ-CC	TYPE:30W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.553*0.553	Shielding Angle:

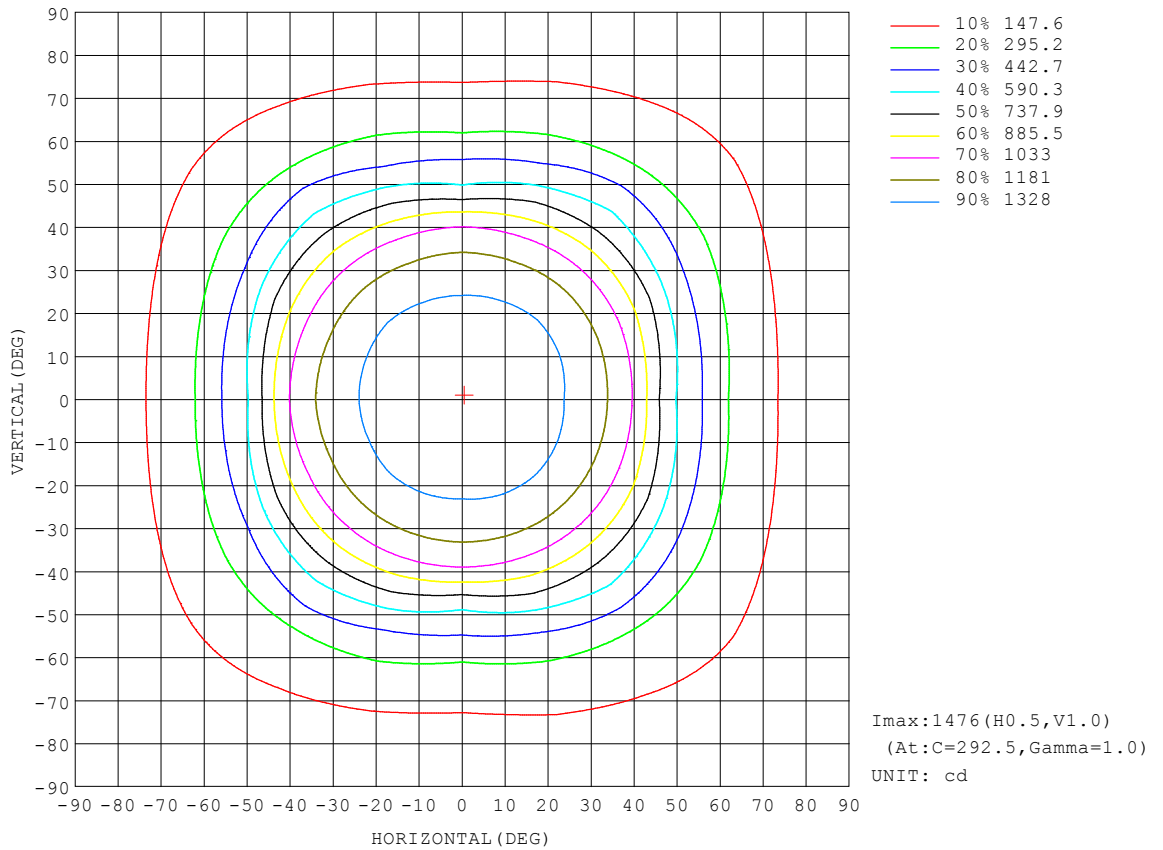


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:240.21V I:0.1261A P:29.478W PF:0.9731 Freq:50.00Hz Lamp Flux:3391.67x1 lm		
NAME: UGR19-60SQ-CC	TYPE:30W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.553*0.553	Shielding Angle:

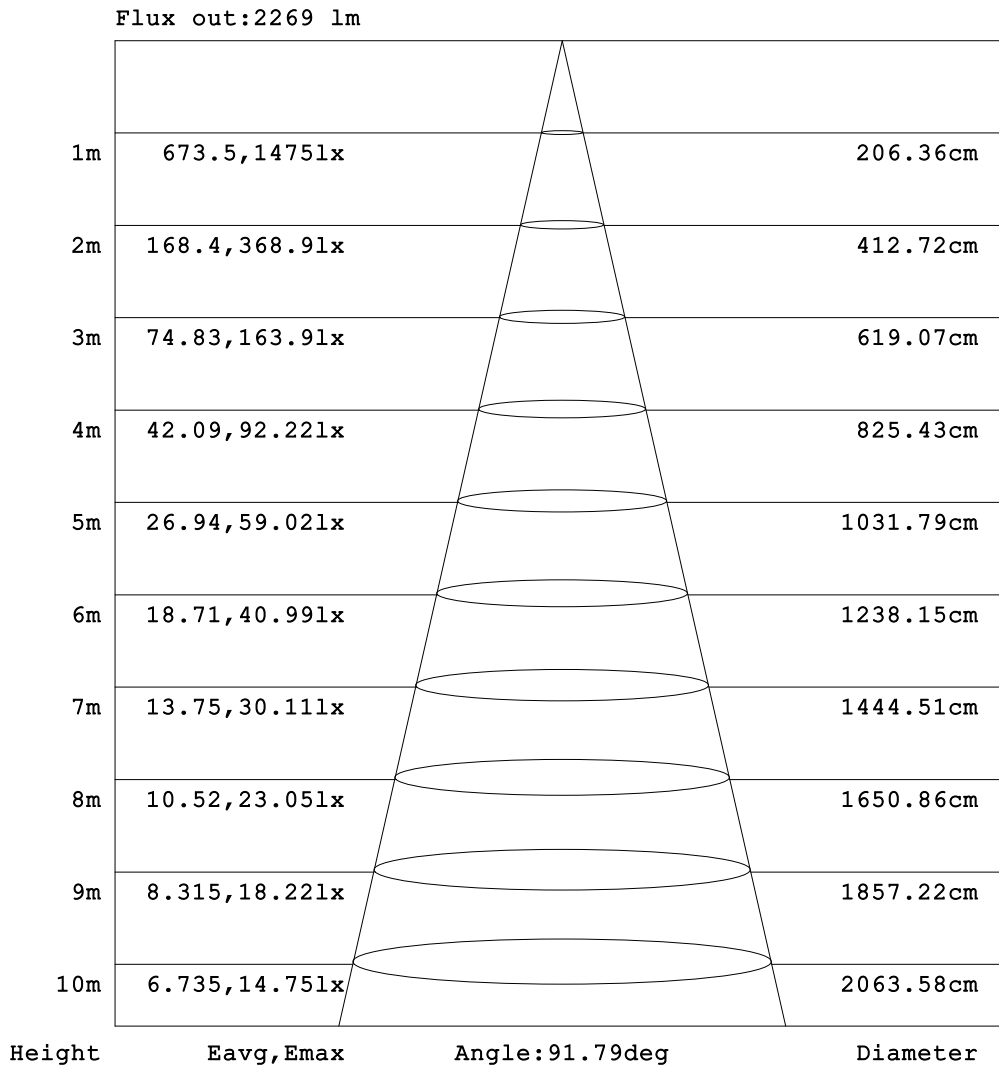


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:240.21V I:0.1261A P:29.478W PF:0.9731 Freq:50.00Hz Lamp Flux:3391.67x1 lm		
NAME: UGR19-60SQ-CC	TYPE:30W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.553*0.553	Shielding Angle:

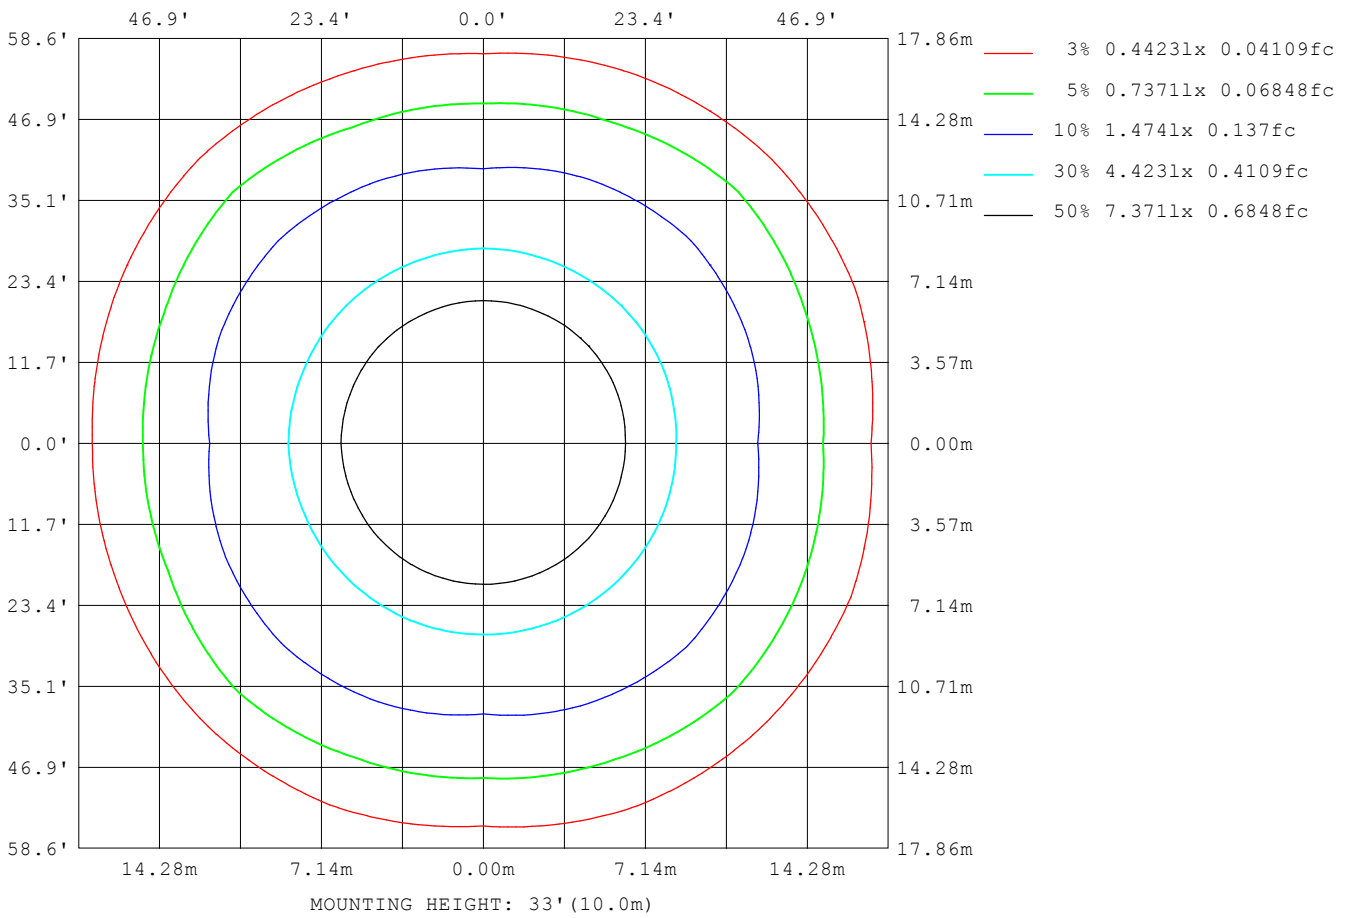

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:240.21V I:0.1261A P:29.478W PF:0.9731 Freq:50.00Hz Lamp Flux:3391.67x1 lm		
NAME: UGR19-60SQ-CC	TYPE:30W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.553*0.553	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1879
L_0~180 (75) av	1643
L_0~180 (85) av	1514
L_90~270 (65) av	1824
L_90~270 (75) av	1627
L_90~270 (85) av	1492
L_45 (65) av	1962
L_45 (75) av	1789
L_45 (85) av	1773

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

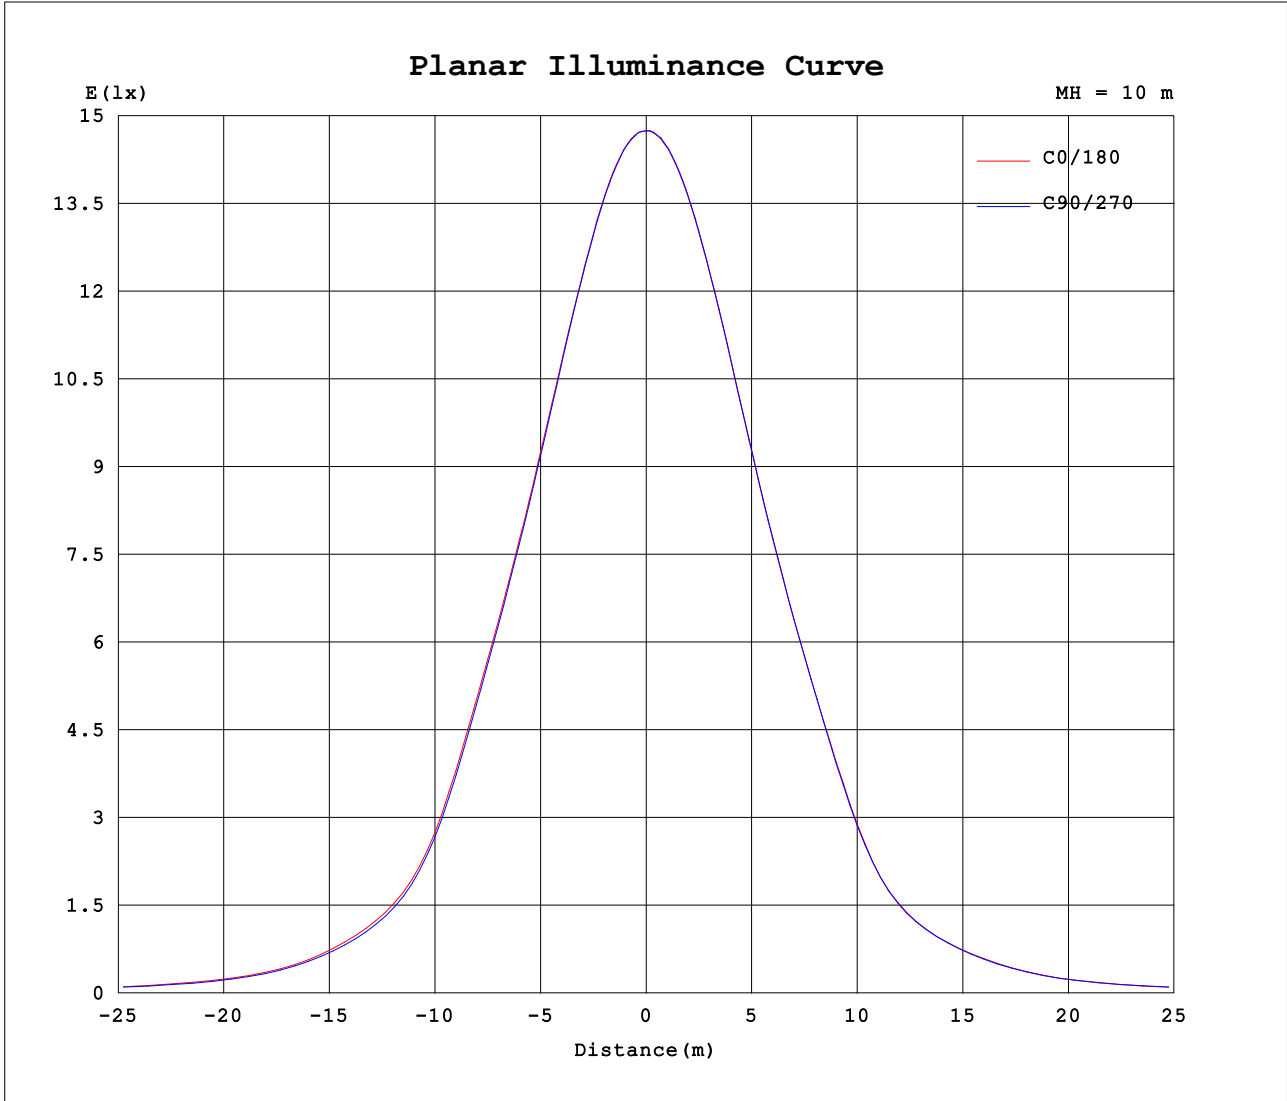

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2022-07-15

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity: 65.0%  
 Test Distance: 8.570m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.21V I:0.1261A P:29.478W PF:0.9731 Freq:50.00Hz Lamp Flux:3391.67x1 lm		
NAME: UGR19-60SQ-CC	TYPE:30W	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:1
MFR.:	SUR.:0.553*0.553	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1474	1475	1475	1475	1475	1475	1475	1475	1474	1475	1475	1475	1475	1475	1475	1475			
5	1469	1469	1469	1469	1468	1468	1467	1468	1468	1468	1469	1470	1470	1471	1472	1472			
10	1448	1449	1448	1447	1446	1447	1445	1446	1450	1449	1449	1450	1452	1452	1452	1453			
15	1414	1415	1414	1414	1411	1412	1411	1412	1417	1417	1418	1418	1419	1419	1420	1420			
20	1368	1373	1373	1370	1364	1367	1368	1368	1373	1374	1376	1375	1375	1378	1381	1379			
25	1312	1318	1320	1314	1305	1309	1314	1310	1315	1318	1324	1318	1318	1323	1331	1325			
30	1244	1244	1245	1239	1234	1236	1240	1238	1245	1247	1253	1247	1248	1252	1261	1256			
35	1157	1151	1143	1142	1144	1138	1137	1142	1163	1155	1157	1155	1165	1160	1165	1166			
40	1017	1013	1006	1001	996	997	999	1007	1039	1027	1028	1024	1036	1028	1034	1036			
45	778	845	837	830	757	813	829	829	818	854	862	843	811	855	869	863			
50	581	654	670	635	555	623	652	644	579	670	682	652	583	665	690	670			
55	463	494	535	473	438	459	513	466	459	489	538	474	458	491	555	498			
60	335	374	372	357	318	354	363	352	348	370	392	362	342	375	403	389			
65	249	259	254	252	231	248	240	244	237	256	255	259	240	261	266	273			
70	190	194	184	189	178	183	181	179	183	183	191	188	187	191	195	202			
75	130	148	144	143	125	134	134	136	130	141	141	141	132	148	148	151			
80	90.2	98.2	98.4	93.6	83.2	86.0	90.0	85.0	81.8	91.5	97.8	91.3	88.5	102	105	103			
85	41.4	44.1	46.6	40.2	36.0	35.7	39.6	34.2	39.3	40.6	46.8	42.0	43.6	47.9	55.9	50.5			
90	1.81	2.25	2.49	1.83	1.15	1.01	0.84	0.80	1.16	1.55	1.87	1.90	2.09	3.13	3.90	3.67			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2022-07-15  
 □ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.404.7  
 Humidity:65.0%  
 Test Distance:8.570m [K=1.0000]  
 Remarks: