




POWER-LITE®

Certainty at The Speed of Light

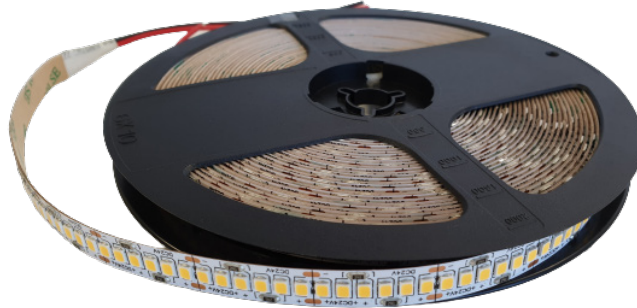

FLS70W | FLS100W
FLS140W | FLS200W



FLS24W | FLS48W

LED FLEXIBLE

STRIP LIGHT

FLS24W, FLS48W, FLS70W
FLS140W, FLS100W, FLS200W

The POWER-LITE® LED Strip Light not only provides a lifelong lighting solution, saving in energy and maintenance costs, but provides a very even light distribution.



APPLICATIONS

Residential
Retail
Commercial



1800 909 306
nedlandsgroup.com.au
sales@nedlandsgroup.com.au




POWER-LITE®


Certainty at The Speed of Light

DIMENSIONS

FLS24W 5m Roll
FLS48W 5m Roll



FLS70W 5m Roll
FLS100W 5m Roll
FLS140W 10m Roll
FLS200W 10m Roll



SCDM
<3 Macadam steps

Efficacy
Up to 100lm/W

CRI
90

LED Driver
Supplied Separately

Carton Qty
1

PRODUCT	SPECIFICATIONS	CODE
24W LED FLEXIBLE STRIP LIGHT	4.8W/m	50,000 hrs LM80
	60 LEDs/m	Working Temp -30°C to +55°C
	>0.9 Power Factor	LED Chip San'an Chip
	Female Connector	3000K 282lm/m FLS24W-WW
		4000K 306lm/m FLS24W-NW
		6000K FLS24W-CW
48W LED FLEXIBLE STRIP LIGHT	9.6W/m	50,000 hrs LM80
	120 LEDs/m	Working Temp -20°C to +40°C
	>0.5 Power Factor	LED Chip San'an Chip
		3000K 1374lm/m FLS48W-WW
		4000K 1470lm/m FLS48W-NW
70W LED FLEXIBLE STRIP LIGHT	14W/m	40,000 hrs LM80
	240 LEDs/m	Working Temp -20°C to +60°C
	>0.9 Power Factor	LED Chip 2835
		3000K 1330lm/m FLS70W-WW
		4000K 1400lm/m FLS70W-NW
140W LED FLEXIBLE STRIP LIGHT	14W/m	40,000 hrs LM80
	240 LEDs/m	Working Temp -20°C to +60°C
	>0.9 Power Factor	LED Chip 2835
		3000K 1330lm/m FLS140W-WW
		4000K 1440lm/m FLS140W-NW
100W LED FLEXIBLE STRIP LIGHT	20W/m	40,000 hrs LM80
	240 LEDs/m	Working Temp -20°C to +60°C
	>0.9 Power Factor	LED Chip 2835
		3000K 1900lm/m FLS100W-WW
		4000K 2000lm/m FLS100W-NW
200W LED FLEXIBLE STRIP LIGHT	20W/m	40,000 hrs LM80
	240 LEDs/m	Working Temp -20°C to +60°C
	>0.9 Power Factor	LED Chip 2835
		3000K 1520lm/m FLS200W-WW
		4000K 1600lm/m FLS200W-NW

IP20

DC24V

120° Beam Angle



POWER-LITE®

Certainty at The Speed of Light

ACCESSORIES

OPTIONS

CODE

LED DRIVERS



24W Non-dimmable	Male Connector	70 x 70 x 40mm	FLS24W-D
DC24V	3 year warranty	IP20	
60W Non-dimmable	5 year warranty	180 x 45 x 32mm	FLS48W-D
DC24V	IP67		
100W 0-10V Dimmable	5 year warranty	250 x 42 x 30mm	FLS-D-100W
DC24V	IP67		
200W 0-10V Dimmable	5 year warranty	240 x 68 x 42mm	FLS-D-200W
DC24V	IP67		
250W 0-10V Dimmable	5 year warranty	245 x 65 x 40mm	FLS-D-250W
DC24V	IP67		

ALUMINIUM EXTRUSION



4M	Black	8 & 10mm Strip width	AL-50/70-B
Mount Type Surface or Suspended	White	IP40	AL-50/70-W
2.5M	Anodised Finish	8 & 10mm Strip width	PL-A020
Mount Type Recessed	Anodised Finish	IP40	
2.5M	Anodised Finish	8 & 10mm Strip width	PL-AL001
Mount Type Recessed	Anodised Finish	IP40	
2.5M	Anodised Finish	8 & 10mm Strip width	PL-AL002
Mount Type Recessed or Surface	Anodised Finish	8 & 10mm Strip width	PL-AL006
2.5M	Anodised Finish	IP40	
Mount Type Corner installation	Anodised Finish	8 & 10mm Strip width	PL-A043
2.5M	Anodised Finish	IP40	
Mount Type Surface	Anodised Finish	8 & 10mm Strip width	PL-AL07F
2.5M	Silver	10mm Strip width	
Mount Type Recessed or Surface	IP67		