




POWER-LITE®

Certainty at The Speed of Light

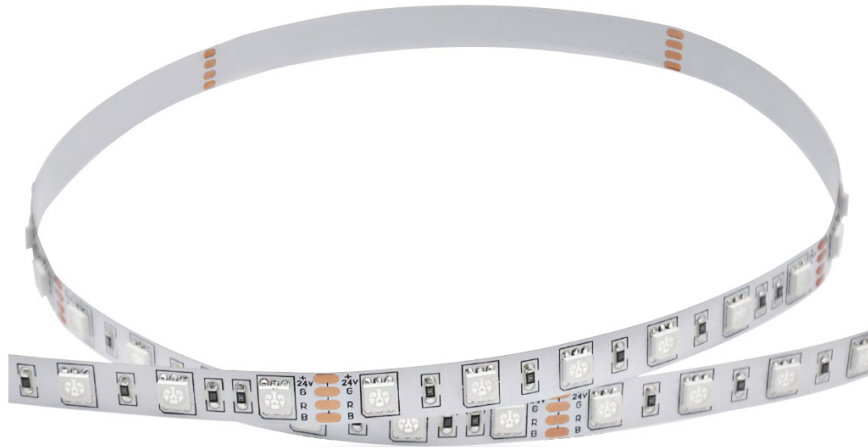

RGB/RGBW LED

STRIP LIGHT

FLS120W-RGB,
FLS140W-RGBW

The POWER-LITE® LED RGB & RGBW Strip Light can enhance any space and even change colour to create the right ambience. They provide a lifelong lighting solution, saving in energy and maintenance costs.



APPLICATIONS

Domestic | Retail
Commercial



1800 909 306
nedlandsgroup.com.au
sales@nedlandsgroup.com.au




POWER-LITE®



Certainty at The Speed of Light

DIMENSIONS

FLS120W-RGB 10m Roll

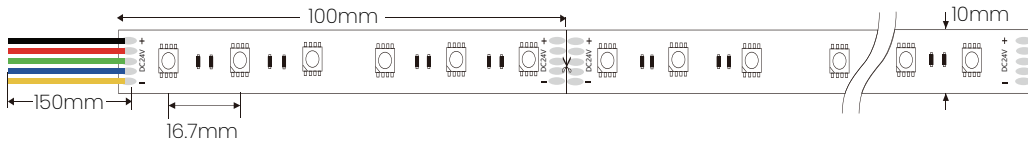

FLS140W-RGBW 10m Roll

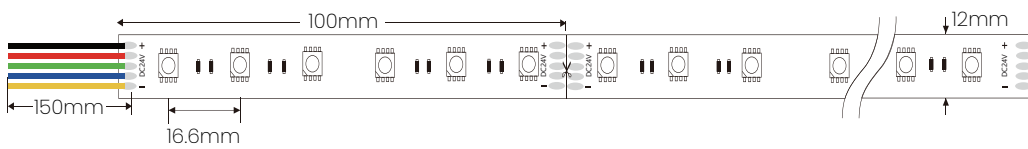

LED Chip
5050

Power Factor
>0.9

Life Expectancy
40,000 hrs LM80

LED Driver
Dimmable
(Supplied Separately)

Working Temp
-30°C to +55°C

CRI
80 (RGBW only)

PRODUCT	SPECIFICATIONS	CODE
120W RGB LED STRIP LIGHT	<ul style="list-style-type: none"> 12W/m 60 LEDs/m 50 Carton Qty 	<ul style="list-style-type: none"> RGB 400lm/m FLS120W-RGB
140W RGBW LED STRIP LIGHT	<ul style="list-style-type: none"> 14W/m 60 LEDs/m 50 Carton Qty 	<ul style="list-style-type: none"> RGBW 704lm/m FLS140W-RGBW

IP IP20

⚡ DC24V

180° Beam Angle



☎ 1800 909 306

🌐 nedlandsgroup.com.au

✉ sales@nedlandsgroup.com.au



POWER-LITE®

Certainty at The Speed of Light

ACCESSORIES

OPTIONS

CODE

LED DRIVERS



100W
0-10V Dimmable



IP67



250 x
42 x
30mm

FLS-D-100W



DC24V



5 year
Warranty



200W
0-10V Dimmable



IP67



240 x
68 x
42mm

FLS-D-200W



DC24V



5 year
Warranty



250W
0-10V Dimmable



IP67



245 x
65 x
40mm

FLS-D-250W



DC24V



5 year
Warranty

WIFI RECEIVER



White



114 x
88 x
20mm

FLS-RC-WIFI

REMOTE CONTROL 4 ZONE



White



86 x
61mm

FLS-RC-W

PVC MOUNTING BOX



Mount Type
Recessed



White



86 x
86 x
33mm

FLS-RC-RB

PVC MOUNTING BOX



Mount Type
Surface
Mounted




White



86 x
86 x
33mm

FLS-RC-SB

ALUMINIUM EXTRUSION



4M



Black



10 & 12mm
Strip width

AL-50/70-B



Mount Type
Surface or
Suspended



White



IP40

AL-50/70-W



2.5M



Anodised
Finish



10 & 12mm
Strip width

PL-A020



Mount Type
Recessed



IP40



2.5M



Anodised
Finish



10 & 12mm
Strip width

PL-AL001



Mount Type
Recessed



IP40



2.5M



Anodised
Finish



10 & 12mm
Strip width

PL-AL002



Mount Type
Recessed or
Surface



IP40



2.5M



Anodised
Finish



10mm
Strip width

PL-AL006



Mount Type
Corner installation



IP40



POWER-LITE®

Certainty at The Speed of Light

ACCESSORIES

ALUMINIUM
EXTRUSION
(cont.)



OPTIONS



2.5M



Mount Type
Surface



2.5M



Mount Type
Recessed or
Surface



Anodised
Finish



IP40



Silver



IP67



10 & 12mm
Strip width



10mm
Strip width

CODE

PL-A043

PL-AL071F

CONNECTION METHODS

