




# POWER-LITE®

Certainty at The Speed of Light



## 8W LED INTEGRAL DRIVER

### DOWNLIGHT

ID8W-7Y

The POWER-LITE® 8W LED Integral Downlight saves energy and costs as compared to standard halogen downlights. These come with a built-in LED driver with IC-4 insulation rating for easy install. This downlight includes the elimination of UV therefore insects will not be attracted to this light.

#### APPLICATIONS

Domestic | Retail  
Commercial




☎ 1800 909 306  
🌐 [nedlandsgroup.com.au](http://nedlandsgroup.com.au)  
✉ [sales@nedlandsgroup.com.au](mailto:sales@nedlandsgroup.com.au)



# POWER-LITE®

Certainty at The Speed of Light

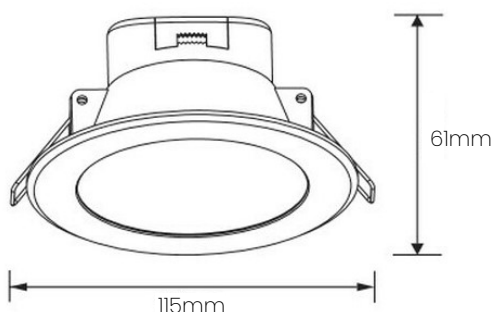

DIMENSIONS	(mm)
Cutout	90-95
Diameter	115
Height	61

#### Notes:

- Compatible with Clipsal C-Bus dimming system
- IC-F / IC-4 rated downlights can be covered and abutted with building materials which can be safely exposed to temperatures of up to 90°C.

**LED Chip**  
Epistar 2835

**Life Expectancy**  
40,000 hrs TM-21

**Working Temp**  
-20°C to +45°C

**CRI**  
>80

**Efficacy**  
Up to 103lm/W

**LED Driver**  
Dimmable  
Integral  
IC-4

**Connection**  
1.2m Lead & Plug

**Carton Qty**  
30



8W



3CCT



3000K  
775lm



4000K  
862lm



5700K  
782lm



AC200-240V



White Frame  
Colour

## PRODUCT

8W LED INTEGRAL DRIVER  
DOWNLIGHT

## CODE

ID8W-7Y

## ACCESSORIES

## OPTIONS

## CODE

DOWNLIGHT RING



Black

ID-BLACK



Brushed  
Chrome Finish  
(304 Marine Grade  
Stainless Steel)

ID-BC

140MM RETROFIT RING



White

ID10W-RF-140



IP54



90°  
Beam Angle



1800 909 306



nedlandsgroup.com.au



sales@nedlandsgroup.com.au




# POWER-LITE®


Certainty at The Speed of Light

## PHOTOMETRICS

ID8W-7Y | 3000K

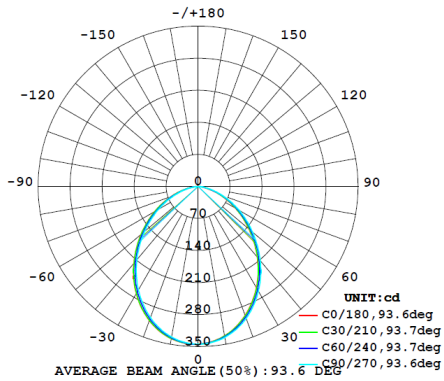

ID8W-7Y | 4000K

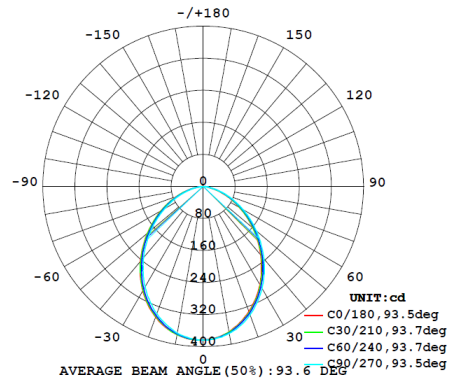

ID8W-7Y | 5700K

