



POWER-LITE®

Certainty at The Speed of Light



LED CYANOSIS

PANEL

LED-CLP

The POWER-LITE® LED Cyanosis Panel is designed to meet the required COI for specific medical environments.

APPLICATIONS

Hospitals
Clinics
Healthcare
Medical Centres



☎ 1800 909 306
🌐 nedlandsgroup.com.au
✉ sales@nedlandsgroup.com.au




POWER-LITE®

Certainty at The Speed of Light

DIMENSIONS (L x W mm)

LED-CLP25W-30/60	595 x 295
LED-CLP36W-60SQ	595 x 595
LED-CLP36W-120/30	1195 x 295
LED-CLP48W-120/60	1195 x 595

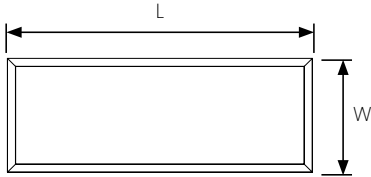

LED Chip
2835 SMD

Special CRI 9 (R9)
73

Life Expectancy
50,000 hrs TM-21

UGR
<19

Working Temp
-20°C to +45°C

Efficacy
Up to 97lm/W

Power Factor
>0.9

LED Driver
Non-dimmable

CRI
>90

Connection
1.2m Power Cable with
SAA plug

COI
<3.3

Replaces
72w Fluorescent



ICCT



4000K



AC198-264V



White Frame
Colour

PRODUCT OPTIONS OPTIONS CODE

LED CYANOSIS PANEL

25W

Net Weight
2.7kg

LED-CLP25W-30/60

2000lm

Carton Qty
5

595mm x
295mm

36W

Net Weight
3.7kg

LED-CLP36W-60SQ

3100lm

Carton Qty
5

595mm x
595mm

36W

Net Weight
3.7kg

LED-CLP36W-120/30

3100lm

Carton Qty
5

1195mm x
295mm

48W

Net Weight
7kg

LED-CLP48W-120/60


5000lm

Carton Qty
2

1195mm x
595mm



IP44



80°
Beam Angle



















POWER-LITE®

Certainty at The Speed of Light

ACCESSORIES

CODE














FLUSH MOUNT PANEL KIT

	To fit Panel Size	Overall Frame Coverage			
	 300mm x 600mm	 320mm x 620mm	 302mm x 602mm		LED-LPFM-30/60
	 595mm x 595mm	 626mm x 626mm	 602mm x 602mm		LED-LPFM-60SQ
	 1195mm x 295mm	 1226mm x 326mm	 1202mm x 302mm		LED-LPFM-120/30
	 1195mm x 595mm	 1220mm x 620mm	 1202mm x 602mm		LED-LPFM-120/60





















CABLE SUSPENSION KIT

	 Length 1m	 Carton Qty 1		LED-LPCSK
---	---	--	--	-----------

LED DRIVERS

	Options			
	DIMMABLE	 30W	 For 25W LED light panels	LP30W-D-DIM
		 36W	 For 36W LED light panels	LP36W-D-DIM
	DALI DIMMABLE	 NOTE Driver needs to be set to 650mA for 25W LED light panels only	 For 25W & 36W LED light panels	LED-LPE-DALI
			 For 48W LED light panels	LED-LPE60W-DALI
	EMERGENCY KIT		 For all LED light panels	LPE-EP

SENSORS

	Mount Type	Detection Range	Detection Distance	
	 Recessed	 360°	 12m	MS-12M-360
		 360°	 16m	MS-8M-360-MW
	 Surface Mount	 360°	 6m	MS-6M-360
		 360°	 12m	MS-12M-360-SM
		 180°	 12m	MS-12M-180
		 360°	 16m	MS-8M-360-SM-MW




POWER-LITE®


Certainty at The Speed of Light

PHOTOMETRICS


LED-CLP25W-30/60 | 4000K

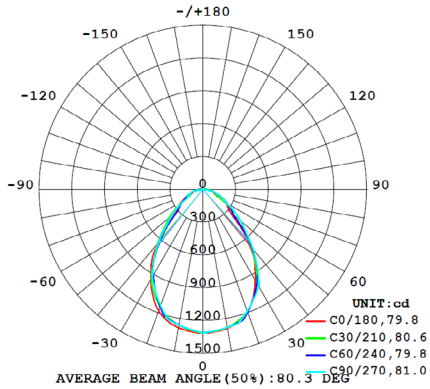

LED-CLP36W-60SQ | 4000K

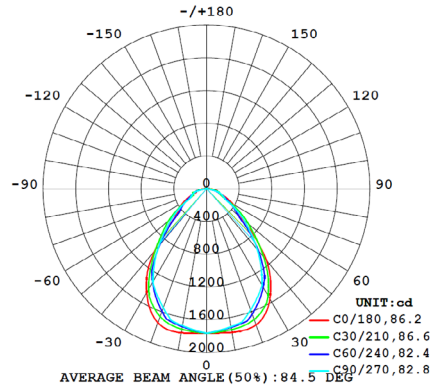

LED-CLP36W-120/30 | 4000K

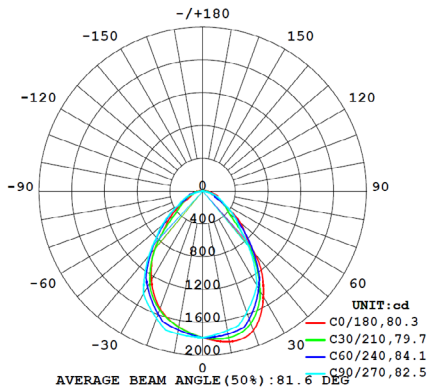

LED-CLP48W-120/60 | 4000K

