




POWER-LITE®

Certainty at The Speed of Light

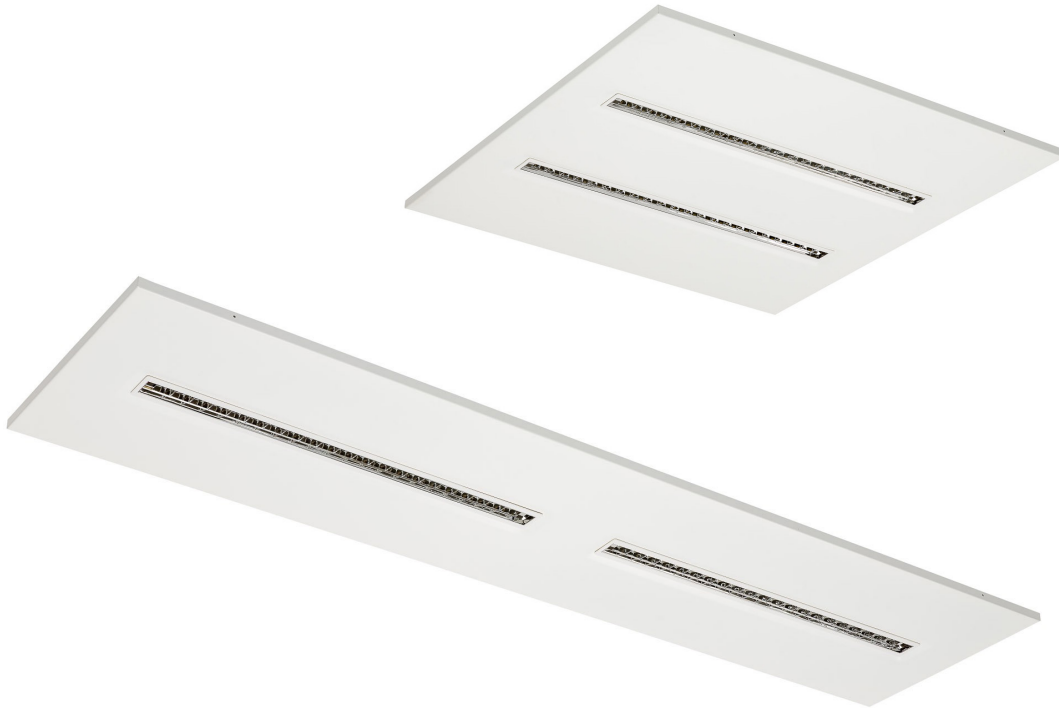

UGR <16 LED LIGHT

PANEL

UGR16-30W

The POWER-LITE® UGR <16 LED Light Panel provides a low glare lighting solution whilst achieving excellent lux levels and uniformity.



RoHS



APPLICATIONS

Office | Retail
Healthcare
Commercial
Recreation
Domestic



☎ 1800 909 306
🌐 nedlandsgroup.com.au
✉ sales@nedlandsgroup.com.au




POWER-LITE®


Certainty at The Speed of Light

DIMENSIONS

UGR16-30W-60SQ

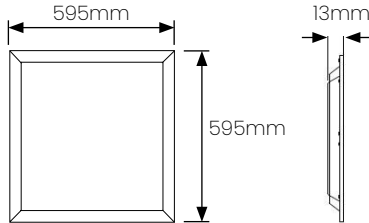

UGR16-30W-120/30

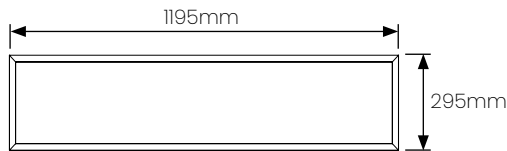

LED Chip

Epistar 2835

Life Expectancy

50,000 hrs TM-21

Working Temp

-20°C to +40°C

Power Factor

>0.9

CRI

>80

UGR

<16

Efficacy

Up to 151lm/W

LED Driver

Lifud SAA Approved
Non-dimmable

Material

Steel

Connection Type

1.2m Power Cable

Replaces

72W Fluorescent fitting

Carton Qty


4



30W



ICCT









4000K
4500lm



AC220-240V




White Frame
Colour

PRODUCT	SPECIFICATIONS	CODE
UGR <16 LED LIGHT PANEL	 595mm x 595mm x 13mm	 Net Weight 4.5kg
	 2.8 Macadam Steps	UGR16-30W-60SQ
	 1195mm x 295mm x 13mm	 Net Weight 4.75kg
	 2.8 Macadam Steps	UGR16-30W-120/30



IP20



70-85°
Beam Angle



POWER-LITE®

Certainty at The Speed of Light

ACCESSORIES

CODE

FLUSH MOUNT PANEL KIT

	To fit Panel Size	Overall Frame Coverage		
	595mm x 595mm	626mm x 626mm	602mm x 602mm	LED-LPFM-60SQ
	1195mm x 295mm	1226mm x 326mm	1202mm x 302mm	LED-LPFM-120/30

LED DRIVERS

Options

	STANDARD	LP30W-D
	DIMMABLE	LP30W-D-DIM
	DALI DIMMABLE	LED-LPE30W-DALI
	EMERGENCY KIT	LPE-EP

SENSORS

Mount Type

Detection Range

Detection Distance

	Recessed	360°	12m	MS-12M-360
		360°	16m	MS-8M-360-MW
	Surface Mount	360°	6m	MS-6M-360
		360°	12m	MS-12M-360-SM
		180°	12m	MS-12M-180
		360°	16m	MS-8M-360-SM-MW




POWER-LITE®

Certainty at The Speed of Light

PHOTOMETRICS

UGR16-30W-60SQ | 4000K

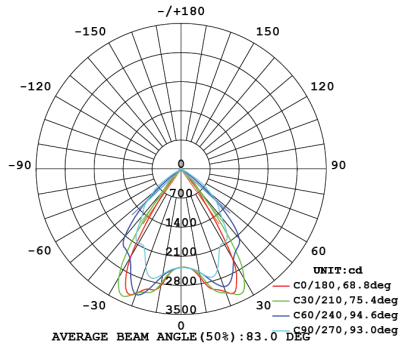

UGR16-30W-120/30 | 4000K

