




POWER-LITE®

Certainty at The Speed of Light

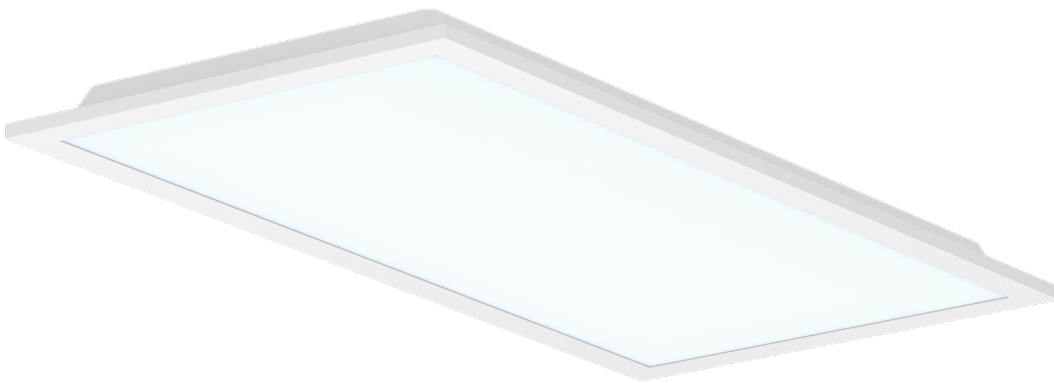

UGR <19 LED LIGHT

PANEL

UGR19

The POWER-LITE® UGR <19 LED Light Panel provides a low glare lighting solution whilst achieving excellent lux levels and uniformity.



APPLICATIONS

Office | Retail
Healthcare
Commercial
Recreation
Domestic



☎ 1800 909 306
🌐 nedlandsgroup.com.au
✉ sales@nedlandsgroup.com.au




POWER-LITE®


Certainty at The Speed of Light

DIMENSIONS

UGR19-30/60-CC

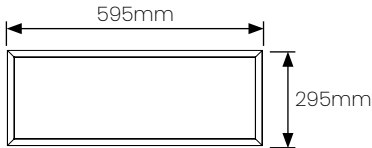

UGR19-60SQ-CC

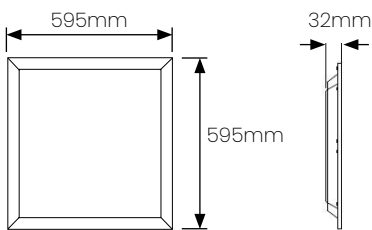

UGR19-120/30-CC



Notes:

- IC Rating for panel only (driver is NOT IC-4 rated)

LED Chip
CRI80 SMD

Life Expectancy
50,000 hrs TM-21

Working Temp
-10°C to +40°C

Power Factor
>0.9

CRI
>80

UGR
<19

Efficacy
Up to 115lm/W

LED Driver
Flicker Free
Non-Dimmable

Connection Type
1.5m Power Cable with
SAA Plug

Replaces
72W Fluorescent fitting

Carton Qty
6



PRODUCT SPECIFICATIONS CODE

UGR <19 LED LIGHT
PANEL



Net Weight
1.17kg

2.9 Macadam
Steps

3000K
1652lm

4000K
1730lm

5000K
1692lm

UGR19-30/60-CC



Net Weight
1.90kg

1.7 Macadam
Steps

3000K
3215lm

4000K
3391lm

5000K
3362lm

UGR19-60SQ-CC



Net Weight
2.05kg

1.7 Macadam
Steps

3000K
3090lm

4000K
3288lm

5000K
3292lm

UGR19-120/30-CC



1800 909 306

nedlandsgroup.com.au

sales@nedlandsgroup.com.au




POWER-LITE®


Certainty at The Speed of Light

PHOTOMETRICS


UGR19-30/60-CC | 3000K

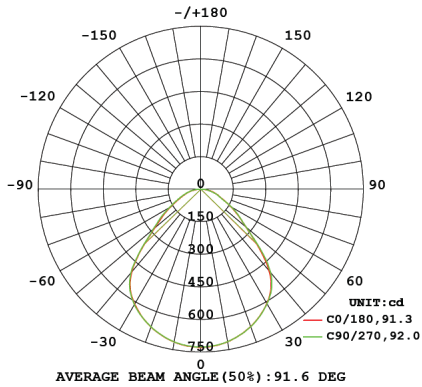


UGR19-30/60-CC | 4000K

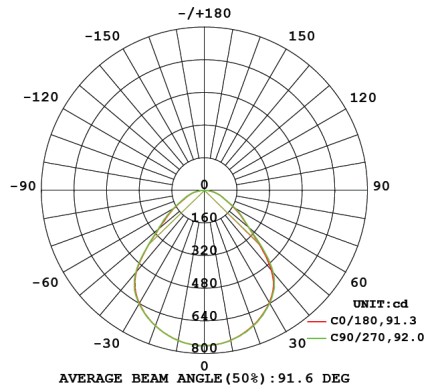


UGR19-30/60-CC | 5000K

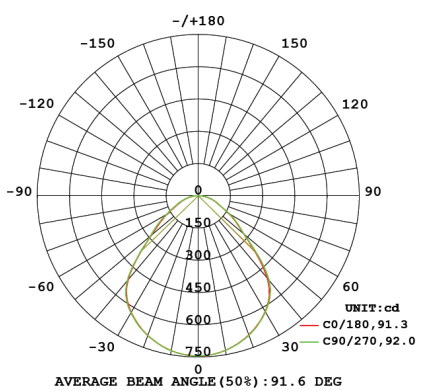


UGR19-60SQ-CC | 3000K

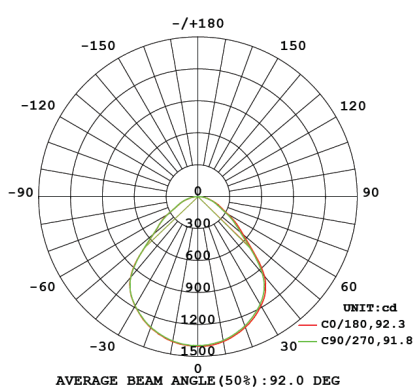

UGR19-60SQ-CC | 4000K

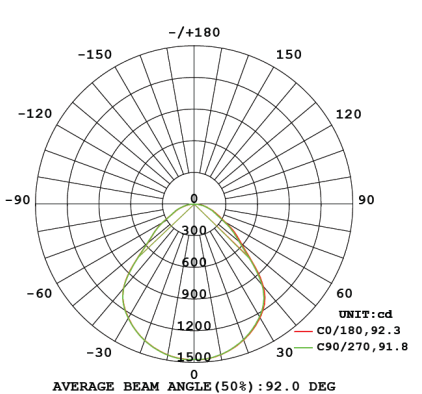

UGR19-60SQ-CC | 5000K

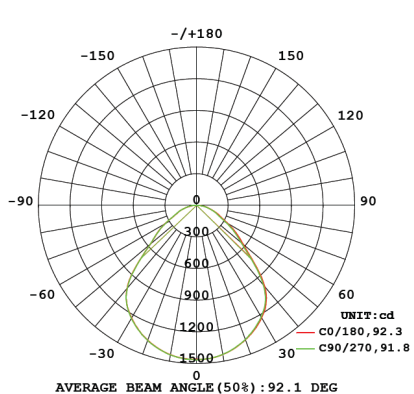




POWER-LITE®


Certainty at The Speed of Light

PHOTOMETRICS

UGR19-120/30-CC | 3000K

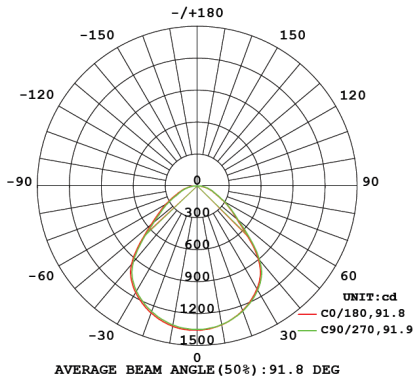

UGR19-120/30-CC | 4000K

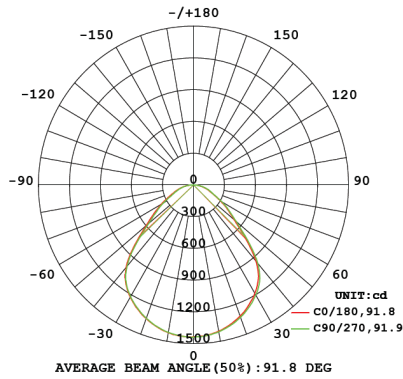

UGR19-120/30-CC | 5000K

