



POWER-LITE®

Certainty at The Speed of Light



UGR <19 LED LIGHT

PANEL

UGR19-LPE

The POWER-LITE® UGR <19 LED Light Panel provides a low glare lighting solution whilst achieving excellent lux levels and uniformity.



APPLICATIONS

Office | Retail
Healthcare
Commercial
Recreation
Domestic



☎ 1800 909 306
🌐 nedlandsgroup.com.au
✉ sales@nedlandsgroup.com.au




POWER-LITE®

Certainty at The Speed of Light

DIMENSIONS (L x W mm)

UGR19-LPE18W-30/60 595 x 295
 UGR19-LPE36W-60SQ 595 x 595
 UGR19-LPE36W-120/30 1195 x 295

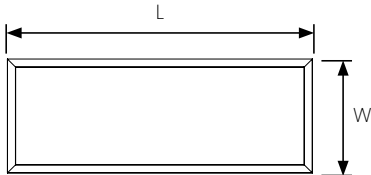

LED Chip
Epistar

Life Expectancy
50,000 hrs TM-21

Working Temp
-20°C to +40°C

Power Factor
>0.9

CRI
80Ra

UGR
<19

Efficacy
Up to 115lm/W

LED Driver
Lifud SAA Approved
Flicker Free

Connection Type
1.2m Power Cable with
SAA Plug

Replaces
72W Fluorescent fitting

Carton Qty
5



PRODUCT	SPECIFICATIONS	CODE
UGR <19 LED LIGHT PANEL	18W	Net Weight 1.75kg 3.6 Macadam Steps
	2000lm	
	595mm x 295mm	
UGR19-LPE36W-60SQ	36W	Net Weight 3.1kg 1.7 Macadam Steps
	3500lm	
	595mm x 595mm	
UGR19-LPE36W-120/30	36W	Net Weight 3.05kg 1.7 Macadam Steps
	3500lm	
	1195mm x 295mm	





POWER-LITE®

Certainty at The Speed of Light

ACCESSORIES

CODE

FLUSH MOUNT PANEL KIT




To fit Panel Size




300mm x 600mm

Overall Frame Coverage



320mm x 620mm




302mm x 602mm


LED-LPFM-30/60



595mm x 595mm



626mm x 626mm




602mm x 602mm


LED-LPFM-60SQ



1195mm x 295mm



1226mm x 326mm



1202mm x 302mm

LED-LPFM-120/30

CABLE SUSPENSION KIT



Length 1m



Carton Qty 1

LED-LPCSK

LED DRIVERS

Options



STANDARD



For 36W LED light panels

LED-LP36W-D




DIMMABLE



For 18W LED light panels

LP18W-D-DIM



For 36W LED light panels

LP36W-D-DIM



DALI DIMMABLE




For 36W LED light panels

LED-LPE-DALI



EMERGENCY KIT



For all LED light panels

LPE-EP

SENSORS

Mount Type

Detection Range

Detection Distance



Recessed



360°




12m

MS-12M-360



360°



16m


MS-8M-360-MW



Surface Mount



360°



6m

MS-6M-360



360°



12m

MS-12M-360-SM



180°



12m

MS-12M-180



360°



16m

MS-8M-360-SM-MW




POWER-LITE®


Certainty at The Speed of Light

PHOTOMETRICS

UGR19-LPE18W-30/60 | 4000K

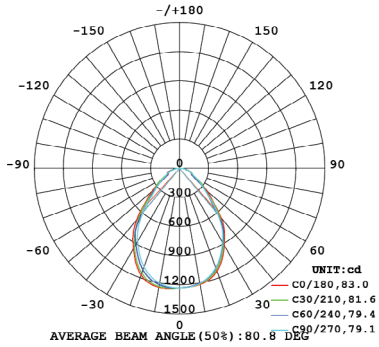

UGR19-LPE36W-60SQ | 4000K

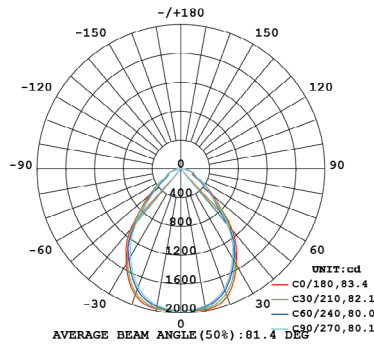

UGR19-LPE36W-120/30 | 4000K

