
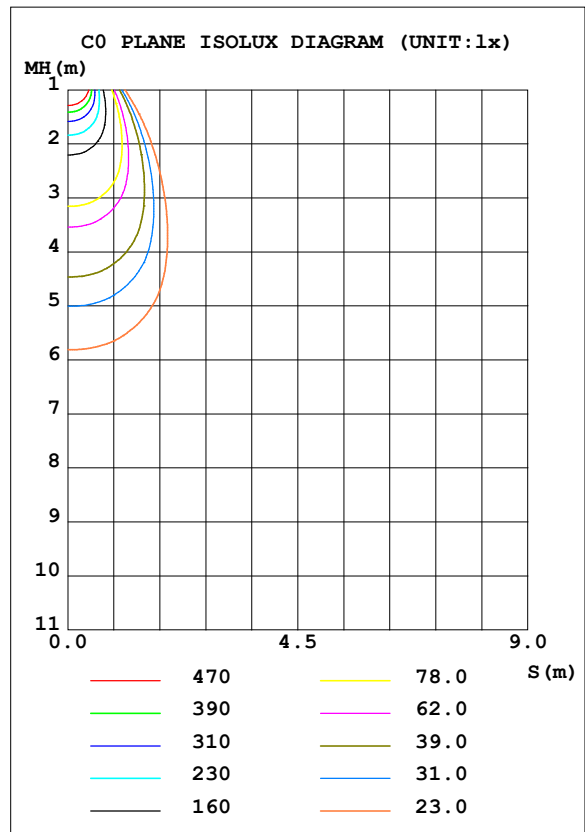


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.13V I:0.0454A P:9.0365W PF:0.8428 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:794.993x1 lm		
NAME: CD10W-CC-B 3000K	TYPE: 10W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 87.98 lm/W			
MODEL	CD10W-CC-B 3000K	I <sub>max</sub> (cd)	776.5	S/MH (C0/180)	0.84
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	0.86
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	794.99	<input type="checkbox"/> UP, DN (C0-180)	0.4, 52.8
NOMINAL FLUX (lm)	794.993	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.4, 46.3
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.9	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	230.4	<input type="checkbox"/> down (%)	99.1	CIBSE SHR MAX	0.90

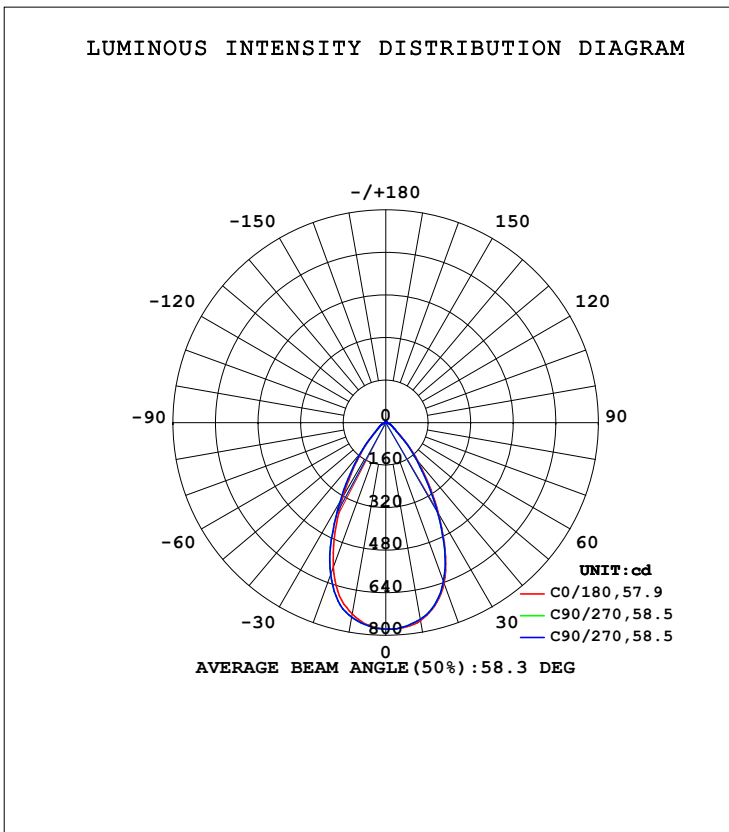

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-01-11

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity: 65.0%  
 Test Distance: 8.690m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

mm	C0	C90	C180	C270					mm	□ zone	□ total	%lum, lamp
10	755.9	750.2	730.4	742.6					0- 10	72.65	72.65	9.14,9.14
20	642.6	635.3	577.6	608.0					10- 20	194.2	266.8	33.6,33.6
30	399.0	391.4	322.6	346.3					20- 30	225.4	492.2	61.9,61.9
40	188.5	177.2	136.9	145.7					30- 40	157.3	649.5	81.7,81.7
50	62.03	57.86	44.86	46.72					40- 50	75.52	725.0	91.2,91.2
60	29.10	28.16	23.92	25.21					50- 60	32.91	757.9	95.3,95.3
70	15.46	15.06	12.00	13.09					60- 70	19.76	777.7	97.8,97.8
80	4.607	4.377	3.029	3.549					70- 80	8.861	786.5	98.9,98.9
90	0.0894	0.0793	0.0731	0.0798					80- 90	1.632	788.2	99.1,99.1
100	0.0790	0.1284	0.1278	0.0732					90-100	0.0961	788.3	99.2,99.2
110	0.1887	0.2689	0.2681	0.1830					100-110	0.1608	788.4	99.2,99.2
120	0.4744	0.5808	0.5848	0.4809					110-120	0.3541	788.8	99.2,99.2
130	1.051	1.179	1.175	1.066					120-130	0.7134	789.5	99.3,99.3
140	1.867	1.989	1.978	1.865					130-140	1.162	790.7	99.5,99.5
150	2.700	2.832	2.777	2.646					140-150	1.454	792.1	99.6,99.6
160	3.414	3.539	3.451	3.347					150-160	1.422	793.5	99.8,99.8
170	4.047	4.112	4.078	3.952					160-170	1.056	794.6	99.9,99.9
180	4.388	4.386	4.388	4.319					170-180	0.4001	795.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

0 - 45 DEG Zonal Flux:696.31      %lum: 87.6%

0 - 60 DEG Zonal Flux:757.92      %lum: 95.3%

All measured values may vary less than 35 %

from the average measured value in the 0 to 130 deg. zone: 5.9%

All measured values in the 0 to 130 deg. zone


may vary less than 50% from the average value of itself: 8.8%

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-01-11

□ Range: 0 - 180DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:230.13V I:0.0454A P:9.0365W PF:0.8428 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:794.993x1 lm		
NAME: CD10W-CC-B 3000K	TYPE: 10W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

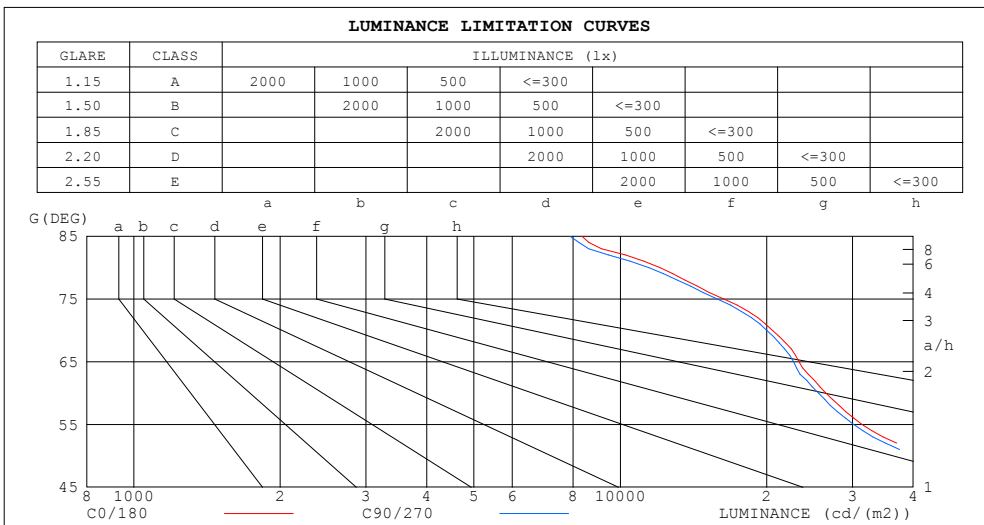

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8339	7894
80	12073	11445
75	16322	15848
70	20568	19999
65	23317	22716
60	26481	25571
55	31417	30217
50	43913	40872
45	73862	68505


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-01-11

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.13V I:0.0454A P:9.0365W PF:0.8428 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:794.993x1 lm		
NAME: CD10W-CC-B 3000K	TYPE: 10W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.09	1.07	1.04	1.07	1.05	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91
2.0	1.01	.96	.92	.99	.95	.91	.95	.92	.89	.92	.89	.87	.89	.87	.85	.83
3.0	.93	.87	.83	.91	.86	.82	.88	.84	.81	.86	.82	.79	.83	.80	.78	.76
4.0	.86	.80	.75	.85	.79	.75	.82	.77	.74	.80	.76	.73	.78	.75	.72	.70
5.0	.80	.73	.69	.79	.73	.68	.77	.72	.68	.75	.70	.67	.73	.69	.66	.65
6.0	.74	.68	.63	.73	.67	.63	.72	.66	.62	.70	.65	.62	.69	.65	.61	.60
7.0	.69	.63	.58	.69	.63	.58	.67	.62	.58	.66	.61	.57	.65	.60	.57	.55
8.0	.65	.59	.54	.65	.58	.54	.63	.58	.54	.62	.57	.53	.61	.57	.53	.52
9.0	.61	.55	.51	.61	.55	.50	.60	.54	.50	.59	.54	.50	.58	.53	.50	.48
10.0	.58	.52	.47	.57	.51	.47	.56	.51	.47	.55	.50	.47	.55	.50	.47	.45

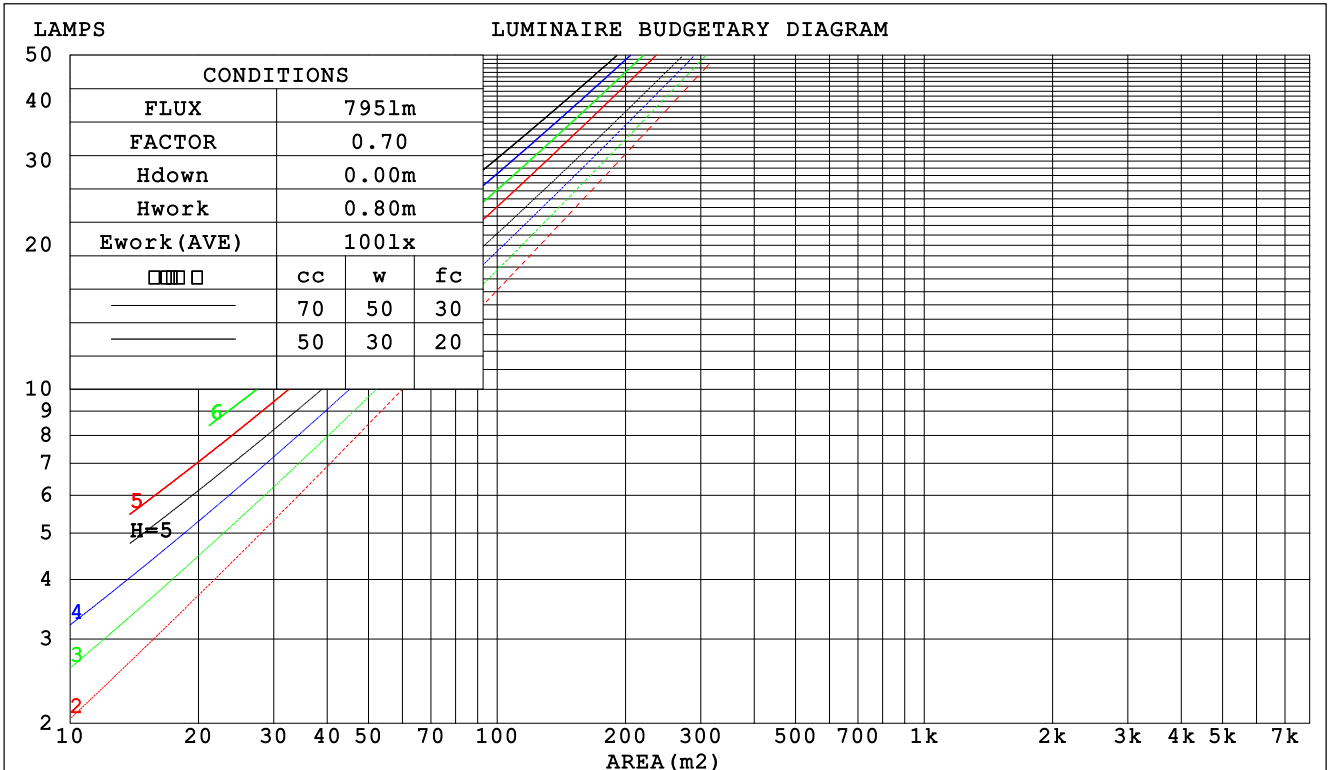

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-01-11

□ Range: 0 - 180DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:230.13V I:0.0454A P:9.0365W PF:0.8428 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:794.993x1 lm		
NAME: CD10W-CC-B 3000K	TYPE: 10W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.201 .114 .036	.194 .110 .035	.180 .104 .033	.168 .097 .031	.157 .091 .029	
2.0	.192 .105 .032	.187 .103 .032	.175 .097 .030	.165 .092 .029	.155 .088 .028	
3.0	.183 .097 .029	.177 .095 .029	.168 .091 .028	.159 .087 .027	.150 .083 .026	
4.0	.173 .090 .026	.168 .088 .026	.160 .085 .025	.152 .082 .025	.145 .079 .024	
5.0	.164 .083 .024	.160 .082 .024	.152 .079 .023	.145 .077 .023	.139 .074 .022	
6.0	.155 .078 .022	.152 .077 .022	.145 .074 .022	.139 .072 .021	.133 .070 .021	
7.0	.148 .073 .021	.145 .072 .021	.139 .070 .020	.133 .068 .020	.128 .066 .020	
8.0	.140 .069 .019	.138 .068 .019	.132 .066 .019	.127 .065 .019	.123 .063 .018	
9.0	.134 .065 .018	.131 .064 .018	.127 .063 .018	.122 .061 .018	.118 .060 .017	
10.0	.128 .061 .017	.126 .061 .017	.121 .059 .017	.117 .058 .017	.113 .057 .016	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.197 .197 .197	.168 .168 .168	.115 .115 .115	.066 .066 .066	.021 .021 .021	
1.0	.179 .164 .150	.153 .140 .129	.105 .097 .089	.060 .056 .052	.019 .018 .017	
2.0	.166 .139 .117	.142 .120 .101	.097 .083 .070	.056 .048 .041	.018 .016 .013	
3.0	.154 .120 .093	.132 .104 .081	.091 .072 .057	.052 .042 .033	.017 .014 .011	
4.0	.145 .106 .076	.124 .092 .066	.085 .064 .047	.049 .037 .028	.016 .012 .009	
5.0	.136 .095 .064	.117 .082 .055	.081 .057 .039	.047 .034 .023	.015 .011 .008	
6.0	.129 .086 .054	.111 .074 .047	.077 .052 .033	.044 .031 .020	.014 .010 .007	
7.0	.123 .078 .047	.106 .068 .041	.073 .048 .029	.042 .028 .017	.014 .009 .006	
8.0	.117 .072 .041	.101 .063 .036	.070 .044 .026	.041 .026 .015	.013 .008 .005	
9.0	.112 .067 .037	.096 .058 .032	.067 .041 .023	.039 .024 .014	.013 .008 .004	
10.0	.107 .063 .033	.092 .054 .029	.064 .038 .021	.037 .023 .012	.012 .007 .004	

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-01-11

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:230.13V I:0.0454A P:9.0365W PF:0.8428 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:794.993x1 lm		
NAME: CD10W-CC-B 3000K	TYPE: 10W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.4	25.5	24.7	25.7	25.9	24.2	25.3	24.5	25.5	25.7
3H	24.7	25.7	25.0	25.9	26.2	24.5	25.5	24.8	25.7	26.0
4H	24.8	25.8	25.1	26.0	26.2	24.6	25.6	24.9	25.8	26.0
6H	24.9	25.7	25.2	26.0	26.2	24.7	25.5	25.0	25.8	26.1
8H	24.8	25.7	25.2	25.9	26.2	24.6	25.5	25.0	25.7	26.0
12H	24.8	25.6	25.2	25.9	26.2	24.6	25.4	25.0	25.7	26.0
4H 2H	24.4	25.4	24.7	25.6	25.8	24.3	25.2	24.6	25.4	25.7
3H	24.9	25.7	25.2	26.0	26.3	24.7	25.5	25.0	25.8	26.1
4H	25.0	25.8	25.4	26.1	26.4	24.9	25.6	25.2	25.9	26.2
6H	25.1	25.7	25.5	26.1	26.5	24.9	25.6	25.3	25.9	26.3
8H	25.1	25.7	25.5	26.1	26.5	24.9	25.5	25.4	25.9	26.3
12H	25.1	25.6	25.5	26.0	26.4	24.9	25.5	25.3	25.8	26.3
8H 4H	25.0	25.6	25.4	26.0	26.4	24.9	25.5	25.3	25.8	26.2
6H	25.2	25.6	25.6	26.0	26.5	25.0	25.5	25.4	25.9	26.3
8H	25.2	25.6	25.6	26.0	26.5	25.0	25.4	25.5	25.9	26.3
12H	25.2	25.5	25.6	26.0	26.5	25.0	25.4	25.5	25.8	26.3
12H 4H	25.0	25.5	25.4	25.9	26.3	24.8	25.4	25.3	25.8	26.2
6H	25.1	25.5	25.6	26.0	26.4	25.0	25.4	25.4	25.8	26.3
8H	25.1	25.5	25.6	26.0	26.5	25.0	25.3	25.5	25.8	26.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.4 / - 2.2					+ 1.3 / - 2.1				
1.5H	+ 2.5 / - 2.0					+ 2.4 / - 1.9				
2.0H	+ 3.0 / - 1.4					+ 2.8 / - 1.3				

CIE Pub.117, 795.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.8)  
Area: 0.0022 m2

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-01-11

Range: 0 - 180DEG  
 Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
Humidity:65.0%  
Test Distance:8.690m [K=1.0000]  
Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:230.13V I:0.0454A P:9.0365W PF:0.8428 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:794.993x1 lm		
NAME: CD10W-CC-B 3000K	TYPE: 10W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	80	73	68	80	72	68	79	72	68	63
0.80	88	81	77	88	81	77	86	80	76	72
1.00	94	87	83	93	87	82	91	87	82	77
1.25	99	92	88	98	92	88	95	90	87	82
1.50	102	96	92	101	95	92	98	94	90	85
2.00	106	101	97	104	99	96	101	97	94	88
2.50	108	103	100	106	102	99	103	99	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	105	106	104	102	94
5.00	114	111	108	111	109	107	107	105	104	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-01-11

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:230.13V I:0.0454A P:9.0365W PF:0.8428 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:794.993x1 lm		
NAME: CD10W-CC-B 3000K	TYPE: 10W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

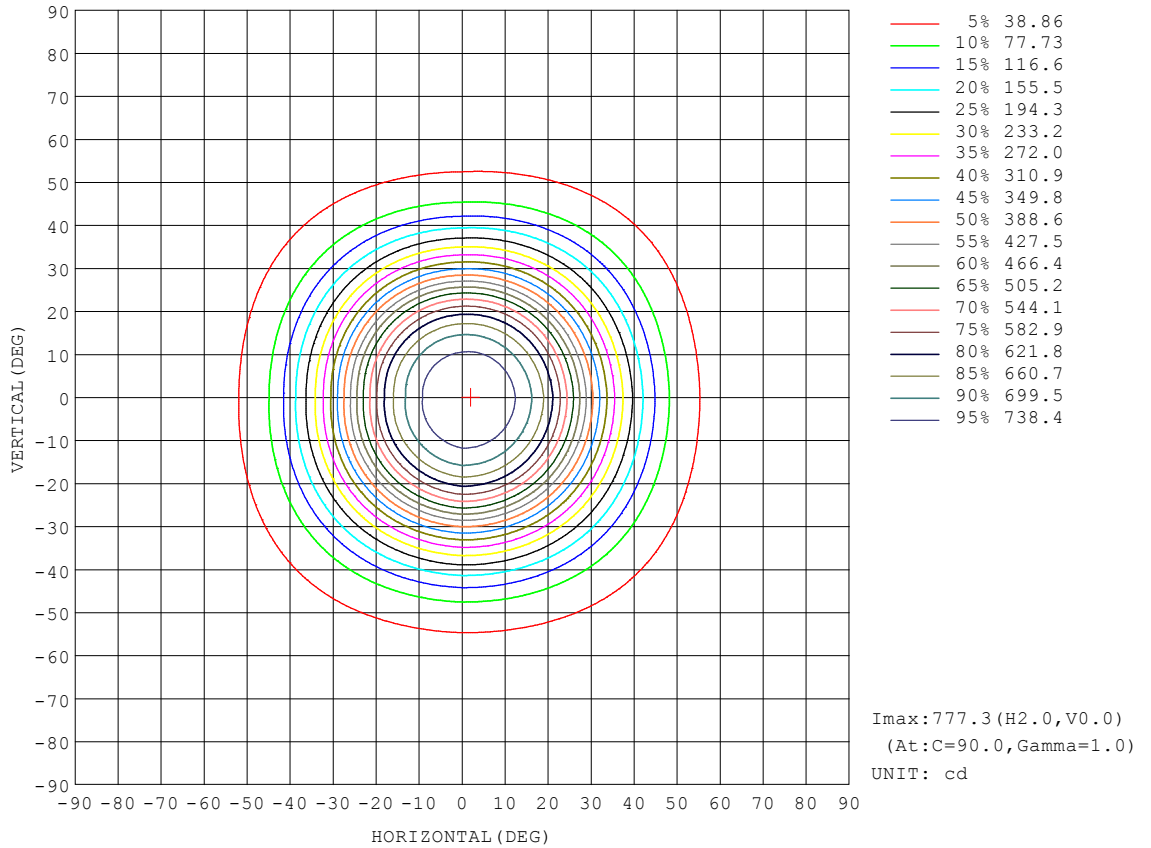


C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-01-11

Range: 0 - 180DEG  
 Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
Humidity:65.0%  
Test Distance:8.690m [K=1.0000]  
Remarks:



**AAI Figure**

Test:U:230.13V I:0.0454A P:9.0365W PF:0.8428 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:794.993x1 lm		
NAME: CD10W-CC-B 3000K	TYPE: 10W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

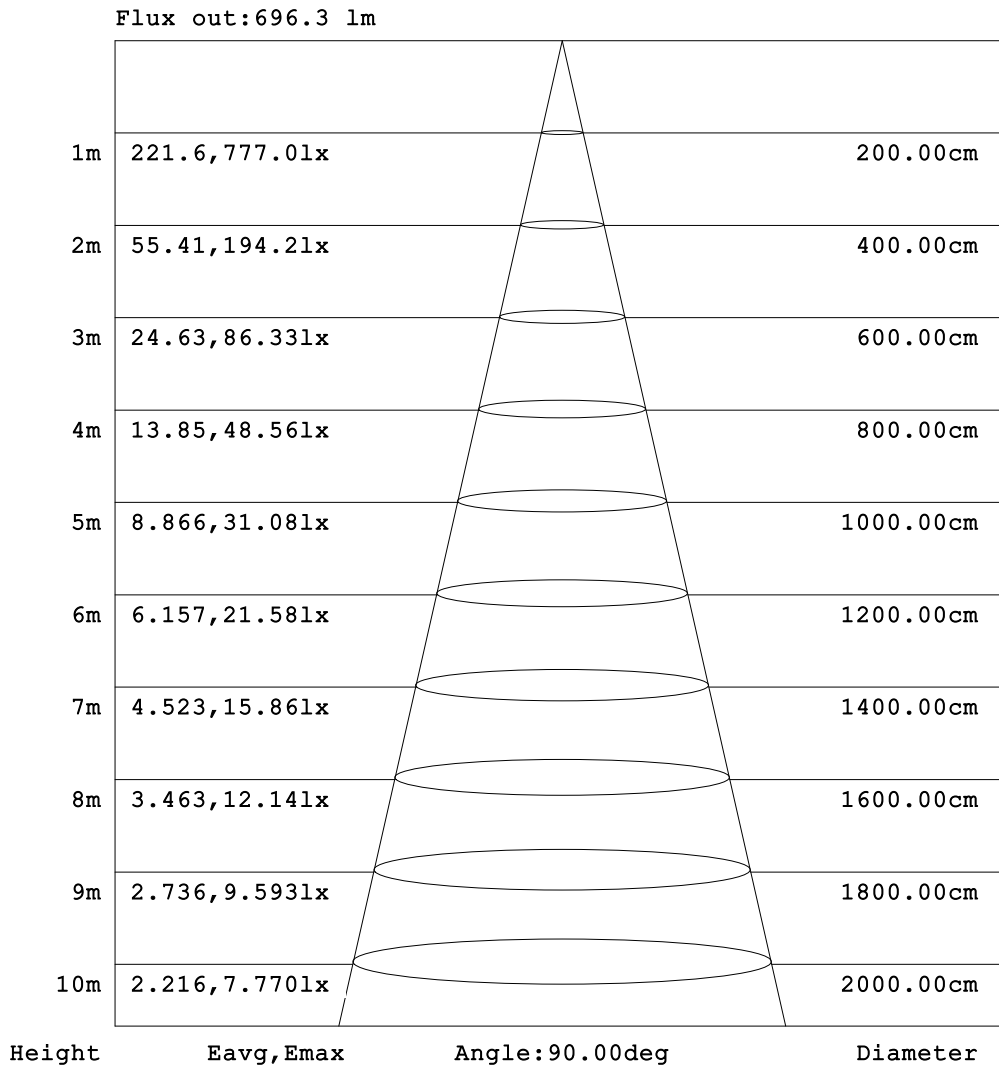


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-01-11

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:230.13V I:0.0454A P:9.0365W PF:0.8428 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:794.993x1 lm		
NAME: CD10W-CC-B 3000K	TYPE: 10W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

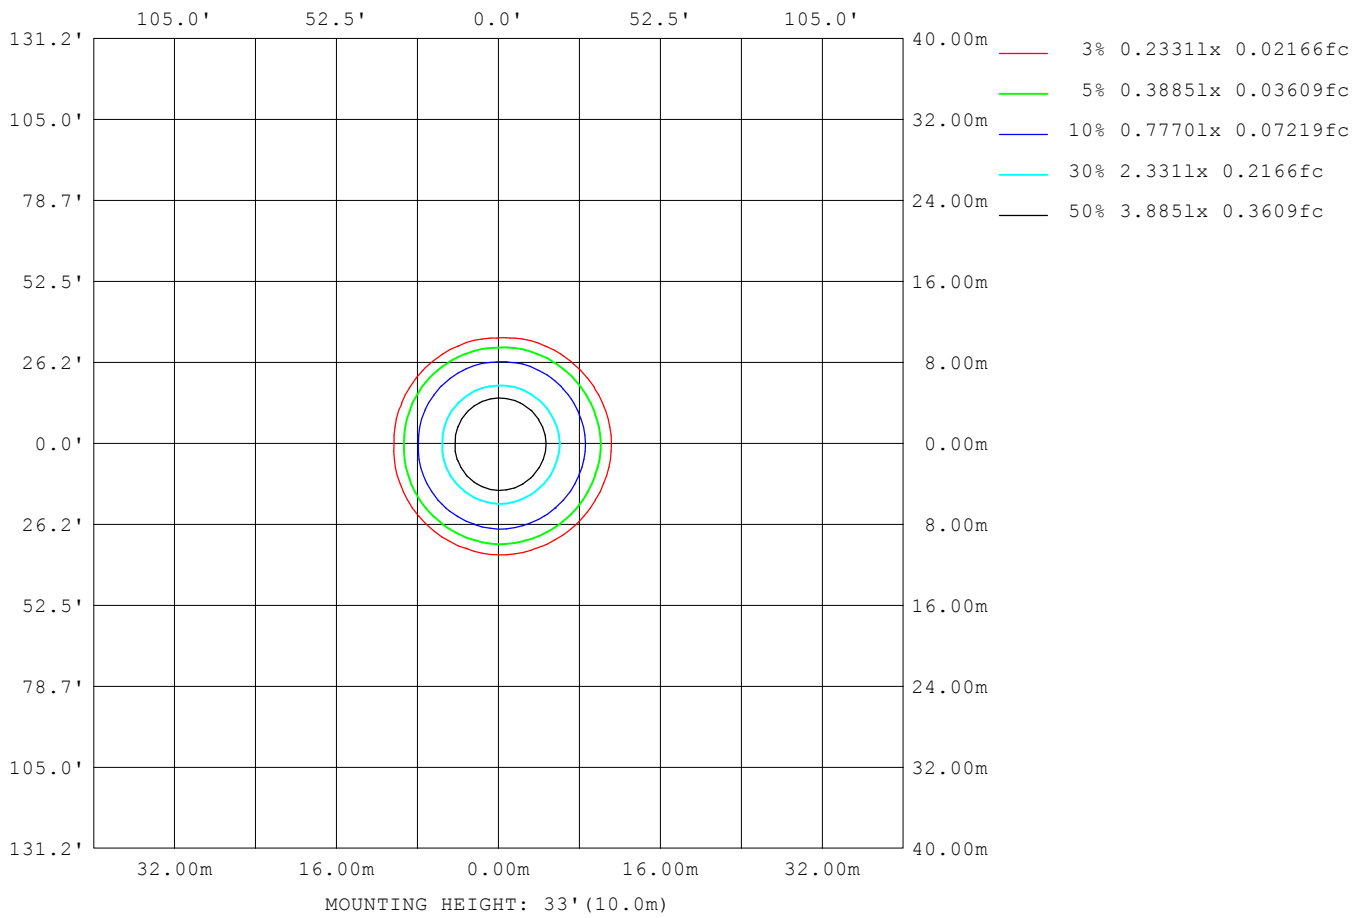

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-01-11

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:230.13V I:0.0454A P:9.0365W PF:0.8428 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:794.993x1 lm		
NAME: CD10W-CC-B 3000K	TYPE: 10W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	21288
L_0~180 (75) av	14001
L_0~180 (85) av	6780
L_90~270 (65) av	21548
L_90~270 (75) av	14562
L_90~270 (85) av	6979
L_45 (65) av	21325
L_45 (75) av	14208
L_45 (85) av	6808

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-01-11

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

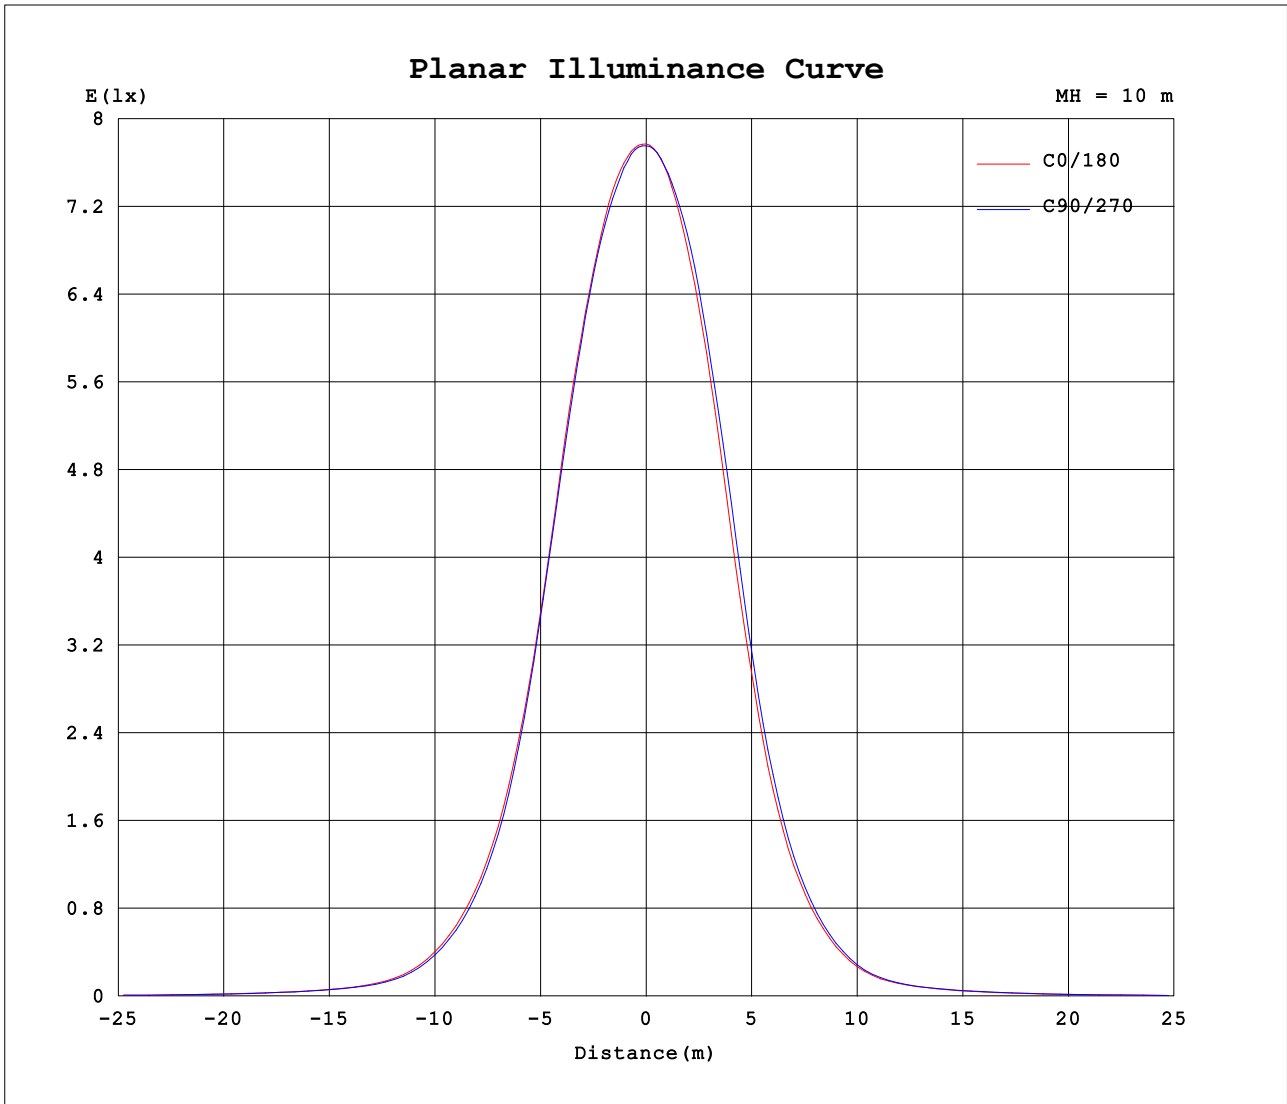

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-01-11

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity: 65.0%  
 Test Distance: 8.690m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.13V I:0.0454A P:9.0365W PF:0.8428 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:794.993x1 lm		
NAME: CD10W-CC-B 3000K	TYPE: 10W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	90	180	270															
0	776	776	776	776															
5	773	771	764	767															
10	756	750	730	743															
15	713	710	674	694															
20	643	635	578	608															
25	528	525	451	484															
30	399	391	323	346															
35	282	270	216	232															
40	189	177	137	146															
45	115	107	76.4	81.3															
50	62.0	57.9	44.9	46.7															
55	39.6	38.2	31.8	33.1															
60	29.1	28.2	23.9	25.2															
65	21.7	21.1	17.9	18.9															
70	15.5	15.1	12.0	13.1															
75	9.28	9.03	6.66	7.55															
80	4.61	4.38	3.03	3.55															
85	1.60	1.52	1.00	1.16															
90	0.09	0.08	0.07	0.08															
95	0.07	0.10	0.10	0.07															
100	0.08	0.13	0.13	0.07															
105	0.11	0.18	0.18	0.10															
110	0.19	0.27	0.27	0.18															
115	0.30	0.39	0.40	0.30															
120	0.47	0.58	0.58	0.48															
125	0.72	0.84	0.84	0.75															
130	1.05	1.18	1.18	1.07															
135	1.44	1.57	1.57	1.46															
140	1.87	1.99	1.98	1.86															
145	2.28	2.42	2.38	2.26															
150	2.70	2.83	2.78	2.65															
155	3.07	3.20	3.12	2.99															
160	3.41	3.54	3.45	3.35															
165	3.75	3.86	3.78	3.68															
170	4.05	4.11	4.08	3.95															
175	4.27	4.32	4.30	4.18															
180	4.39	4.39	4.39	4.32															

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-01-11

□ Range: 0 - 180DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity:65.0%  
 Test Distance:8.690m [K=1.0000]  
 Remarks: