
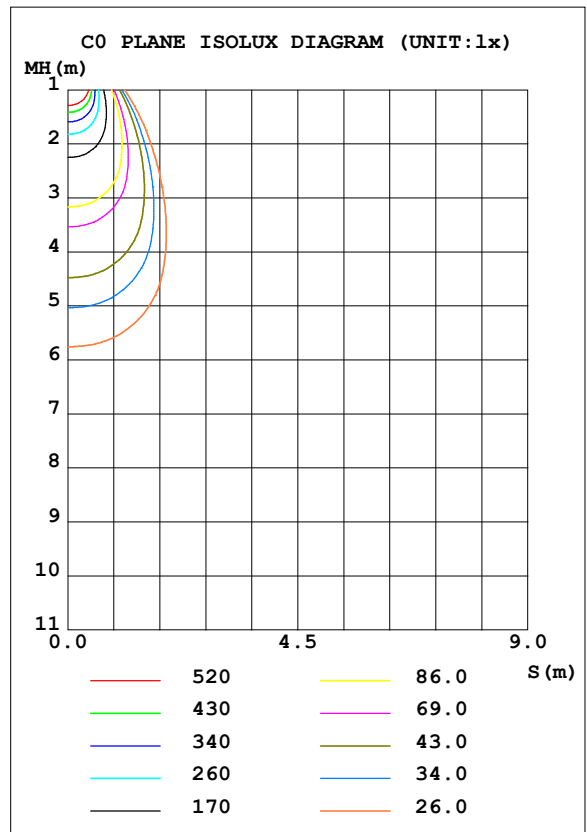


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.11V I:0.0456A P:9.0324W PF:0.8434 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:881.928x1 lm		
NAME: CD10W-CC-B 5000K	TYPE: 10W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 97.64 lm/W			
MODEL	CD10W-CC-B 5000K	I _{max} (cd)	860.4	S/MH (C0/180)	0.85
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	0.87
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	881.93	<input type="checkbox"/> UP, DN (C0-180)	0.4, 52.5
NOMINAL FLUX (lm)	881.928	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.4, 46.7
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.9	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	230.4	<input type="checkbox"/> down (%)	99.1	CIBSE SHR MAX	0.90

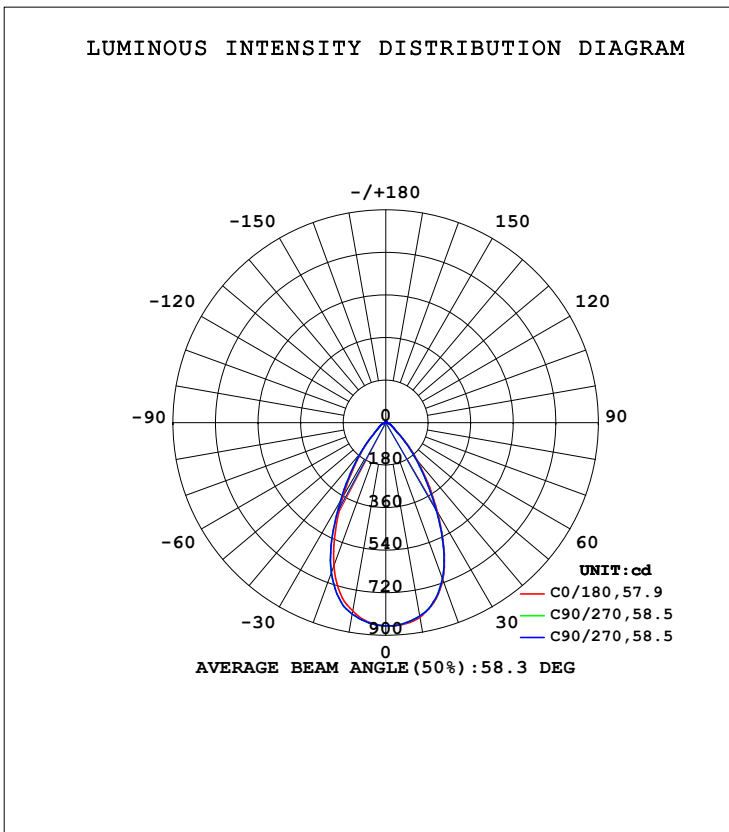

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-01-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 8.690m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C90	C180	C270				mm	□ zone	□ total	%lum, lamp
10	836.0	830.3	809.4	822.3				0- 10	80.44	80.44	9.12,9.12
20	707.6	701.4	642.2	674.1				10- 20	214.8	295.2	33.5,33.5
30	439.3	429.3	364.4	386.3				20- 30	249.7	544.9	61.8,61.8
40	206.3	194.9	156.4	164.6				30- 40	174.9	719.9	81.6,81.6
50	68.04	63.49	51.15	52.62				40- 50	84.14	804.0	91.2,91.2
60	32.13	31.16	27.02	28.20				50- 60	36.64	840.6	95.3,95.3
70	17.07	16.66	13.52	14.73				60- 70	22.01	862.7	97.8,97.8
80	5.064	4.878	3.398	3.995				70- 80	9.884	872.5	98.9,98.9
90	0.0979	0.0855	0.0793	0.0862				80- 90	1.820	874.4	99.1,99.1
100	0.0974	0.1466	0.1400	0.0916				90-100	0.1074	874.5	99.2,99.2
110	0.2128	0.2931	0.2865	0.2071				100-110	0.1803	874.6	99.2,99.2
120	0.5470	0.6408	0.6391	0.5426				110-120	0.3977	875.0	99.2,99.2
130	1.184	1.307	1.292	1.183				120-130	0.7954	875.8	99.3,99.3
140	2.068	2.206	2.161	2.043				130-140	1.287	877.1	99.5,99.5
150	3.005	3.144	3.061	2.927				140-150	1.612	878.7	99.6,99.6
160	3.802	3.924	3.810	3.679				150-160	1.575	880.3	99.8,99.8
170	4.489	4.558	4.503	4.380				160-170	1.169	881.5	99.9,99.9
180	4.855	4.845	4.879	4.784				170-180	0.4428	881.9	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

0 - 45 DEG Zonal Flux:772.04 %lum: 87.5%
 0 - 60 DEG Zonal Flux:840.65 %lum: 95.3%
 All measured values may vary less than 35 %
 from the average measured value in the 0 to 130 deg. zone: 5.9%
 All measured values in the 0 to 130 deg. zone
 may vary less than 50% from the average value of itself: 8.8%

C Range: 0 - 360DEG	□ Range: 0 - 180DEG
C Interval: 90.0DEG	□ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.690m [K=1.0000]
Test Date:2022-01-11	Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.11V I:0.0456A P:9.0324W PF:0.8434 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:881.928x1 lm		
NAME: CD10W-CC-B 5000K	TYPE: 10W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

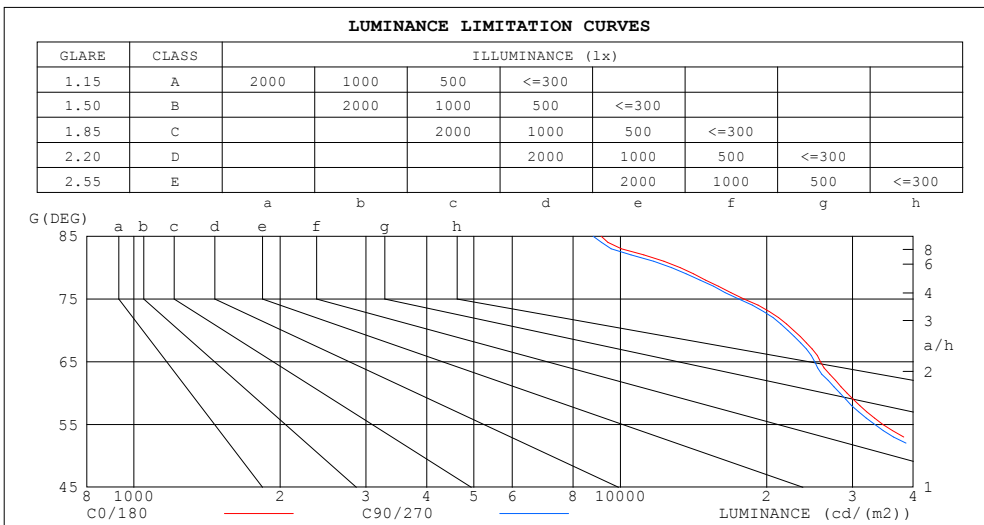

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9144	8804
80	13277	12750
75	17972	17521
70	22718	22105
65	25794	25114
60	29249	28283
55	34685	33361
50	48187	44831
45	81049	74742


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-01-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.11V I:0.0456A P:9.0324W PF:0.8434 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:881.928x1 lm		
NAME: CD10W-CC-B 5000K	TYPE: 10W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.09	1.07	1.04	1.07	1.05	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91
2.0	1.01	.96	.92	.99	.95	.91	.95	.92	.89	.92	.89	.87	.89	.87	.85	.83
3.0	.93	.87	.83	.91	.86	.82	.88	.84	.81	.86	.82	.79	.83	.80	.78	.76
4.0	.86	.80	.75	.85	.79	.75	.82	.77	.74	.80	.76	.73	.78	.75	.72	.70
5.0	.80	.73	.69	.79	.73	.68	.77	.72	.67	.75	.70	.67	.73	.69	.66	.64
6.0	.74	.68	.63	.73	.67	.63	.72	.66	.62	.70	.65	.62	.69	.65	.61	.60
7.0	.69	.63	.58	.69	.63	.58	.67	.62	.58	.66	.61	.57	.65	.60	.57	.55
8.0	.65	.59	.54	.64	.58	.54	.63	.58	.54	.62	.57	.53	.61	.57	.53	.52
9.0	.61	.55	.51	.61	.55	.50	.60	.54	.50	.59	.54	.50	.58	.53	.50	.48
10.0	.58	.51	.47	.57	.51	.47	.56	.51	.47	.55	.50	.47	.55	.50	.47	.45

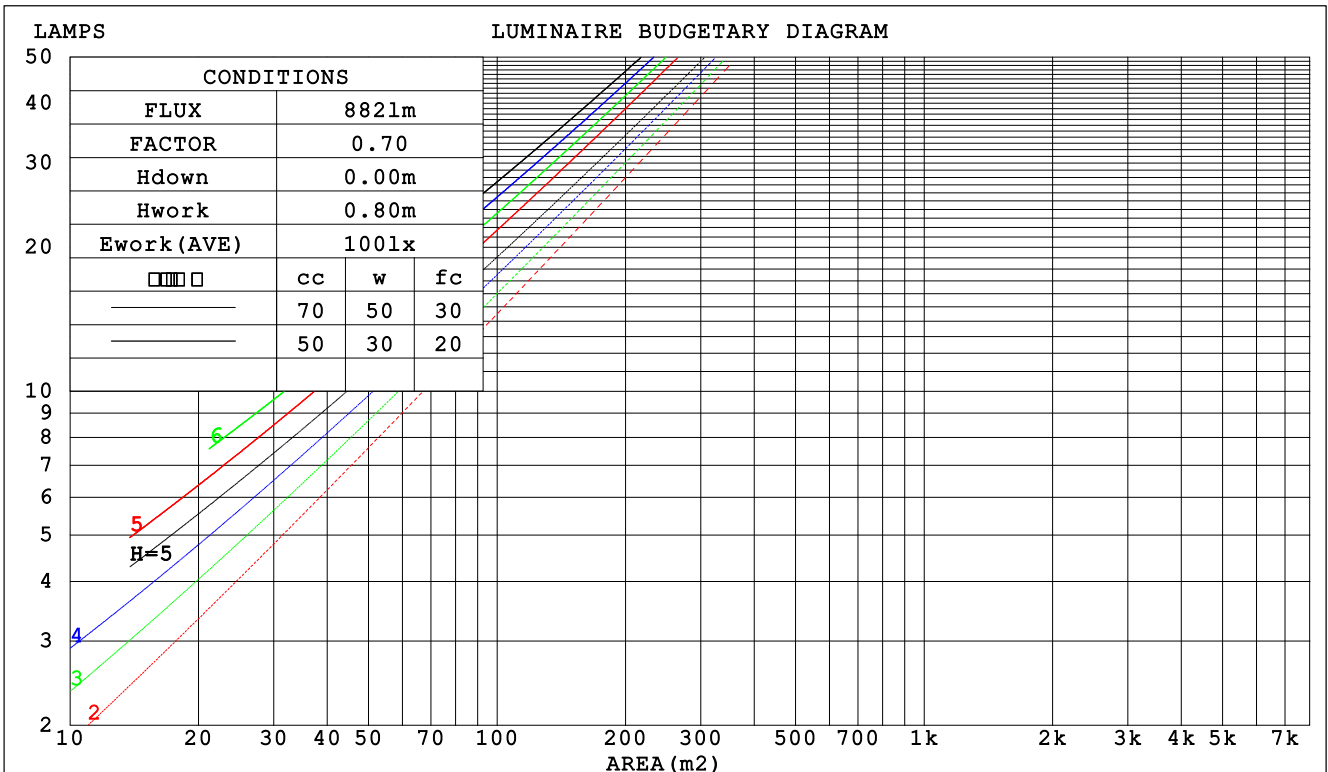

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-01-11

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:230.11V I:0.0456A P:9.0324W PF:0.8434 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:881.928x1 lm		
NAME: CD10W-CC-B 5000K	TYPE: 10W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.201 .114 .036	.194 .111 .035	.181 .104 .033	.168 .097 .031	.157 .091 .029	
2.0	.193 .106 .032	.187 .103 .032	.175 .098 .030	.165 .093 .029	.155 .088 .028	
3.0	.183 .097 .029	.178 .095 .029	.168 .091 .028	.159 .087 .027	.151 .083 .026	
4.0	.173 .090 .026	.169 .088 .026	.160 .085 .025	.152 .082 .025	.145 .079 .024	
5.0	.164 .084 .024	.160 .082 .024	.153 .079 .023	.146 .077 .023	.139 .074 .022	
6.0	.156 .078 .022	.152 .077 .022	.145 .075 .022	.139 .072 .021	.134 .070 .021	
7.0	.148 .073 .021	.145 .072 .021	.139 .070 .020	.133 .068 .020	.128 .067 .020	
8.0	.141 .069 .019	.138 .068 .019	.133 .066 .019	.128 .065 .019	.123 .063 .018	
9.0	.134 .065 .018	.132 .064 .018	.127 .063 .018	.122 .061 .018	.118 .060 .017	
10.0	.128 .061 .017	.126 .061 .017	.121 .059 .017	.117 .058 .017	.114 .057 .016	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.197 .197 .197	.168 .168 .168	.115 .115 .115	.066 .066 .066	.021 .021 .021	
1.0	.179 .164 .150	.153 .140 .129	.105 .097 .089	.060 .056 .052	.019 .018 .017	
2.0	.166 .139 .117	.142 .120 .101	.097 .083 .070	.056 .048 .041	.018 .016 .013	
3.0	.154 .120 .093	.132 .104 .081	.091 .072 .057	.052 .042 .033	.017 .014 .011	
4.0	.145 .106 .076	.124 .092 .066	.085 .064 .047	.049 .037 .028	.016 .012 .009	
5.0	.137 .095 .064	.117 .082 .055	.081 .057 .039	.047 .034 .023	.015 .011 .008	
6.0	.129 .086 .054	.111 .074 .047	.077 .052 .033	.044 .031 .020	.014 .010 .007	
7.0	.123 .078 .047	.106 .068 .041	.073 .048 .029	.042 .028 .017	.014 .009 .006	
8.0	.117 .072 .041	.101 .063 .036	.070 .044 .025	.041 .026 .015	.013 .008 .005	
9.0	.112 .067 .037	.096 .058 .032	.067 .041 .023	.039 .024 .014	.013 .008 .004	
10.0	.107 .063 .033	.092 .054 .029	.064 .038 .021	.037 .023 .012	.012 .007 .004	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-01-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.11V I:0.0456A P:9.0324W PF:0.8434 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:881.928x1 lm		
NAME: CD10W-CC-B 5000K	TYPE: 10W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.4	25.5	24.6	25.6	25.8	24.2	25.3	24.4	25.4	25.6
3H	24.7	25.7	25.0	25.9	26.1	24.5	25.5	24.8	25.7	25.9
4H	24.8	25.7	25.1	26.0	26.2	24.6	25.5	24.9	25.8	26.0
6H	24.8	25.7	25.1	25.9	26.2	24.6	25.5	24.9	25.7	26.0
8H	24.8	25.6	25.1	25.9	26.2	24.6	25.4	24.9	25.7	26.0
12H	24.8	25.6	25.1	25.8	26.1	24.6	25.4	24.9	25.7	26.0
4H 2H	24.4	25.3	24.7	25.6	25.8	24.2	25.1	24.5	25.4	25.6
3H	24.8	25.6	25.2	25.9	26.2	24.7	25.5	25.0	25.7	26.0
4H	25.0	25.7	25.4	26.0	26.4	24.8	25.5	25.2	25.9	26.2
6H	25.1	25.7	25.5	26.1	26.4	24.9	25.5	25.3	25.9	26.3
8H	25.1	25.7	25.5	26.0	26.4	24.9	25.5	25.3	25.9	26.2
12H	25.1	25.6	25.5	26.0	26.4	24.9	25.4	25.3	25.8	26.2
8H 4H	25.0	25.6	25.4	25.9	26.3	24.8	25.4	25.2	25.8	26.2
6H	25.1	25.6	25.6	26.0	26.4	24.9	25.4	25.4	25.8	26.3
8H	25.1	25.6	25.6	26.0	26.4	25.0	25.4	25.4	25.8	26.3
12H	25.1	25.5	25.6	25.9	26.4	25.0	25.3	25.4	25.8	26.3
12H 4H	25.0	25.5	25.4	25.9	26.3	24.8	25.3	25.2	25.7	26.1
6H	25.1	25.5	25.5	25.9	26.4	24.9	25.3	25.4	25.8	26.2
8H	25.1	25.5	25.6	25.9	26.4	24.9	25.3	25.4	25.8	26.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.4 / - 2.1					+ 1.3 / - 2.1				
1.5H	+ 2.5 / - 2.0					+ 2.4 / - 1.9				
2.0H	+ 3.0 / - 1.4					+ 2.7 / - 1.3				

CIE Pub.117, 881.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.4)
Area: 0.0022 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-01-11

Range: 0 - 180DEG
 Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.11V I:0.0456A P:9.0324W PF:0.8434 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:881.928x1 lm		
NAME: CD10W-CC-B 5000K	TYPE: 10W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	80	72	68	79	72	68	79	72	68	63
0.80	88	81	77	88	81	76	86	80	76	72
1.00	94	87	83	93	87	82	91	87	82	77
1.25	99	92	88	98	92	88	95	90	87	82
1.50	102	96	92	101	95	92	98	94	90	85
2.00	106	101	97	104	99	96	101	97	94	88
2.50	108	103	100	106	102	99	103	99	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	105	106	104	102	94
5.00	114	111	108	111	109	107	107	105	104	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-01-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.11V I:0.0456A P:9.0324W PF:0.8434 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:881.928x1 lm		
NAME: CD10W-CC-B 5000K	TYPE: 10W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

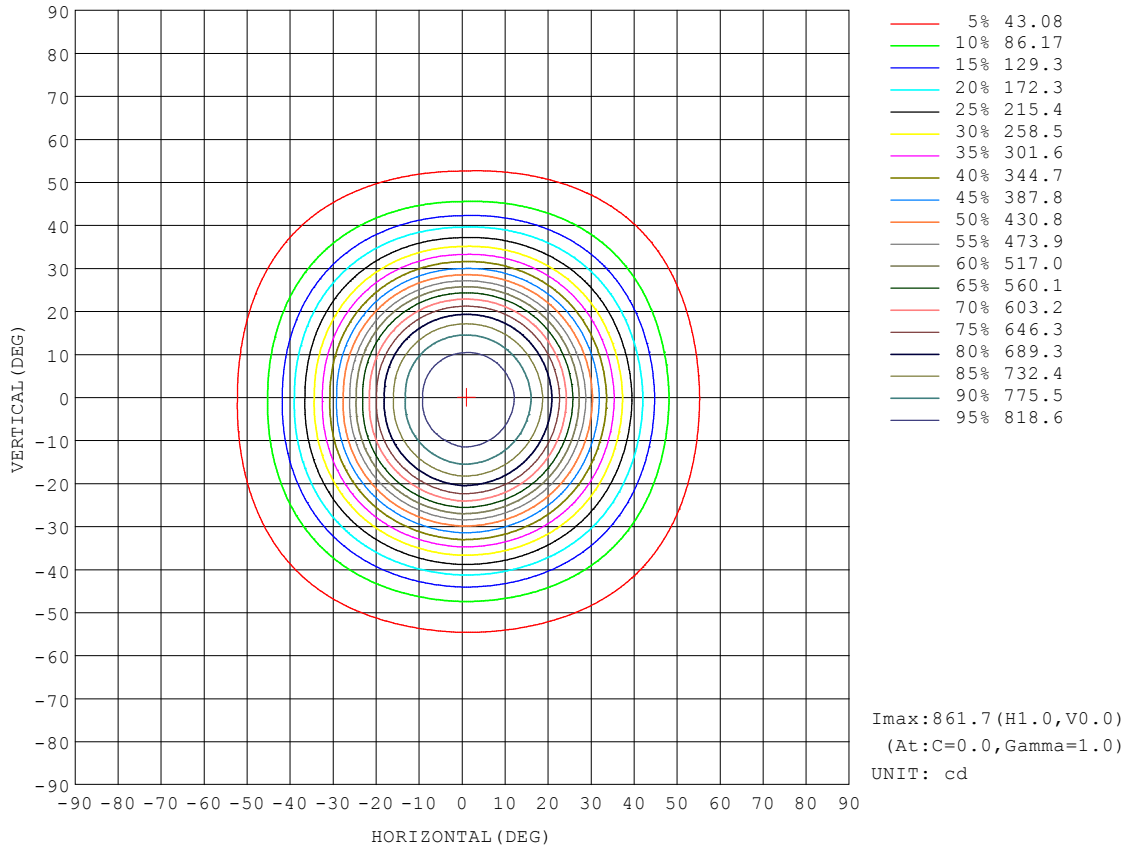


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-01-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

AAI Figure

Test:U:230.11V I:0.0456A P:9.0324W PF:0.8434 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:881.928x1 lm		
NAME: CD10W-CC-B 5000K	TYPE: 10W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

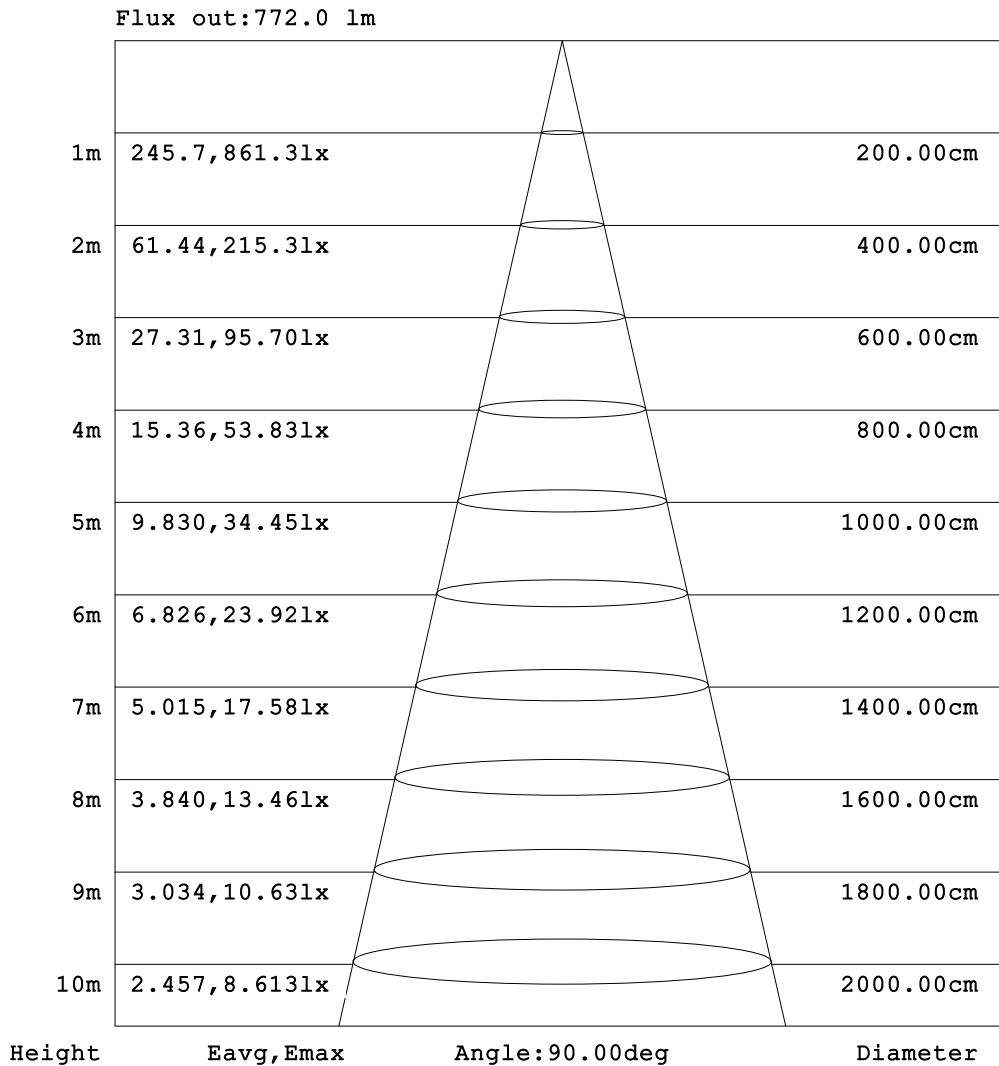


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-01-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:230.11V I:0.0456A P:9.0324W PF:0.8434 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:881.928x1 lm		
NAME: CD10W-CC-B 5000K	TYPE: 10W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

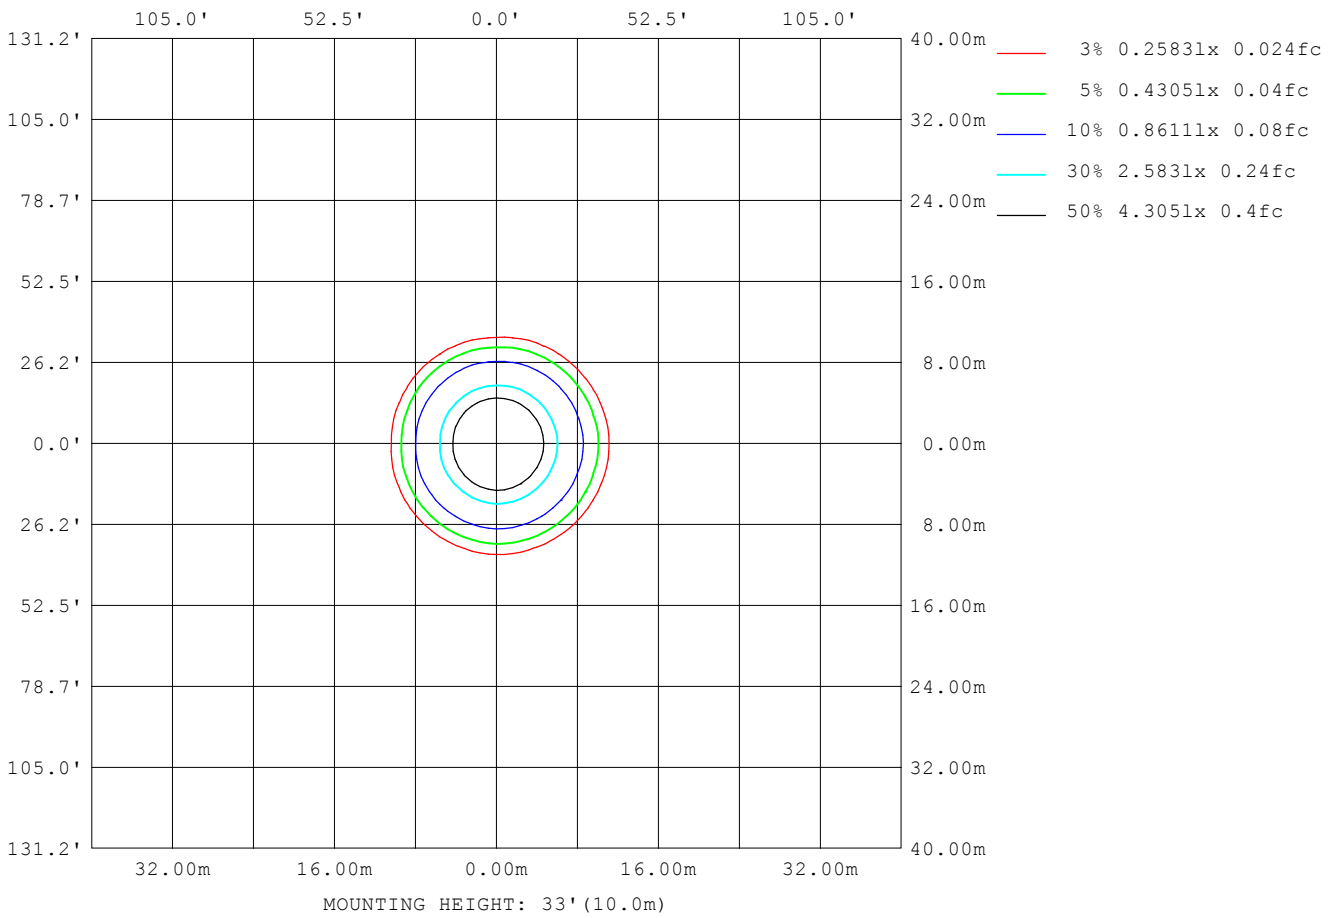

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-01-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:230.11V I:0.0456A P:9.0324W PF:0.8434 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:881.928x1 lm		
NAME: CD10W-CC-B 5000K	TYPE: 10W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	23735
L_0~180 (75) av	15602
L_0~180 (85) av	7563
L_90~270 (65) av	23983
L_90~270 (75) av	16180
L_90~270 (85) av	7820
L_45 (65) av	23763
L_45 (75) av	15817
L_45 (85) av	7626

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-01-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

Planar Illuminance Curve

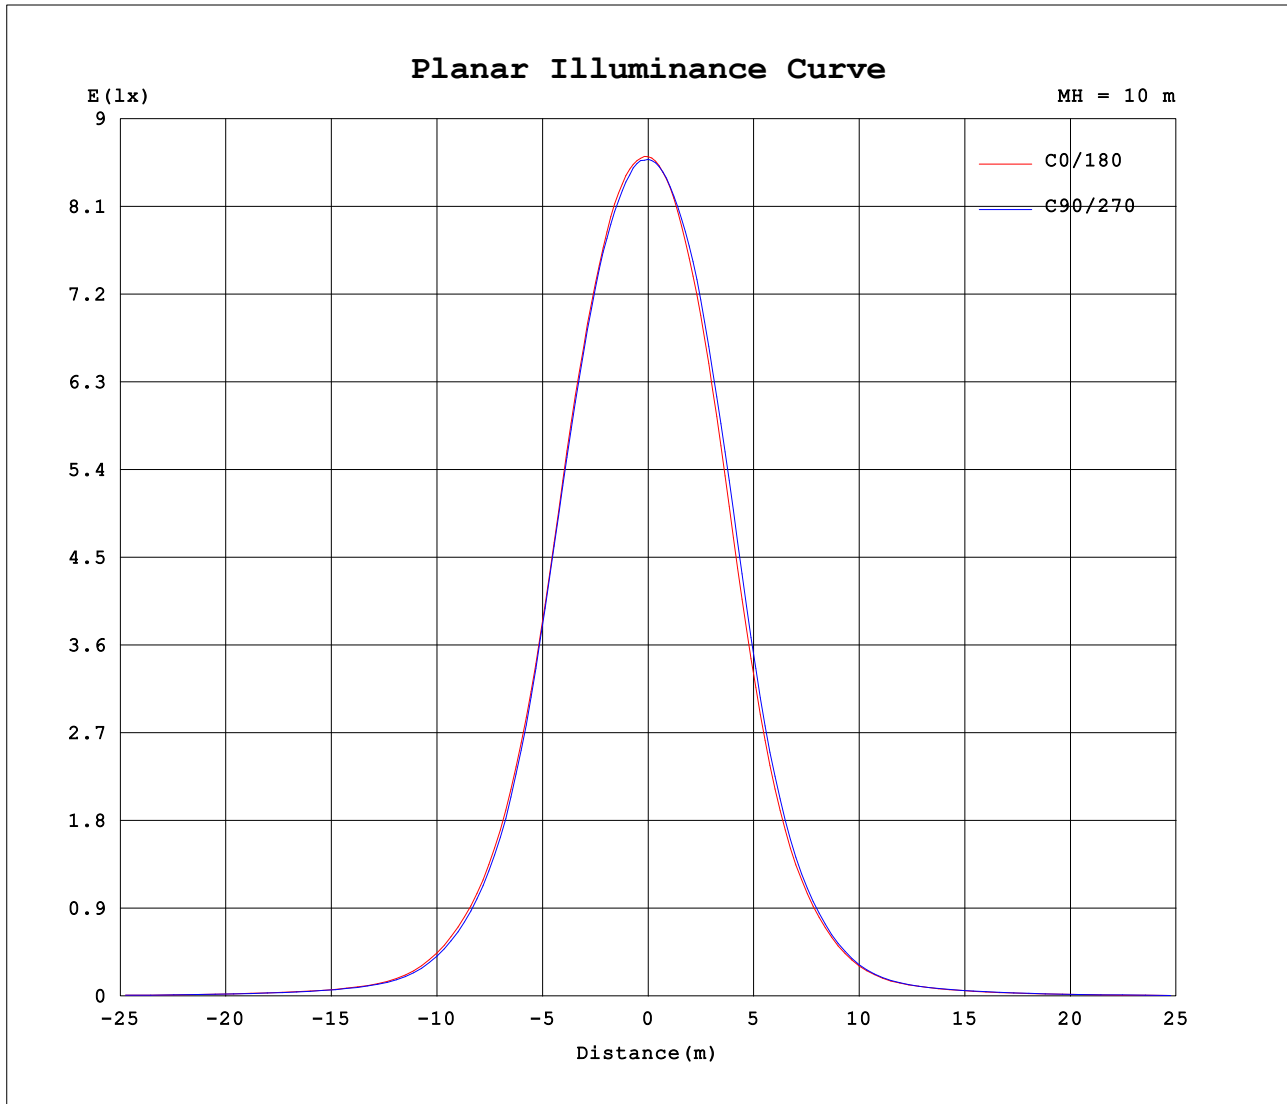

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-01-11

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 8.690m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.11V I:0.0456A P:9.0324W PF:0.8434 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:881.928x1 lm		
NAME: CD10W-CC-B 5000K	TYPE: 10W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.0022	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	90	180	270															
0	860	860	860	860															
5	857	854	846	850															
10	836	830	809	822															
15	788	784	747	769															
20	708	701	642	674															
25	581	579	505	538															
30	439	429	364	386															
35	310	297	245	260															
40	206	195	156	165															
45	126	116	88.1	92.1															
50	68.0	63.5	51.2	52.6															
55	43.7	42.2	35.9	37.1															
60	32.1	31.2	27.0	28.2															
65	23.9	23.4	20.2	21.2															
70	17.1	16.7	13.5	14.7															
75	10.2	9.99	7.55	8.43															
80	5.06	4.88	3.40	3.99															
85	1.75	1.69	1.15	1.31															
90	0.10	0.09	0.08	0.09															
95	0.09	0.11	0.10	0.08															
100	0.10	0.15	0.14	0.09															
105	0.13	0.20	0.20	0.13															
110	0.21	0.29	0.29	0.21															
115	0.36	0.43	0.43	0.35															
120	0.55	0.64	0.64	0.54															
125	0.83	0.94	0.93	0.82															
130	1.18	1.31	1.29	1.18															
135	1.62	1.74	1.72	1.60															
140	2.07	2.21	2.16	2.04															
145	2.54	2.69	2.62	2.51															
150	3.01	3.14	3.06	2.93															
155	3.42	3.55	3.44	3.31															
160	3.80	3.92	3.81	3.68															
165	4.17	4.27	4.17	4.07															
170	4.49	4.56	4.50	4.38															
175	4.73	4.77	4.75	4.62															
180	4.85	4.85	4.88	4.78															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-01-11

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks: