



POWER-LITE®

Certainty at The Speed of Light



LED-FL480W



LED-FL720W



LED-FL960W

LED STADIUM

FLOOD LIGHT

LED-FL

Utilising the POWER-LITE® LED Flood Light provides many benefits in addition to the substantial costs savings achieved through our LED technology. Our LED Flood Lights tackle the usual challenges faced with providing a lighting solution, including the elimination of UV therefore insects will not be attracted to this light. There is no warm up process, the light is immediate and reaches full output upon the flick of a switch. The IP65 rating and high quality powder coating provides a durable and safe solution, protecting the product against rust and water penetration, meaning no maintenance is required.



APPLICATIONS

Warehouses
Petrol Stations
Stadiums
Commercial
Industrial



1800 909 306



nedlandsgroup.com.au



sales@nedlandsgroup.com.au





POWER-LITE®

Certainty at The Speed of Light

DIMENSIONS

(L x W x D mm)

LED-FL480W	579.4 x 442 x 201
LED-FL720W	833.4 x 442 x 201
LED-FL960W	1079.4 x 442 x 200

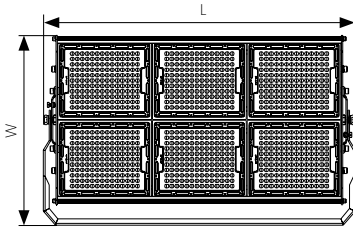

LED Chip
Philips SMD 3030

Lens
PC Lens

Working Temp
-40°C to +50°C

Power Factor
>0.95

Lifespan
50,000hrs

Efficacy
Up to 125lm/W

LED Driver
Meanwell
Non-dimmable

Connection
1m Power Cable














Material
Aluminium

Carton Qty
1

 5700K

 AC100-277V

 Black

PRODUCT	SPECIFICATIONS		CODE
LED STADIUM FLOOD LIGHT	 480W	 Net Weight 19kg	LED-FL480W
	 62,400lm	 Replaces 1000W	
	 720W	 Net Weight 30kg	LED-FL720W
	 93,600lm	 Replaces 1500W	
	 960W	 Net Weight 36kg	LED-FL960W
	 124,800lm	 Replaces 2000W	
	 4 Amps		

 IP66

 IK10

 60 x 100°
Beam Angle




POWER-LITE®


Certainty at The Speed of Light

PHOTOMETRICS

LED-FL480W | 5700K

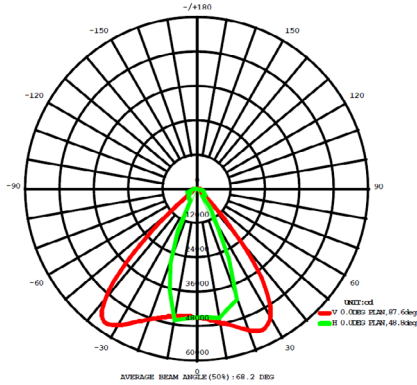

LED-FL720W | 5700K

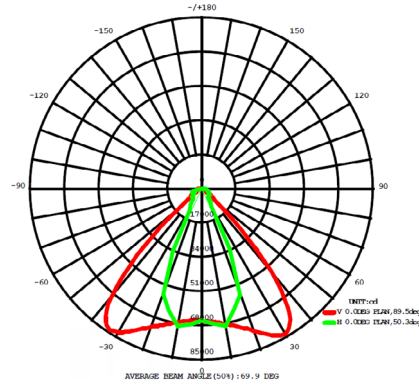

LED-FL960W | 5700K

