



POWER-LITE®

Certainty at The Speed of Light



LED WEATHERPROOF

BATTEN

WP

The POWER-LITE® LED Weatherproof Batten, comes with many benefits including its robust and sleek design, easy mounting clips and rear terminal access making installation effortless. It is vandal resistant which is ideal for applications where a higher level of impact protection is required.



APPLICATIONS

Commercial

Industrial



POWER-LITE®

Certainty at The Speed of Light

DIMENSIONS


(L x W x H mm)

WP18W

600 x 95 x 80

WP36W

1200 x 95 x 80

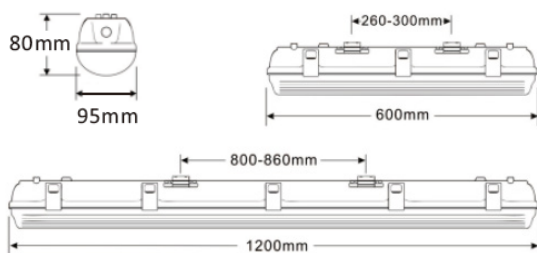

LED Chip

Sanan Chip

CRI

>80

Life Expectancy

50,000hrs L80

Efficacy

Up to 90lm/W

SCDM

<5 Macadam steps

LED Driver

Flicker-Free

Non-dimmable

Working Temp.

-20°C to +45°C

Emergency Duration

180 mins

Power Factor

0.95

Emergency Mode

Maintained

Carton Qty

9


















18W
36W



6000K



AC220-240V
50/60Hz

PRODUCT OPTIONS	SPECIFICATIONS	CODE
18W LED BATTEN STANDARD	 6000K 2250lm	WP18W-CW
18W LED BATTEN EMERGENCY	 6000K 2250lm  EM Mode 400-500lm  EM Watt Output 2W  EM Classification C0:D32, C90:D40	WP18W-CW-E
36W LED BATTEN STANDARD	 6000K 4500lm	WP36W-CW
36W LED BATTEN EMERGENCY	 6000K 4500lm  EM Mode 400-500lm  EM Watt Output 2W  EM Classification C0:D50, C90:D25	WP36W-CW-E
36W LED BATTEN MOTION SENSOR	 6000K 4500lm	WP36W-CW-MS
36W LED BATTEN MOTION SENSOR & EMERGENCY	 6000K 4500lm  EM Mode 400-500lm  EM Watt Output 2W  EM Classification C0:D50, C90:D25	WP36W-CW-E-MS



IP65



IK10






POWER-LITE®


Certainty at The Speed of Light

PHOTOMETRICS

WP18W-CW / E | 6000K

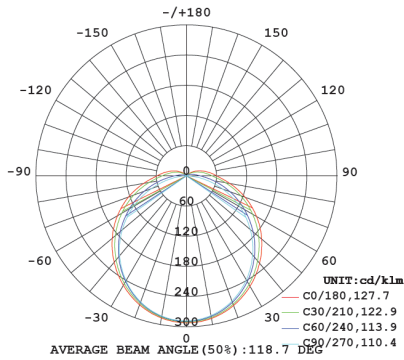

WP36W-CW-E | 6000K

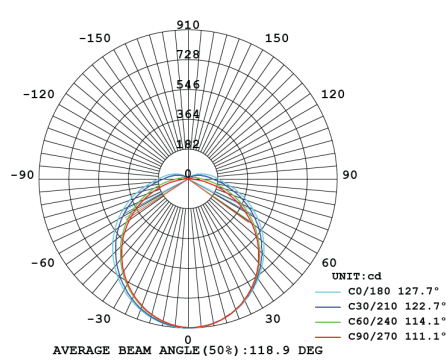

WP36W-CW-MS / E-MS | 6000K

