
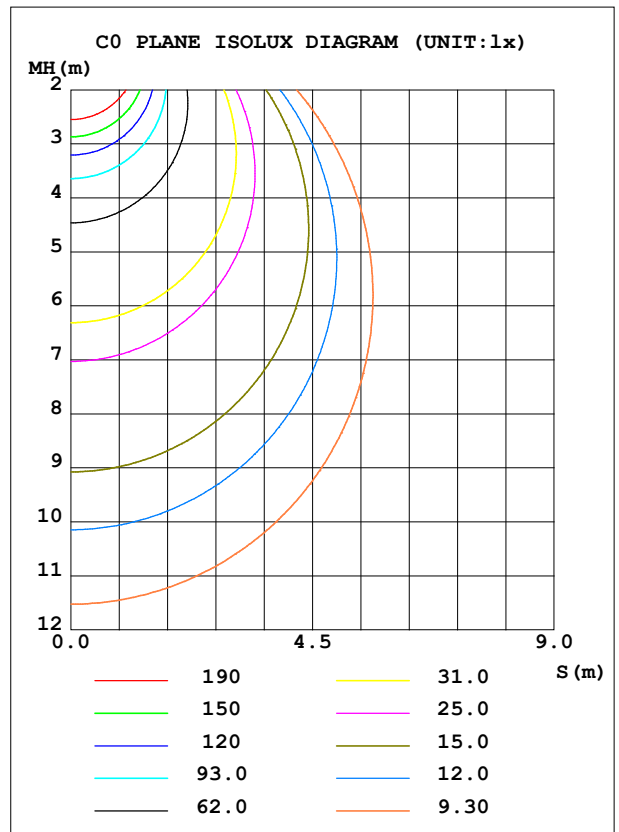


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME :	TYPE :	WEIGHT :
SPEC. :	DIM. :	SERIAL No. :
MFR. :	SUR. :	Shielding Angle :

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	1237	S/MH (C0/180)	1.27
NOMINAL POWER (W)	28.74W	LOR (%)	100.0	S/MH (C90/270)	1.31
RATED VOLTAGE (V)	28.74W	TOTAL FLUX (lm)	3615.2	η UP, DN (C0-180)	0.0, 48.2
NOMINAL FLUX (lm)	3615.2	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 51.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	100.0	CIBSE SHR MAX	1.35

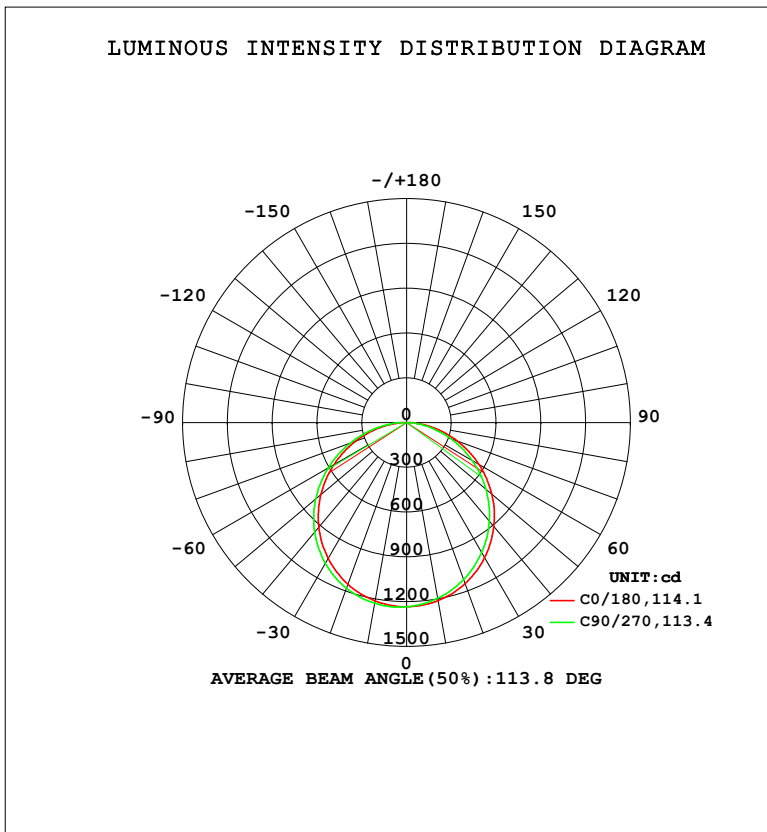

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-03-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 8.420m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum,lamp
10	1211	1196	1214	1229					0- 10	116.8	116.8	3.23,3.23
20	1148	1119	1152	1181					10- 20	334.8	451.6	12.5,12.5
30	1046	1006	1051	1089					20- 30	508.6	960.2	26.6,26.6
40	909.9	862.6	915.7	959.3					30- 40	615.5	1576	43.6,43.6
50	745.0	693.8	749.8	795.5					40- 50	641.8	2217	61.3,61.3
60	559.1	507.2	561.5	605.7					50- 60	584.7	2802	77.5,77.5
70	361.1	313.1	362.3	401.0					60- 70	454.5	3257	90.1,90.1
80	165.6	126.5	165.8	199.3					70- 80	275.0	3532	97.7,97.7
90	1.015	0.6912	0.8158	19.26					80- 90	83.59	3615	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-03-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:8.420m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINANCE LIMITATION CURVES

NAME :	TYPE :	WEIGHT :
SPEC. :	DIM. :	SERIAL No. :
MFR. :	SUR. :	Shielding Angle :

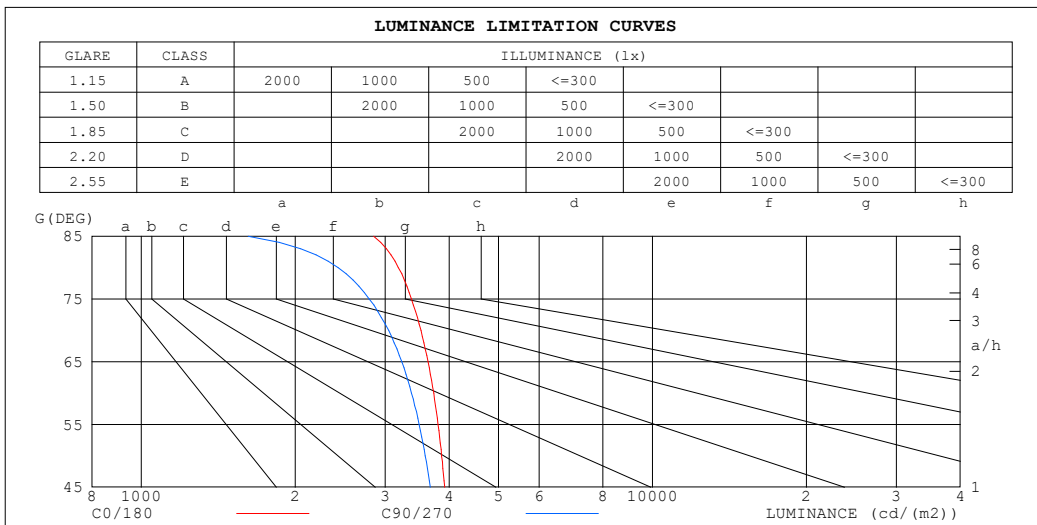

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2847	1618
80	3182	2425
75	3377	2791
70	3523	3047
65	3638	3232
60	3732	3377
55	3807	3495
50	3868	3594
45	3920	3677

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-03-09


γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 8.420m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME :	TYPE :	WEIGHT :
SPEC. :	DIM. :	SERIAL No. :
MFR. :	SUR. :	Shielding Angle :

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.03	.99	.95	1.01	.97	.93	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.53	.66	.58	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.35	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

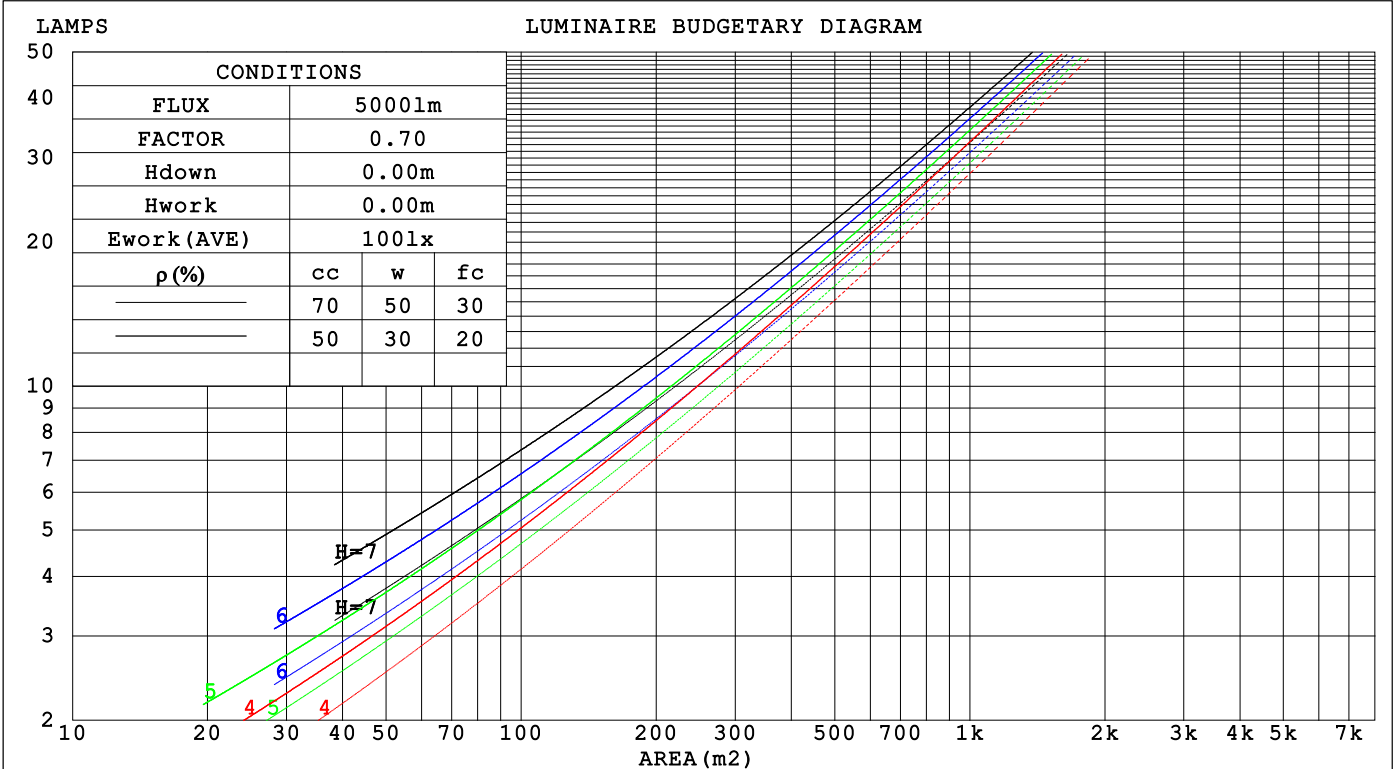

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-03-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 8.420m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

WEC AND CCEC

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.318	.181	.057	.311	.177	.056	.298	.171	.055	.286	.165	.053	.274	.159	.051	
2.0	.297	.163	.050	.291	.160	.049	.279	.155	.048	.269	.151	.047	.259	.146	.046	
3.0	.274	.146	.044	.269	.144	.043	.258	.140	.043	.249	.136	.042	.240	.133	.041	
4.0	.252	.131	.039	.247	.129	.038	.238	.126	.038	.230	.123	.037	.222	.120	.037	
5.0	.233	.119	.034	.228	.117	.034	.220	.115	.034	.213	.112	.033	.206	.110	.033	
6.0	.216	.108	.031	.212	.107	.031	.204	.105	.030	.198	.103	.030	.191	.101	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.095	.028	.179	.093	.027	
8.0	.187	.091	.026	.184	.091	.026	.178	.089	.025	.173	.087	.025	.168	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.083	.023	.162	.081	.023	.158	.080	.023	
10.0	.165	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.149	.075	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.156	.134	.155	.134	.115	.106	.092	.080	.061	.053	.046	.020	.017	.015	
2.0	.173	.132	.097	.148	.114	.084	.102	.079	.059	.059	.046	.034	.019	.015	.011	
3.0	.165	.114	.074	.142	.099	.064	.097	.069	.045	.056	.040	.026	.018	.013	.009	
4.0	.158	.101	.058	.135	.087	.050	.093	.061	.035	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.051	.032	.017	.017	.011	.006	
6.0	.143	.082	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.015	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.074	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.118	.060	.022	.101	.052	.019	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:
 Test Date:2023-03-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:8.420m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UGR(Unified Glare Rating) Table

NAME:	TYPE:					WEIGHT:				
SPEC.:	DIM.:					SERIAL No.:				
MFR.:	SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.4	18.9	17.7	19.2	19.4	17.1	18.6	17.3	18.8	19.0
3H	19.0	20.5	19.3	20.7	20.9	18.5	20.0	18.8	20.2	20.4
4H	19.7	21.1	20.0	21.3	21.6	19.1	20.5	19.4	20.7	21.0
6H	20.2	21.5	20.6	21.8	22.1	19.5	20.8	19.8	21.1	21.3
8H	20.4	21.6	20.8	21.9	22.2	19.6	20.8	20.0	21.1	21.4
12H	20.5	21.7	20.9	22.0	22.3	19.6	20.8	20.0	21.1	21.4
4H 2H	18.0	19.3	18.3	19.6	19.9	17.7	19.1	18.0	19.3	19.6
3H	19.8	21.0	20.1	21.3	21.6	19.4	20.6	19.7	20.9	21.2
4H	20.6	21.7	21.0	22.0	22.3	20.1	21.2	20.5	21.5	21.8
6H	21.3	22.2	21.7	22.6	22.9	20.6	21.6	21.0	21.9	22.3
8H	21.5	22.4	21.9	22.8	23.2	20.8	21.7	21.2	22.0	22.4
12H	21.7	22.5	22.1	22.9	23.3	20.8	21.7	21.3	22.1	22.5
8H 4H	20.9	21.8	21.3	22.1	22.5	20.4	21.3	20.8	21.7	22.1
6H	21.7	22.4	22.1	22.8	23.2	21.1	21.8	21.5	22.2	22.7
8H	22.0	22.7	22.5	23.1	23.5	21.3	22.0	21.8	22.4	22.9
12H	22.2	22.8	22.7	23.3	23.7	21.4	22.0	21.9	22.5	22.9
12H 4H	20.9	21.7	21.3	22.1	22.5	20.4	21.2	20.8	21.6	22.0
6H	21.7	22.4	22.2	22.8	23.3	21.1	21.8	21.6	22.2	22.7
8H	22.1	22.7	22.6	23.1	23.6	21.4	22.0	21.9	22.4	22.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				

CIE Pub.117, 3615 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.5)
 Area: 0.3 m2

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-03-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:8.420m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UTILIZATION FACTORS TABLE

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	45	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	49
1.25	82	72	64	81	71	64	78	70	63	56
1.50	87	77	70	86	76	70	83	75	69	61
2.00	94	86	79	93	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-03-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 8.420m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM

NAME :	TYPE :	WEIGHT :
SPEC. :	DIM. :	SERIAL No. :
MFR. :	SUR. :	Shielding Angle :

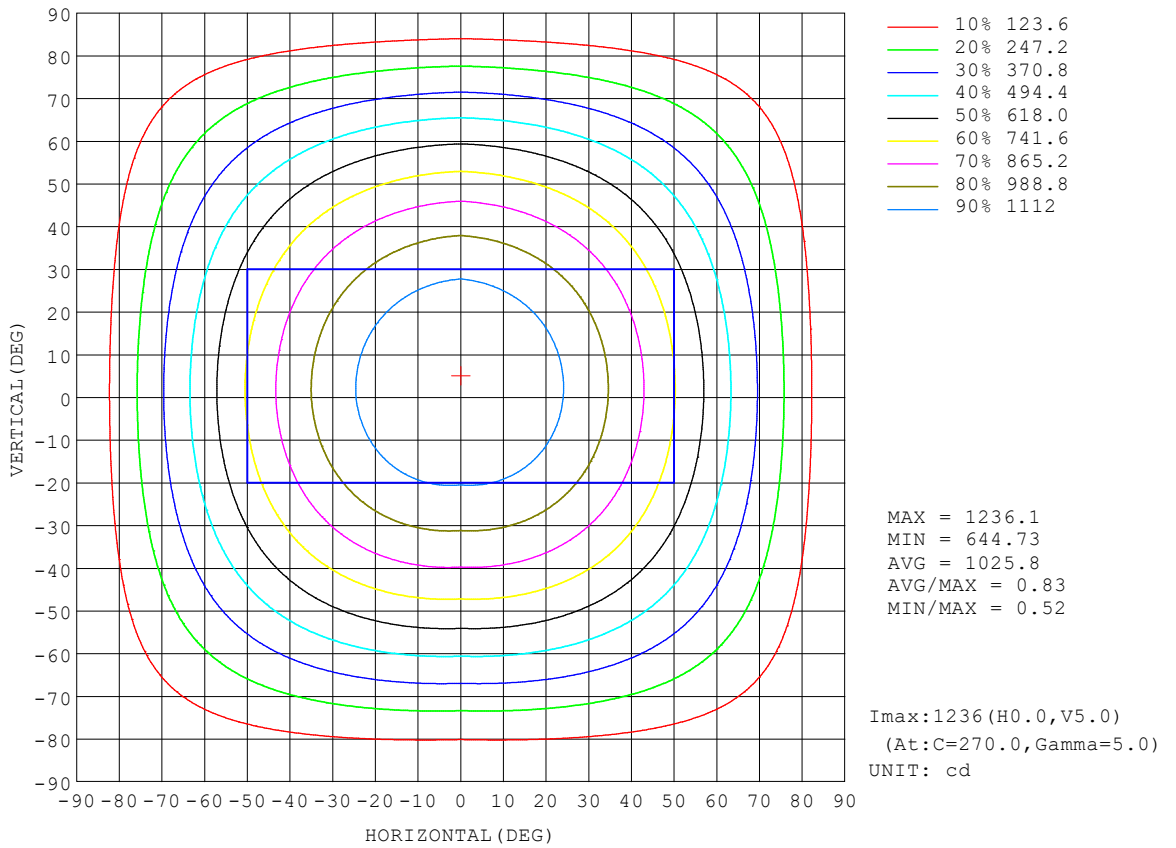

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-03-09


γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:8.420m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

AAI Figure

NAME :	TYPE :	WEIGHT :
SPEC. :	DIM. :	SERIAL No. :
MFR. :	SUR. :	Shielding Angle :

Flux out:2637 lm

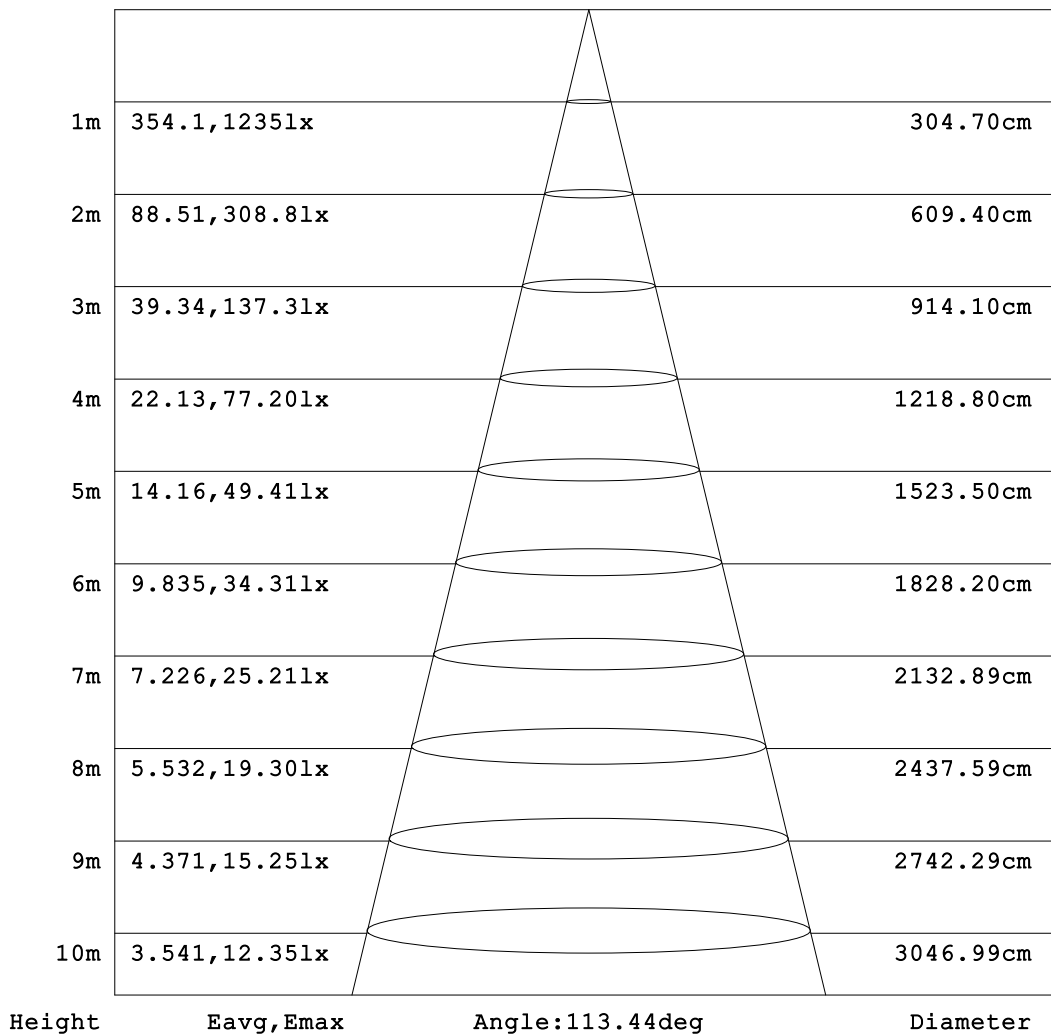

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-03-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 8.420m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOLUX DIAGRAM

NAME :	TYPE :	WEIGHT :
SPEC. :	DIM. :	SERIAL No. :
MFR. :	SUR. :	Shielding Angle :

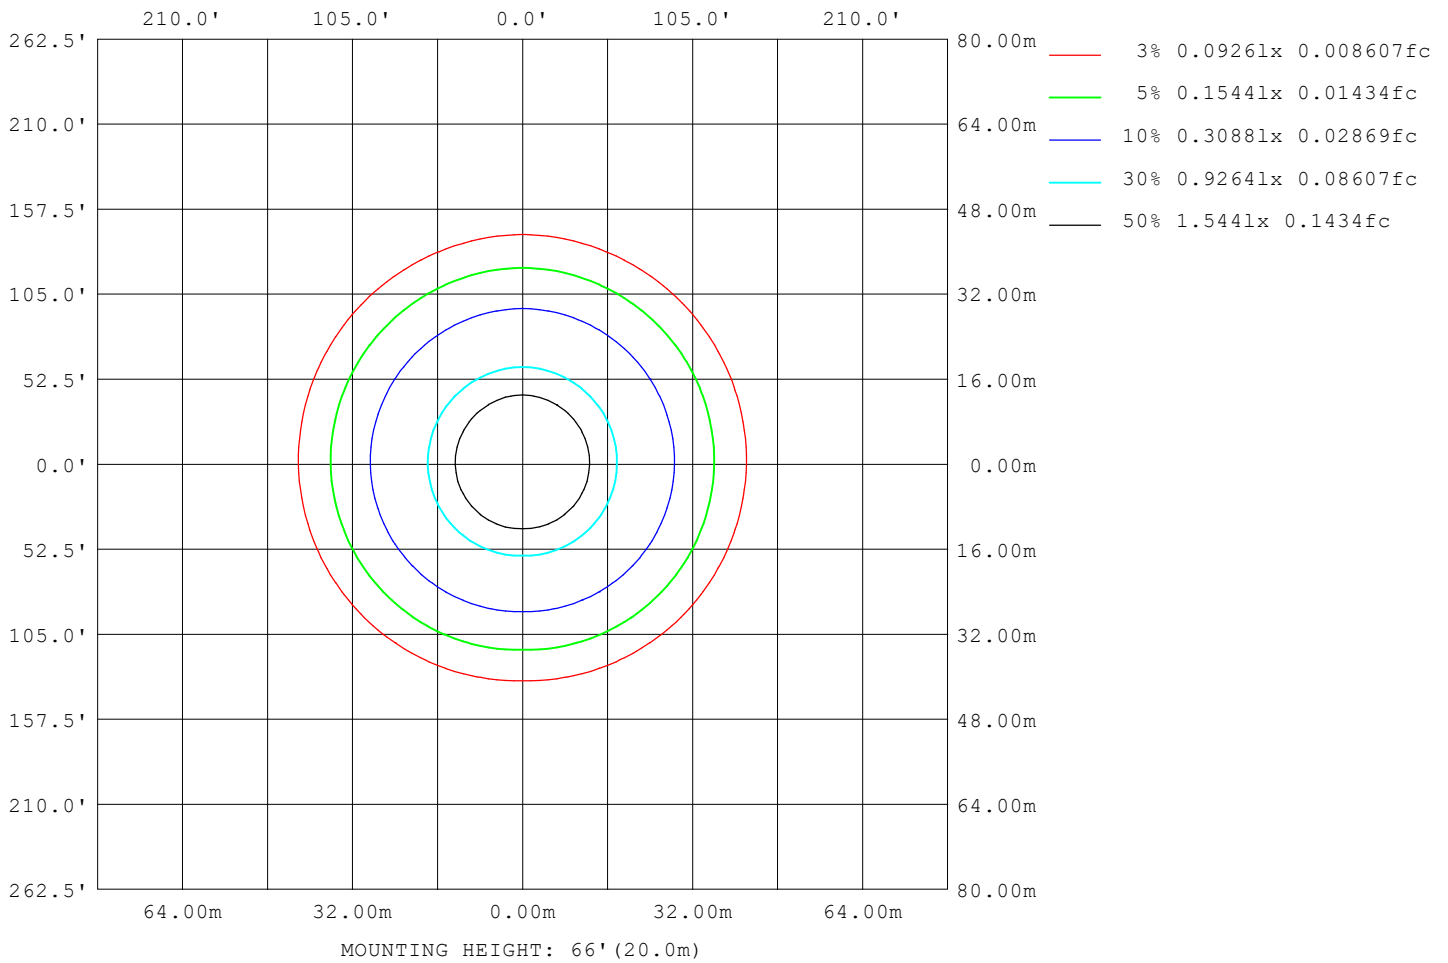

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-03-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 8.420m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME :	TYPE :	WEIGHT :
SPEC. :	DIM. :	SERIAL No. :
MFR. :	SUR. :	Shielding Angle :


AvgL	cd/m2
L_0~180 (65) av	3641
L_0~180 (75) av	3376
L_0~180 (85) av	2844
L_90~270 (65) av	3607
L_90~270 (75) av	3320
L_90~270 (85) av	2822
L_45 (65) av	3621
L_45 (75) av	3341
L_45 (85) av	2830

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2023-03-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:8.420m [K=1.0000]
 Remarks:

Planar Illuminance Curve

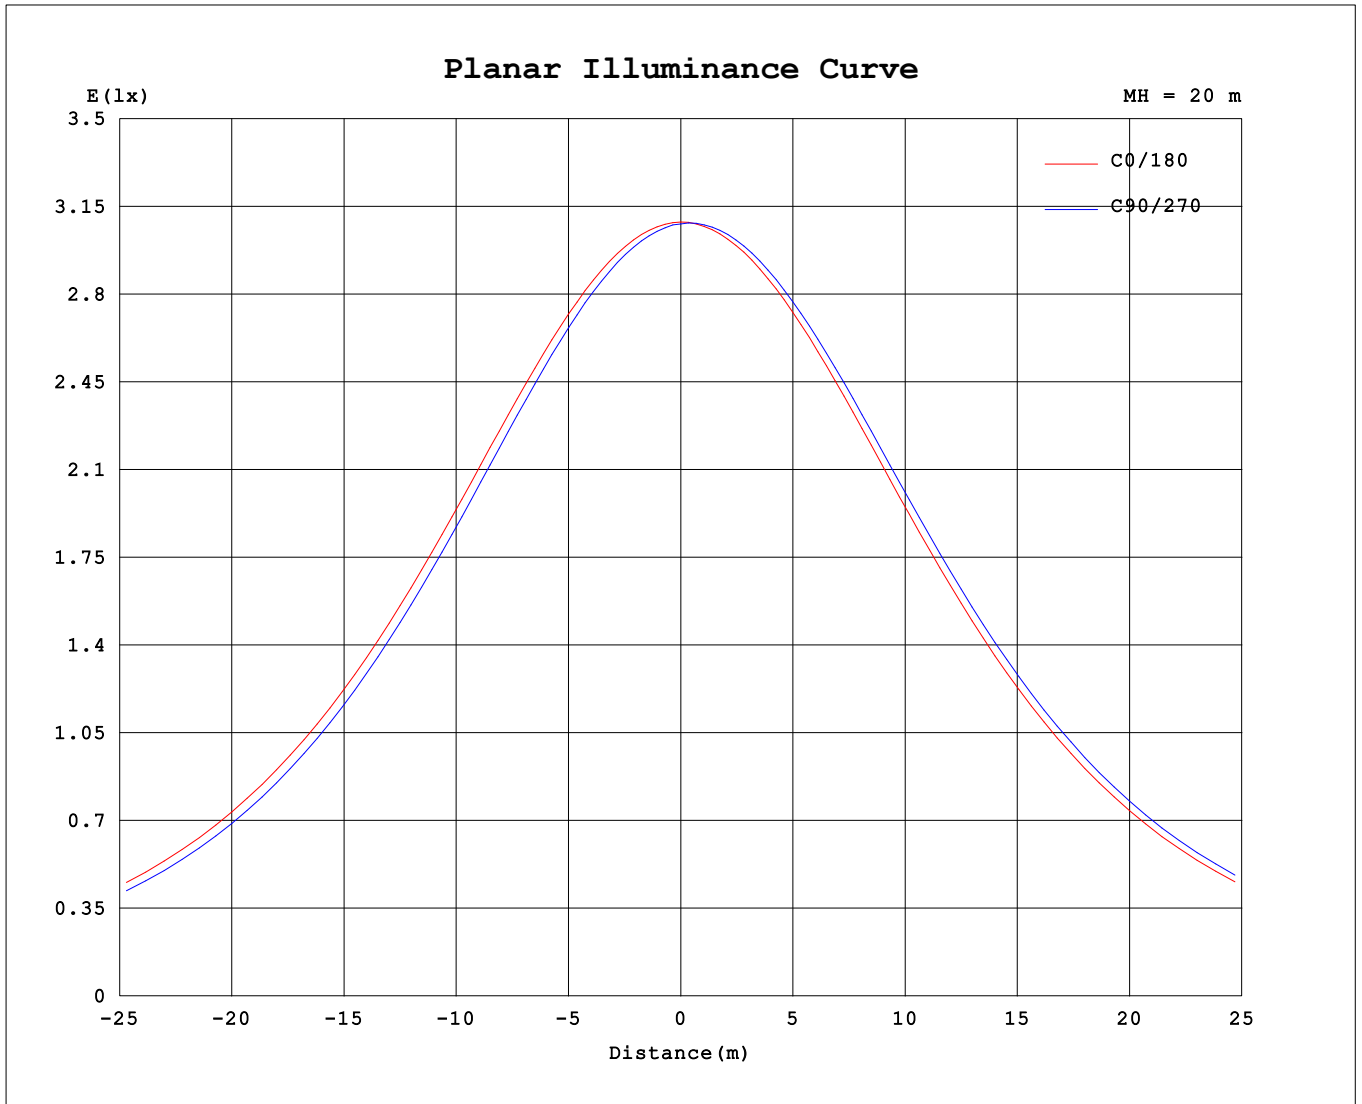

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-03-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 8.420m [K=1.0000]
 Remarks:

