




POWER-LITE®

Certainty at The Speed of Light



LED VEET & IPART APPROVED

PANEL

LED-LPE

The POWER-LITE® LED Panel is produced using state of the art automated production lines, to provide a cost effective LED panel for all applications. VEET & IPART approval enables the client to receive a rebate when installed in an eligible installation in NSW & VIC.



APPLICATIONS

- Office
- Healthcare
- Retail
- Domestic
- Commercial



☎ 1800 909 306
 🌐 nedlandsgroup.com.au
 ✉ sales@nedlandsgroup.com.au




POWER-LITE®

Certainty at The Speed of Light

DIMENSIONS


LED-LPE28W-60SQ-CC

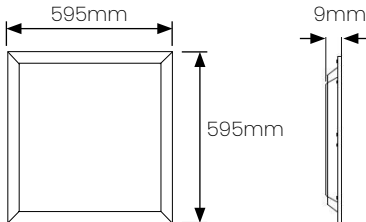

LED-LPE28W-120/30-CC



LED-LPE50W-120/60-CC

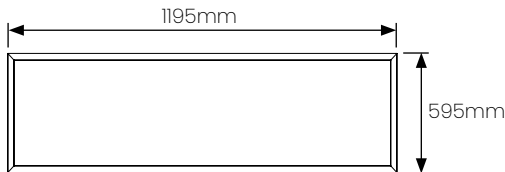

LED Chip
2835 SMD

Life Expectancy
50,000 hrs TM-21

Working Temp
-20°C to +50°C

Power Factor
>0.9

CRI
>80

Efficacy
Up to 128lm/W

LED Driver
Lifud SAA approved
Flicker free

Connection
1.2m cable with SAA plug

Material
Aluminium, Iron &
Polystyrene

Carton Qty
5



3CCT



3000K



4000K



6000K



AC220-240V
DC 30-40



White Frame
Colour

PRODUCT SPECIFICATIONS CODE

PRODUCT	SPECIFICATIONS	CODE
LED PANEL	28W 600mm x 600mm Net Weight 2.8kg	3000K 3136lm 4000K 3444lm 6000K 3276lm LED-LPE28W-60SQ-CC
	28W 1200mm x 300mm Net Weight 3.8kg	3000K 3192lm 4000K 3521lm 6000K 3332lm LED-LPE28W-120/30-CC
	50W 1200mm x 600mm Net Weight 5.6kg	3000K 5152lm 4000K 5934lm 6000K 5336lm LED-LPE50W-120/60-CC



IP20



110°
Beam Angle















POWER-LITE®

Certainty at The Speed of Light

ACCESSORIES

CODE

FLUSH MOUNT PANEL KIT

	To fit Panel Size	Overall Frame Coverage		CODE
	 595mm x 595mm	 626mm x 626mm	 602mm x 602mm	LED-LPFM-60SQ
	 1195mm x 295mm	 1236mm x 336mm	 1226mm x 326mm	LED-LPFM-120/30
	 1195mm x 595mm	 1220mm x 620mm	 1202mm x 602mm	LED-LPFM-120/60

LED DRIVERS

Options



STANDARD



For 28W LED light panels

LED-LP28W-D



DALI DIMMABLE



For 28W LED light panels

LP30W-D-DIM



EMERGENCY KIT



For 28W LED light panels

LED-LPE30W-DALI



For all LED light panels

LPE-EP

SENSORS

Mount Type

Detection Range

Detection Distance



Recessed



360°



12m

MS-12M-360



360°



16m

MS-8M-360-MW



Surface Mount



360°



6m

MS-6M-360



360°



12m

MS-12M-360-SM



180°



12m

MS-12M-180



360°



16m

MS-8M-360-SM-MW






POWER-LITE®


Certainty at The Speed of Light

PHOTOMETRICS


LED-LPE28W-60SQ-CC | 3000K

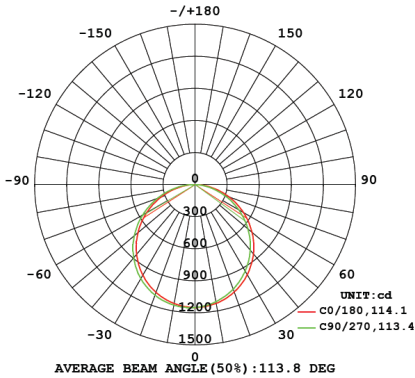


LED-LPE28W-60SQ-CC | 4000K

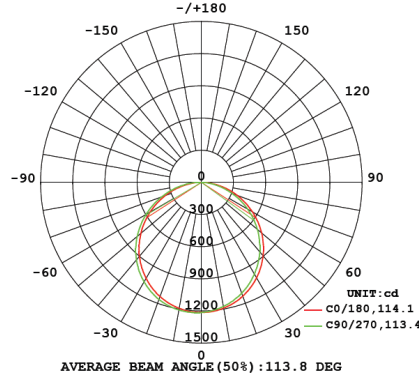


LED-LPE28W-60SQ-CC | 6000K

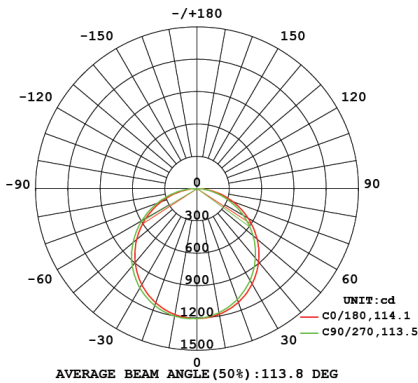


LED-LPE28W-120/30-CC | 3000K

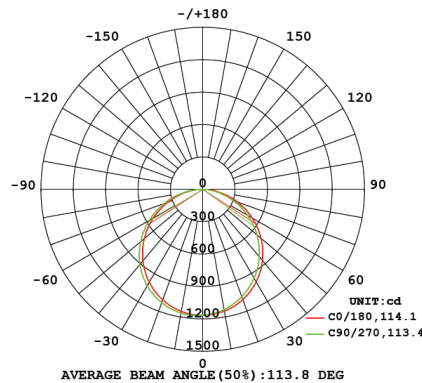

LED-LPE28W-120/30-CC | 4000K

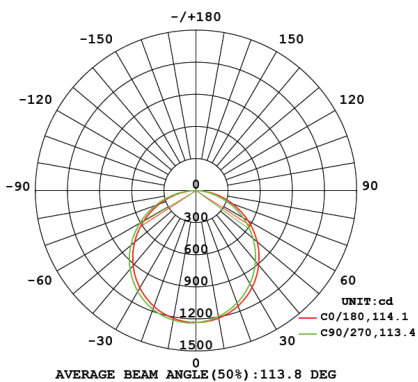

LED-LPE28W-120/30-CC | 6000K

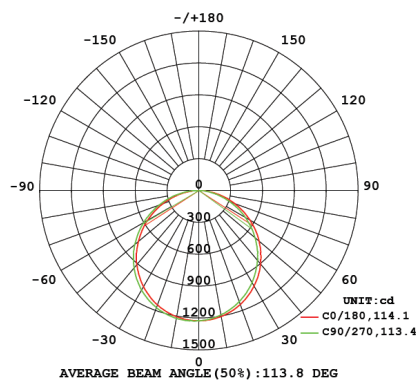




POWER-LITE®


Certainty at The Speed of Light

PHOTOMETRICS

LED-LPE50W-120/60-CC | 3000K

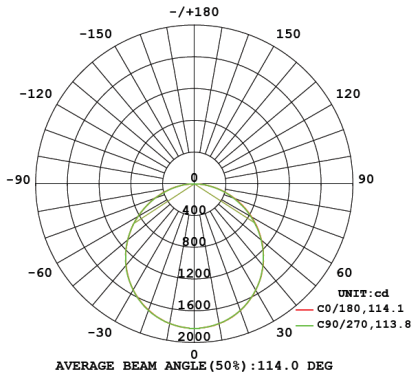

LED-LPE50W-120/60-CC | 4000K

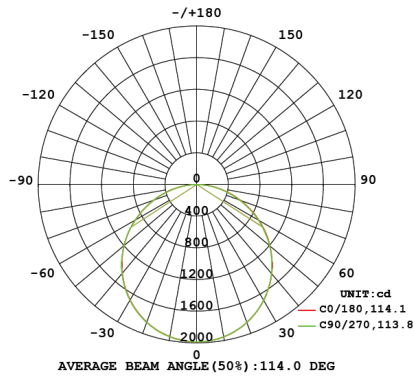

LED-LPE50W-120/60-CC | 6000K

